




V-ZUG Australia Pty. Ltd
2/796 High Street East Kew Vic 3102, VICTORIA/Australia
Phone +61 (03) 9832 7500
enquire.au@vzug.com, www.vzug.com

Brochure GKD46TIMAS Fusion

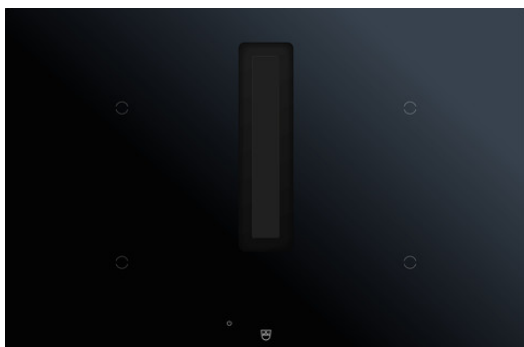

Selected product

- Article no.: 3109465415
- EAN code: 7630029429747
- Hero-Name: Fusion
- OptiGlass
- Controls: TouchControl
- Standard width: 80 cm
- Front design: BlackDesign
- Frame: DualDesign



Details GKD46TIMAS

Produktdatenblatt Kochfelder

- Cooking zones: 4
- Heating technology: induction cooking zones

Design

- Hero-Name: Fusion
- OptiGlass
- Controls: TouchControl
- Standard width: 80 cm
- Front design: BlackDesign
- Frame: DualDesign

Dimensions

- Cut-out height: 8.5 mm
- Cut-out radius: 5 mm
- Appliance height: 206 mm
- Appliance width: 761 mm
- Appliance depth: 501 mm
- Appliance corner radius: 1.5 mm
- Support size width: 750 mm
- Max. support size width: 750 mm
- Support size depth: 490 mm
- Max. support size depth: 490 mm
- Installation height when flush-fitted: 206 mm
- Installation height when surface-mounted: 202 mm
- Cut-out width when flush-mounted: 767 mm
- Cut-out width when surface-mounted: 750 mm
- Max. cut-out width when surface-mounted: 750 mm
- Cut-out depth when flush-mounted: 507 mm
- Cut-out depth when surface-mounted: 490 mm
- Max. cut-out depth when surface-mounted: 490 mm
- Empty weight: 23.5 kg
- Cooking zone 1 position: front left
- Cooking zone 1 dimensions: 18 cm
- Cooking zone 2 dimensions: 21 cm
- Cooking zone 3 dimensions: 21 cm
- Cooking zone 4 dimensions: 18 cm

Display and operation

- Display: Graphic touch display
- Controls: TouchControl
- Slider control
- Languages in display: de, en, fr, it
- Button sound (on/off)

Energy

- Energy efficiency rating: B
- Annual energy consumption: 50.2 kWh
- Fluid dynamic efficiency: 25.9
- Fluid dynamic efficiency rating: B
- Cooking zone 1 max. power: 3000 W
- Cooking zone 2 max. power: 3500 W
- Cooking zone 3 max. power: 3700 W
- Cooking zone 4 max. power: 3000 W
- Type of connection (1): 380-415 V 2N~
- Type of connection (2): 380-415 V 2N~
- Frequency (1): 50 Hz
- Frequency (2): 50 Hz
- Connected loads (1): 7.4 kW
- Connected loads (2): 7.4 kW
- Fuse protection (1): 16 A
- Fuse protection (2): 32 A
- Plug type: cable

Hob features

- OptiGlass
- Hob category: Induction
- Operating time with shut-down function
- Residual heat indicator
- Timer
- Restore function
- Cooking zones: 4
- Power levels: 9
- Heating technology: induction cooking zones



Range hood features

- Power levels: 9

Functions

- Extracted air
- Heating function
- Childproof lock
- Powerplus
- Pause button
- Warming function
- Automatic warm-up function
- Cleaning lock
- Zone connection
- Melt function
- Simmer function

Additional data

- Grease absorption capacity rating: C
- Extracted air output, intensive setting: 582.8 m³/h
- Extracted air output, max. setting: 371 m³/h
- Extracted air output, min. setting: 66 m³/h
- Recirculation air output, intensive setting: 521 m³/h
- Recirculation air output, max. setting: 350 m³/h
- Recirculation air output, min. setting: 16 m³/h
- Extracted air noise output, intensive setting: 68 dB(A)
- Extracted air noise level, max. setting: 60 dB(A)
- Extracted air noise output, min. setting: 28 dB(A)
- Recirculation air noise output, intensive setting: 75 dB(A)
- Schallleistung Umluft max. Stufe: 66 dB(A)
- Recirculation air noise output, min. setting: 31 dB(A)
- Feature level: 5

Preisschild Dunstabzüge

- Extracted air

Service and interfaces

- WLAN as standard: 802.11 b/g/n
- Warranty: 2 years