

Series 4, Slideout rangehood, 90 cm, Silver metallic DFS097A51A



DWZ1IT1D1	Long Life recirculation kit external
DWZ1IX1B6	Clean Air Plus odor filter (replacement)
DWZ1IX1C6	Clean Air Plus recirc. kit external
DWZ2IT1B4	Clean Air Standard odor filter (repl.)
DWZ2IT1I4	Clean Air Standard recirculation kit
DSZ4920	Installation kit for 90cm wide wall unit
DSZ4961	Lowering frame
DSZ4982	Handle strip white
DWZ0IT0P0	Long Life odor filter (replacement)
DSZ4986	Handle strip black
DSZ4561	Standard odor filter (replacement)
DSZ4565	Standard recirculation kit

Slideout rangehood: barely visible integrated in the wall unit, this ensures a sleek and clear kitchen finish.

- **EcoSilence Drive™**: the powerful, energy-saving drive for hoods.
- **LED lighting**: for perfect, energy-efficient illumination of the cooktop.
- **Intensive speed setting**: removes strong kitchen odours especially quickly and effectively.
- **With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality.**
- **Dishwasher-safe metal grease filters for easy cleaning.**

Typology: Pull-out
 Length electrical supply cord: 175.0 cm
 Min. required niche size for installation (HxWxD): 385mm x 524.0mm x 290mm mm
 Minimum distance above an electric cooktop: 600 mm
 Minimum distance above a gas cooktop: 650 mm
 Net weight: 12.5 kg
 Type of control: Electronic
 Number of power settings: 3-stages + intensive setting
 Max. air extraction: 397 m³/h
 Boost position output recirculating: 628 m³/h
 Max. air recirculation: 358 m³/h
 Boost position air extraction: 729 m³/h
 Number of lights: 3
 Noise level: 53 dB(A) re 1 pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable stainless steel
 EAN code: 4242005252459
 Connection rating: 146 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: AU plug
 Installation typology: Built-in



4 242005 252459

Series 4, Slideout rangehood, 90 cm, Silver metallic DFS097A51A

**Slideout rangehood: barely visible
integrated in the wall unit, this ensures a
sleek and clear kitchen finish.**

Variant

- Appliance width: 898 mm
- Suitable for ducted or re-circulated extraction
- Accessory required for recirculation mode: Standard recirculation kit

Design

- Appliance colour: Steel body, metallic finish

Comfort

- Electronic controls with low-lift push buttons
- Push button controls (3 power settings plus intensive setting) with Electronic display
- 3 power settings plus intensive setting
- Intensive operation automatic revert - 6min
- Automatic run on - 10 min
- 3 x 1.5W LED
- Colour Temperature: 3500 K
- Light Intensity: 355 lux

Cleaning

- Stainless steel filter covers, dishwasher safe

Performance

- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 397 m³/h. Intensive 729 m³/h
- Noise level according to EN 60704-3 exhaust air:
 - Max. normal use: 53dB(A) re 1 pW
 - Intensive: 69 dB(A) re 1 pW
- Noise min./max. Normal Level: 41/53 dB
- With the Clean Air Plus recirculation kit (available as accessory) your appliances reaches:
 - Extraction rate in recirculation mode: Max. normal use: 358m³/h
 - Intensive: 628m³/h
 - Noise level in recirculation mode: Max. normal use: 60dB(A) re 1 pW
 - Intensive: 71 dB(A) re 1 pW
- 2 high-performance fans, Efficient BLDC-technology
- Efficient BLDC-technology


Planning and installation information

- Appliance dimensions (HxWxD): 426 x 898 x 290 mm
- Easy installation system
- Install into a 60cm cupboard (or 90cm with optional accessory)
- Installation dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m

Consumption Data


- Average Energy Consumption: 38.1 kWh/year
- Power rating: 146 W

**Series 4, Slideout rangehood, 90 cm,
Silver metallic
DFS097A51A**

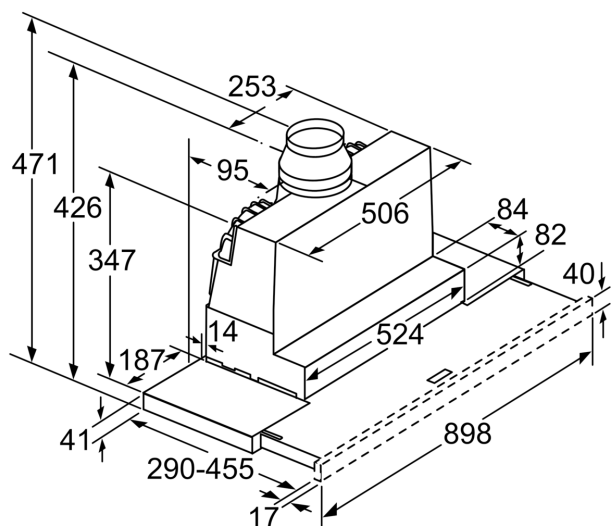


Depth of the filter
drawer can be adjusted
by up to 29 mm


measurements in mm

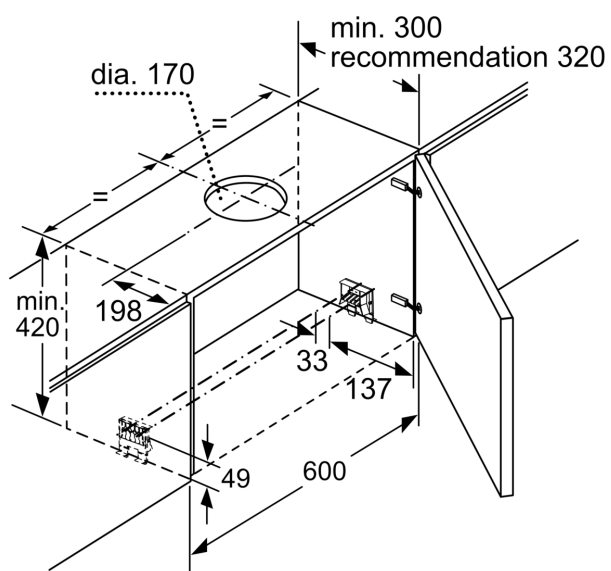

measurements in mm

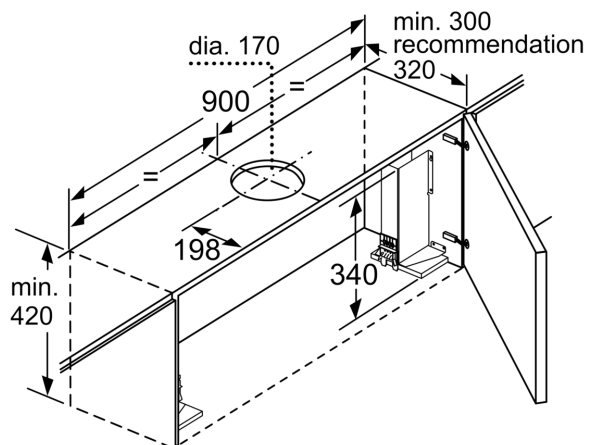

When installing the 90 cm telescopic hood in
a 90 cm wide wall-hanging cupboard,
a mounting kit is required. The two mounting
brackets are screwed onto the left and right of the
kitchen unit. Installation in accordance with template.
measurements in mm

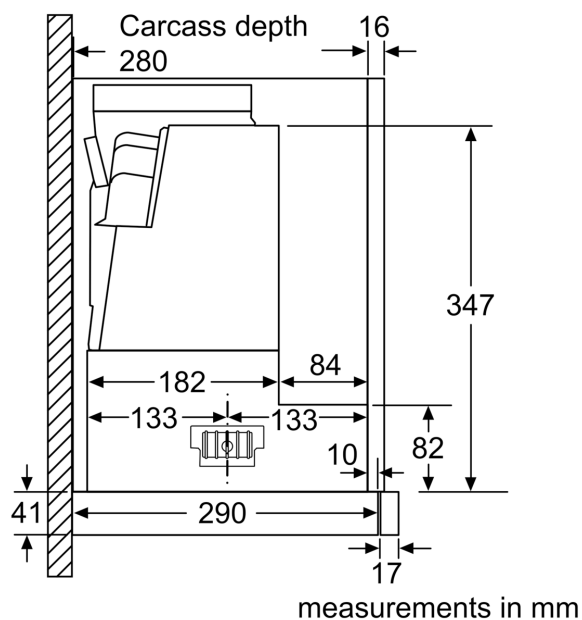

measurements in mm

