130x187MM

SOGA GARMENT STEAMER

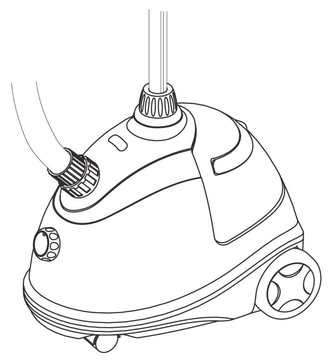

50/60Hz, 220-240Volts~, 1800Watts

LIMITED WARRANTY

This Warranty only applies if the product is purchased from Authorised Dealer.

TERMS&CONDITIONS:
1)Service Centre authorized by our company will repair the defective products excluding the Front Panels, Cabinets, Control Doors, Heating elements, Fuses, lamps, parts exposed to wear & tear, all accessories.
2)This warranty card, duly filled in by the dealer and supported by proof of purchase must be presented at the Service Centre authorized along with the defective product.

PERIOD OF WARRANTY:
1 year from date of purchase or until the date of expiry stamped on this warranty card, whichever is earlier.

THIS WARRANTY IS NOT APPLICABLE IF:
1)Damage is caused in transit or by accidents, natural calamities, mis-use, failure to follow operation instructions, fluctuations in electrical supply, or by other external factors.
2)Units are tampered with or repaired by technicians / service facilities that are not authorized.
3)This warranty card has been tampered with or not produced with the set. Warranty becomes invalid if the card is not filled in correctly at the time of purchase.
4)The Product has been used for commercial purposes or on commercial premises such as exhibitions, trade fairs, video libraries, theaters, shops, supermarkets, restaurants etc.

We are not liable for any direct of indirect or incidental or consequential damage arising from the use or inability to use our product, even if advised of the possibility of such loss or damage. In no case shall our liability exceed the amount paid by you for the product. This limited legal rights. In the event of any disputes as warranty gives you specific regards the terms and conditions as set out in the warranty, the same shall be referred to our sole decision, whose decision will be final and binding all concerned under this warranty.

Dealer's Stamp	Warranty Details Changes to warranty card invalidates the warranty	
	Model No.	Warranty Card No.
	Serial No.	Date of expiry
	Customer Details To be filled in upon purchase	
	Customer's Name & Tel No.	Date of Purchase
	Service History To be filled in case of warranty repair	

Rep.slip No.	Rep.slip Date	Rep.slip No.	Rep.slip Date	Rep.slip No.	Rep.slip Date

Dear customer:

Thanks for choosing our garment steamer. For your convenience of operating the steamer correctly, please read the instructions carefully before operation.

(No further notice in case of changing of technical parameters.)

The picture is only for reference.

Catalogue

Brief introduction----------2
Safety reminder----------3
Accessory drawings----------4-5
Instructions of operation----------7
Installation of the clothes rack----------7
Method of steaming----------8
Excrete the remaining water in the machine----------9
Maintenance and descaling operation----------9
Storage----------9

Please read the user manual carefully before operation and keep it for future consulting.

Brief introduction

As a high-grade ironing appliance, the product is applicable to such places as home, hotel. It is an ideal helper for ironing fabric. The beautiful design, along with white half -transparent water tank can make the product more elegant.

Inspection should be made before operation.

Get rid of blockage if it exists in the steam pipe and inlet & outlet water pipe. If the power line has been damaged, instead of taking apart on your own, make the repair or replacement at a specified maintenance point or by a professional.

I Power control
Rotary switch, on and off.

II Thermostat
Thermostat fixed on the heater controls it operating in a safe range of temperature and prevents danger caused by high temperature effectively.

III Thermal fuse
The thermal fuse will be burned out when temperature of heater rises too high which prevent danger automatically.

Warning
1. Please place the spray head on the hook while not using the machine to prevent harming person or surface of objects.
2. The telescopic pole is suggested to fully unfolded to keep the steam pipe clear for steam to flow.
3. Do not drag the steam pipe too hard, otherwise it will be damaged or result the leakage of s team. Do not drag the steam pipe to move the machine.
4. If the power line is damaged,in order to avoid danger,it must be maintained or replaced in designated maintenance points specified by our company instead of replacing it by users.No electricity during water injection and cleaning period.

Parameters:
Rated voltage:220~240V~
Rated Frequency: 50/60Hz
Output power: 1800W
Water tank capacity: 1.8L
Steam discharge: 35g / min
Maximum height of supporting pole: 134cm
Minimum height of supporting pole: 52cm
Steam pipe length: 145cm

Packing list

No.	Parts	Quantity	No.	Parts	Quantity
1	Body	1	7	Fabric Brush	1
2	Water tank	1	8	Trousers clamp	1
3	Spray head	1	9	Instruction Manual	1
4	Supporting pole	1	10	Warranty Card	1
5	Hanger	1			
6	Spray head hook	1			

Trouble-shooting

Facts	Reason	Solution
Out of work completely.	1.Electrical fault. 2. Attaching plug gets loose. 3.Fuse burns out. 4.Power light doesn't work.	Check and maintain by professional staff.
Big noise inside the steam pipe with little steam out.	Steam pipe get bended under horizontal level.	Raise up steam pipe to let condensate water backflow into the machine.
Spray head leakage.	1.Spray head fracture. 2. Operate flatwise.	1.Replace spray head. 2.Move the spray head up and down vertically.
Leakage in steam pipe joint.	1.Sealing ring aging. 2. Linking joint looses.	1. Replace sealing ring. 2.Frap linking joint of steam pipe.
Water in tank outflow.	Tank fractures or has holes.	Replace the tank.
Hot water generates inside the tank.	Water pipe blocked.	Eliminate the dirt or blockage.
Steam is too small.	1. Voltage low. 2. Pipeline blocked by scale.	1.Assemble voltage stabilizer. 2.Eliminate the dirt or blockag.
Tank deformation.	1. Hot water added into the water tank. 2. Other chemical added into the water tank.	1. Use continually. 2.Replace the tank.
Power light works but no steam comes out.	1. Steam generator burns out. 2. Inside components fail.	Check and maintain by professional staff.

Safety reminder

- Don't use the product before reading the instructions.
- Careful with hot condensed water from steam vent before operation.
- Move vertically to avoid plane ironing which can lead to spray head's spraying.
- Don't put it (or be exposed to) in water or liquid.
- Operate the machine with care and keep it away from children.
- Don't add hot water into the water tank, which can cause the deformation of the water tank.
- Pay attention to the safety of plug, socket and power and don't pull or draw the plug
- Don't let the plug touch the heating part and store it after the body cools down and water has been drained.
- Drain off the water and pull out the plug for the long-term idling.
- Notify professionals for maintenance in case of part damage. Incorrect maintenance may cause injury, fire alarm and electric shock.
- Don't touch heat-emitting place or steam spray head. Pour the excess water carefully to avoid injury.
- Let the body cool down after operation.
- Pull out the plug when the machine is not in use.
- Do not pull out the steam pipe during operation.
- If the power line is damaged, make the replacement at the maintenance point.
- Don't start power first and add water later to avoid dry burning.
- The product is subject to indoor operation.
- To avoid danger the product is not suitable for children and the disabled.

- This appliance is not intended for use by persons (including children) with reduced physical,sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- Care should be taken when using the appliance due to the emission of steam.
- Unplug the appliance during filling and cleaning.

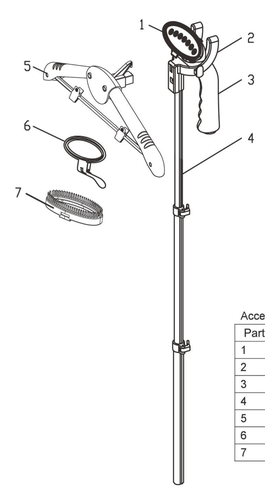

Accessory schematic diagram

Part number	Name
1	Spray head
2	Hook
3	Handle
4	Supporting pole
5	Hanger
6	Trousers clamp
7	Fabric Brush

Excrete the remaining water in the machine

In order to avoid that the user not to use the garment steamer for long time, the water inside will go bad, or provide environment for bacteria to grow. So there is a drainage cap on the bottom, you can excrete redundant water after turn off the cap. To avoid the water come out from the outlet when using next time, please tighten the cap after the water is out.

Maintenance and descaling operation

Water contains mineral substance, which can result in sediment accumulation in the appliance and impact the heating efficiency and spurt of steam. The sediments shall be often cleaned and removed (warm tip: please do the descaling operation once a week if using frequently). The following ways are suggested for descaling:
1: Firstly turn off the power switch and pull up the plug so as to make this machine complete cooling.
2: Make sure the appliance is completely cool. Take the appliance outdoor, as the water will come out from the appliance. Then open the drainage cap on the bottom of the appliance (see picture A),place a full filled water tank on the appliance, so the water will flush the boiler and take out the sediment out. If the sediments is not completely cleaned, repeat above process until the boiler is cleaned.
3: If anything blocks the steamer output, do not use the appliance until the output is cleaned. The blockage may increase the pressure inside of the appliance. Use small pincers or other suitable tools to take the blockage out.



Storage

1: Make the telescopic pole to the shortest, then remove the hose and put it aside.
2: Take the water tank, and pour out remaining water and clean up, then put back.
3: Open the drainage cap on the bottom, and pour out remaining water.
4: Clean the hose joint with clean water, make the hose around on the telescopic pole. Put the spray head on the hook.
5: Put the machine in a dry place.

Method of Steaming:

1: The effect of high temperature steam is to soften clothes fiber. If only rely on the steam from the spray head is hard to steam clothes smoothly. Gently pull the clothes surface flat, and use the steam to soften clothes fiber is the key to steam the clothes.



2: Attach the spray head to the clothes surface closely, move the spray head up and down gently. Steam the area you need, meanwhile fix the clothes surface flat and smooth by pulling.

3: Hold the side of clothes when steaming the bottom of clothes. Steam up and down, right and left. Be careful of the steam from the spray head. Wearing a glove is recommended.
4: Place the steaming assistant board under the collar, press the spray head a bit harder down on the collar, keep the spray head on the collar a little longer.



5: The same way to steam the sleeve like steaming the collar.
6: Then steam the other side.

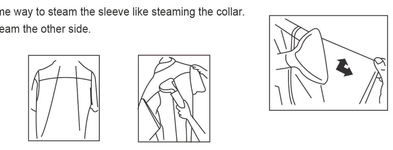

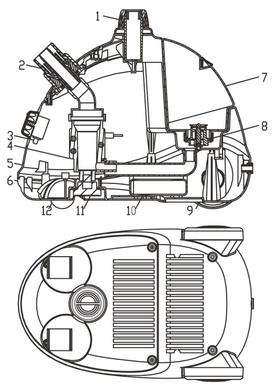

Accessory schematic diagram

Part number	Name	Part number	Name
1	Pipe fixing cap	7	Water tank
2	Steam pipe connector	8	Water tank cover
3	Switch	9	Big wheel
4	Heating coil tank	10	Extra weight block
5	Body	11	Drainage cap
6	Base	12	Direction wheel

Installation and operation

1. Insert the supporting pole into the body, and then screw it up with the cap.

2. Unfold the supporting poles to the proper height and fix them.

3. Place the hook on the top of the supporting pole. and Place the hanger on the hook. unfold the hanger.

4. Insert the head of the steam pipe into the sheath, and screw it up according to the drawing direction .

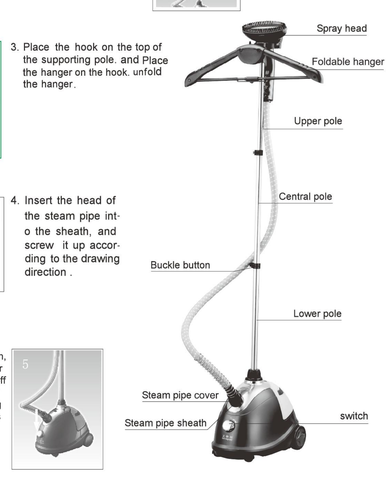

5.Turn on the switch, wait for a while for the steam. Turn off the machine after you finish. Unplug the plug while it is unused.

Instructions of operation
1: Please make sure the power switch is off before start of work.
2: Take out the water tank, turn off the tank nut on the bottom(see picture 1), fill the water into the tank, then tighten the nut. Pay attention that only fill with cold water, not hot water. In order to extend the life of the machine, we suggest that you may use the water that does not contain minerals or distilled water.Put back the water tank, and make sure that the position is installed correctly. (see picture 2)
3: Connect the plug with the power socket.
4: Open the switch, the steamer starts to work when the power indicator is turned on, steam will come out from the spray head within 45 seconds.
5: Switch off the machine after finishing steaming, the power indicator will be turned off, the machine stops working. Disconnect the plug from the power socket.

P1

P2

Usage of the Trousers clamp

Attach the trousers clamp to the spray head, so that it can be used to clamp trousers while steaming.

Installation of the clothes rack

1: Firstly, put hook A on the supporting pole B.Then attach the hanger D to the hook, making the hanger D fastening down vertically.
2: Opening the two sides of hanger (see picture d), take out the small aluminum pole from the packing-case, firstly insert one end of the pole into the hole on the hanger. Then insert the two trousers clips through the pole from the other end. Meanwhile the other end of the pole should aim and insert to the other hole on the hanger. At last, move the two clips to appropriate positions.



P a P b P c P d P e