

# K224/1X90 rangehood

code 13405

ID220609

## 90cm wall-mounted canopy with telescopic chimney



FINISH	satin stainless steel
SIZE	900mmW x 480mmD — maximum height 1340mm
INSTALLATION	wall mount
MOTOR	198 watt capacitor start, centrifugal, double impellor, two-directional air uptake
AIR EXTRACTION	exhaust to atmosphere or recirculate to kitchen
CAPACITY	942m <sup>3</sup> /hr gross, 760m <sup>3</sup> /hr net
SPEEDS	three plus OFF push buttons
ILLUMINATION	two 20-watt halogen, separate ON/OFF button
FILTRATION	3 x aluminium 4-ply grease filters, removable, washable
NOISE	44–60 dBA
DUCTING	150mm diameter ducting required
RECIRCULATION	upper chimney vented for optional recirculation
OPTIONAL	<ul style="list-style-type: none"><li>• half wall plate, 900mmW x 650mmH, code 14202</li><li>• full wall plate, 900mmW x 1600mm H, code 14203</li><li>• activated charcoal filter pair, part number 31264001</li></ul>
WARRANTY	two years parts and labour

### PERFORMANCE

With a true net air extraction of 760m<sup>3</sup>/hr net an hour, the more vigorous styles of cooking, such as pasta boiling, griddle and stir frying, are catered for. At the touch of the speed control, the power can be switched down for the gentlest of simmers.

### LOW MAINTENANCE

Easy cleaning is a premium with wipe-over 18/10 grade stainless steel surface. A single lift-out stainless steel and aluminium four-ply grease filter is even dishwasher safe. The lighting and speed controls are underslung and forward away from most of the vapour trail and there is easy access to the twin light globes.

### QUIETNESS

44 to 60 dBA. The motor/impellor encasement and internal flue are smooth-walled to eliminate air drag and noise, hand-finished welded metal joins for no vibration.

### SAFETY

Thermal overload protector on motor; fire-retardant hardened metal and mesh. VO self-extinguishing polycarbonate for motor housing and internal flue.

### DUCTING

Extracting the air direct to atmosphere ensures the maximum removal of grease/oil/particle-laden vapour, odours and, very importantly, the heat, resulting in a cleaner, more comfortable cooking environment. An internal ducting pipe could, ideally, continue in a straight line within the decorative flue to the kitchen roof, then through the roof cavity and exit via a roof cowl.


If the rangehood is mounted against an internal wall, the ducting could, as effectively, exit at the rear anywhere along the vertical line of the concealing decorative flue and at a position that is structurally feasible for an external wall cowl.

# K224/1X90 rangehood

code 13405


ID220609

## 90cm wall-mounted canopy with telescopic chimney

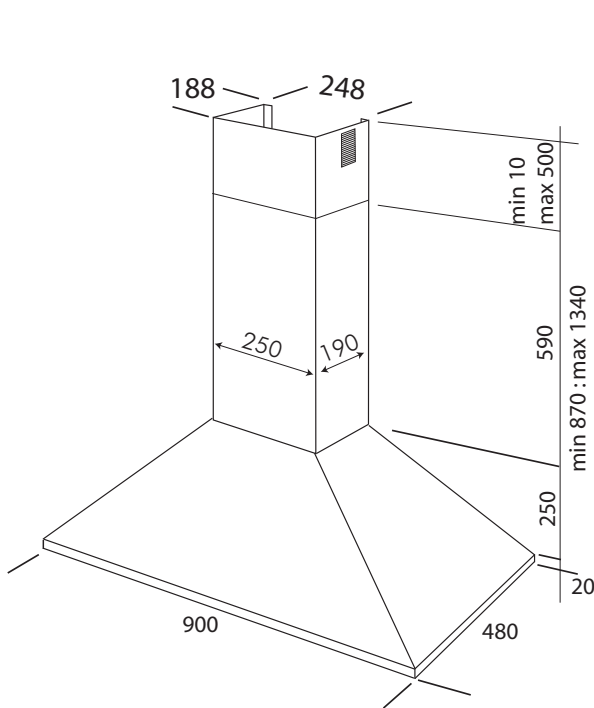


height	870mm minimum, 1340mm maximum
width	900mm
depth	480mm
packaged dimensions	980mm x 580mm x 370mm = 0.22m <sup>3</sup>
weight	12.8kg net, 16.8kg gross
air extraction	942m <sup>3</sup> /hr gross, 760m <sup>3</sup> /hr net
noise rating	44-60 dBA
electricity supply	240 volt, 50 Hz
electrical connection	connected power cord with 3-pin plug suitable for standard 10 amp GPO
power cord length	1.57 cm
wattage	<b>motor</b> 198 watts <b>lights</b> 2 x 20 watt halogen <b>total</b> 238 watt
current	1.0 amp
air exit aperture	150mm diameter
supplied	<ul style="list-style-type: none"><li>• instructions for installation, operation and maintenance</li><li>• screws for wall mounting</li><li>• one-way butterfly valve (optional use)</li><li>• 150mm diameter air exit aperture collar adaptor</li></ul>

**PLEASE NOTE: drawings are not to scale. They are to assist only.**

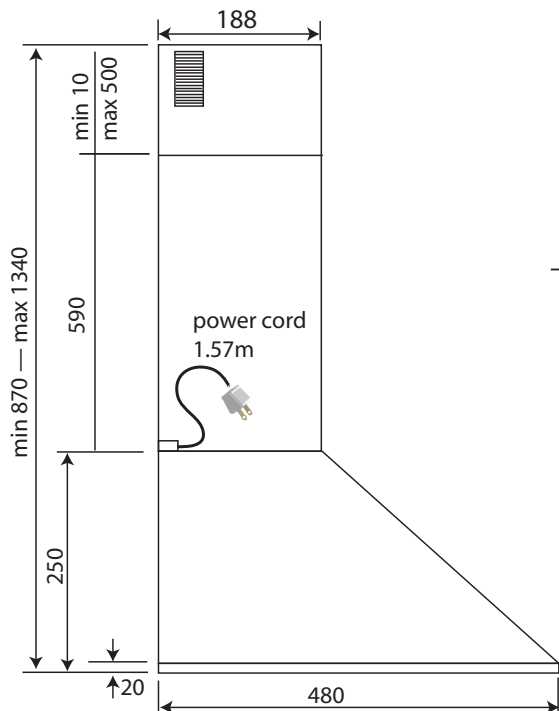

SIDE ELEVATION

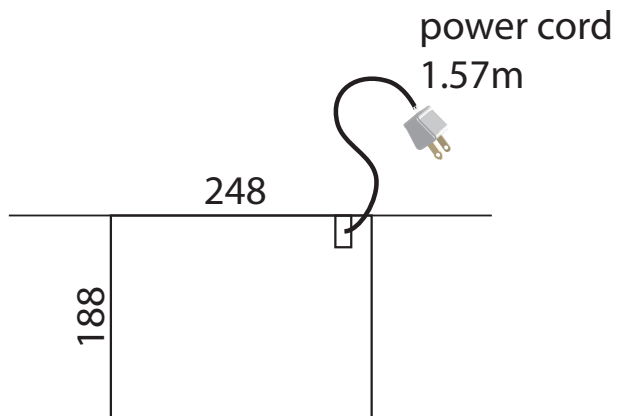

CHIMNEY PLAN

WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.