

IWSL6040CA

60CM 4 ZONE 10 AMP BUILT IN INDUCTION COOKTOP

FEATURES & BENEFITS

INDUCTION TECHNOLOGY
Induction technology heats the pan, not the hob, reducing energy dispersion as well as achieving faster and energy-effi cient cooking.

SMART POWER SHARING
Smart energy management system that distributes a fixed electrical current of 2200W across multiple cooking zones.

CHILD LOCK
Featuring a Child Lock function to prevent toddlers and children from accidentally using the hob.

EASY PLUG & PLAY
The 10amp plug allows for a fast, hassle-free installation, getting your kitchen up and running in moments.

STOP & GO
Suspend the cooking process if you're interrupted then re-start again at the same temperature in an instant with the Stop & Go function.

WARRANTY
5 Year warranty on parts and labour.

CONTROL PANEL



DISTRIBUTED BY ARISIT PTY LTD
40-50 Mark Anthony Drive, Dandenong South VIC 3175
Ph: 1300 762 219 Fax: 03 9768 0838 Website: www.arisit.com

11/2026



IWSL6040CA

60CM 4 ZONE 10 AMP BUILT IN INDUCTION COOKTOP

TECHNICAL SPECIFICATIONS

PRODUCT DETAILS

MODEL NUMBER	IWSL6040CA
GTIN	4895120712607
PRODUCT TYPE	60cm Induction Cooktop
COLOUR/FINISH	Black Ceramic Glass
CONTROL TYPE	Touch Control
LOCATION OF CONTROL PANEL	Front

FEATURES & FUNCTIONS

NO. OF COOKING ZONES	4
COOKTOP FUNCTIONS	Stop & Go
FEATURES	CHILD LOCK, TIMER, PAN DETECTION, RESIDUAL HEAT INDICATOR, AUTO PAN DETECTION, AUTO SHUTDOWN, OVER-HEAT PROTECTION, OVER-FLOW PROTECTION

SPECIFICATIONS

LEFT FRONT ZONE	2000W (Φ210mm)
LEFT REAR ZONE	1500W (Φ160mm)
RIGHT FRONT ZONE	1500W (Φ160mm)
RIGHT REAR ZONE	2000W (φ210mm)
TOTAL POWER	2200W
POWER SETTING	9 Levels
VOLTAGE	220-240V
FREQUENCY	50-60Hz
ENERGY INPUT	Electric
CONNECTION TYPE	10 AMP (Type 1 Aus Plug)
LENGTH OF POWER CORD	110cm

DIMENSIONS & CLEARANCES

PRODUCT DIMENSIONS	W 590mm x H 56mm x D 520mm
CUT OUT DIMENSION	W 560mm x D 500mm
PACKAGING DIMENSIONS	W 635mm x H 113mm x D 568mm
CLEARANCE	Minimum of 650mm
GROSS WEIGHT	9.7 kg
NET WEIGHT	8.0 kg
PLACE OF MANUFACTURE	China
WARRANTY	5 Years Parts and Labour

CUTOUT & CLEARANCE

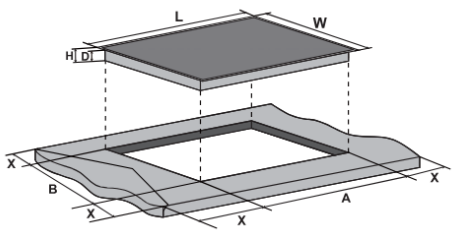



Indication	L	W	H	D	A	B	X
Dimension	590mm	520mm	56mm	52mm	560mm	480mm	50mm



Indication	A	B	C	D	E
Dimension	650mm (min.)	50mm (min.)	20mm (min.)	20mm (Air inlet min.)	5mm (Air outlet min.)