



MODEL: PHP222

## cooktop dimensions

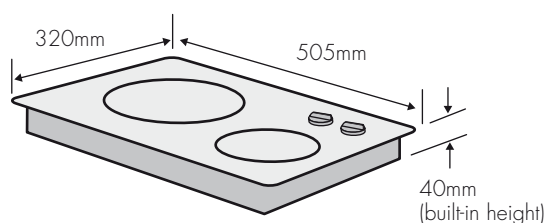

**Note:** Connection type – hardwired  
Maximum power load 3.0kW

## building-in cut-out dimensions

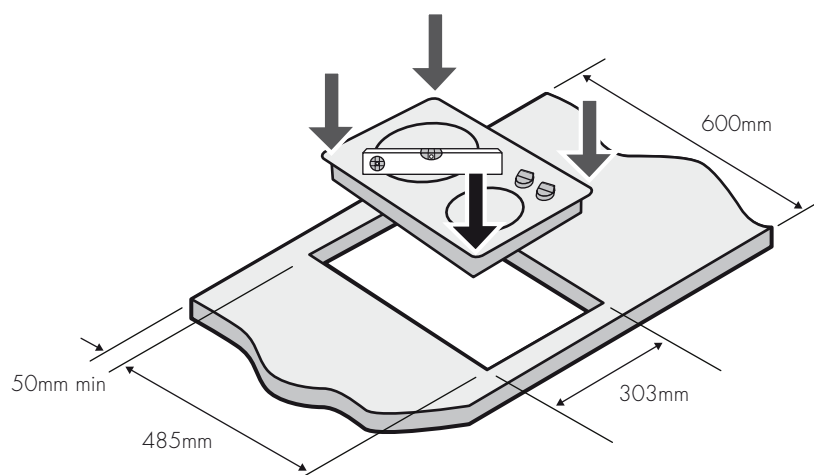

**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles.

**Note:** If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

**Note:** If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.