



COLLECTION
2017



A close-up photograph of a hand holding a small, light-colored plant root or piece of wood. The hand is positioned over a dark, textured wooden surface. In the foreground, there is a large pile of small, white, oval-shaped pills. The background is blurred, showing more of the wooden surface and the hand. The overall tone is dark and moody.

WELCOME TO THE ART OF LIVING

THE PLEASURE OF PERFECTION

A close-up photograph of a person's hand painting a piece of pottery. The hand is holding a brush with a wooden handle and a metal ferrule. The brush is applying a light-colored paint to a piece of pottery that is resting on a surface covered with a layer of white powder. In the background, there is a small white bowl containing a liquid, likely the paint. The overall scene is dimly lit, with the focus on the hand and the brush.

**PASSION &
PRECISION**

EXPLORE THE ART OF LIVING

ELECTRIC OVENS	60cm built-in compact/steam 70/90cm built-in double built-in	8
WARMING DRAWER		12
COOKTOPS	domino cooktops gas cooktops ceramic cooktops	21
FREESTANDING COOKERS	Maximus series Vulcan series	35
MICROWAVE OVENS	microwave oven convection microwave oven microwave oven trimkit	56
BENCHTOP SOLUTIONS	mini kitchen	59
RANGEHOODS	canopy concealed undermount slideout	60
SINKS	inset	70
DISHWASHERS	freestanding built-in	74
LAUNDRY	clothes dryers	80



A hand holding a wooden spoon over a pan, with a white text box overlaid.

OUR PHILOSOPHY

Welcome to Artusi cooking appliances. Inspired by the legendary Pellegrino Artusi, the father of Italian cuisine, we have created our range to live up to his legacy.

Times may have changed since he wrote 'The Science of Cooking and the Art of Eating well' but the essence of a lovingly prepared meal bringing people together will always remain.

Our products are designed with the modern day home cook in mind. Sleek lines and high in functionality and performance. And all are made to the highest global standards and go through rigorous testing procedures.

So whether you are a casual cook or a true artist in the kitchen, we want our cookers to play a part in your enjoyment of the principles laid down by Artusi himself.

Pellegrino Artusi

Pellegrino Marcello Artusi was born in the Tuscan hillside village of Forlimpopoli in 1820. With 12 siblings, food was an important topic in the Artusi household.

When the family moved to Florence he began working in finance whilst dedicating any spare time to his two favourite hobbies: Literature and Cooking.

It is at this time that his most famous work 'La scienza in cucina e l'arte di mangiare bene' (The Science of Cooking and the Art of Eating Well) started to take shape.

Artusi worshipped the scientific method of cooking. Every recipe was the result of extensive experiments, something his family encouraged as they knew they could always expect something interesting and different for dinner.

Artusi was the first to include recipes from all the different regions of Italy in a single cookbook. He is often credited with establishing a truly national Italian cuisine.

Much of what we know today about Italian food can be traced back to him and his truly revolutionary publication.

He may not have known it at the time, but Artusi encapsulated something that we all take for granted today and something that still brings the family together:

The Science of Cooking and the Art of Eating Well. It is with this philosophy in mind that we created the Artusi range of cooking appliances for today's home cook.




60CM BUILT-IN VULCAN SERIES

CAO640X electric oven with minute minder

- fingerprint-proof stainless steel
- 56 litres
- 4 functions — light, grill, fan grill, fan forced
- 120-minute countdown timer
- oven 'on' indicator light
- cavity cooling system
- 5 cooking levels
- thermostat 0–250°C
- removable door
- double-glazed tempered glass door
- baking tray
- chrome rack

i For technical diagrams please refer to page 16–19
3.5kW/hr total electrical consumption
15 AMP electrical connection, 3-pin plug fitted

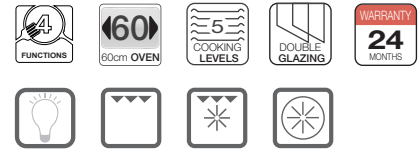

CAO651X electric oven with programmable timer

- fingerprint-proof stainless steel
- 56 litres
- 5 functions — light, grill, fan grill, fan forced, defrost
- programmable timer
- VDF display
- cavity cooling system
- 5 cooking levels
- thermostat 0–250°C
- removable door
- double-glazed tempered glass door
- baking tray
- 2 x chrome oven trays

i For technical diagrams please refer to page 16–19
3.5kW/hr total electrical consumption
15 AMP electrical connection, 3-pin plug fitted




60CM BUILT-IN MAXIMUS SERIES

AO601X electric oven with minute minder

- fingerprint-proof stainless steel
- 65 litres
- 5 functions — light, defrost, top and bottom element, fan grill, fan forced
- digital push-button clock with minute minder 0–60 min
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- double glazed
- tangential fan ventilation
- 5 cooking levels
- 1 x tray, 1 x chrome shelf


- i** For technical diagrams please refer to page 16–19
2kW total electrical consumption
10 AMP electrical connection, 3-pin plug fitted

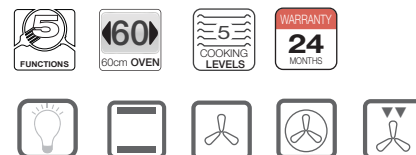

AO650GG gas oven with digital clock & timer

- fingerprint-proof stainless steel
- 65 litres
- 5 functions — fan grill, static grill, fan assisted, lower flame, light
- digital clock/timer
- knob control panel
- Ultra Clean interior enamel
- 130–250°C thermostat
- 5 cooking levels
- tangential cooling fan
- triple-glazed glass door
- easy-clean inner glass door
- oven baking tray, oven shelf

- i** For technical diagrams please refer to page 16–19
1.2 kW/hr total electrical consumption
gas rating: 2.5 kWh (natural) | 2.1 kWh (ULPG)
10 AMP electrical connection, 3-pin plug fitted

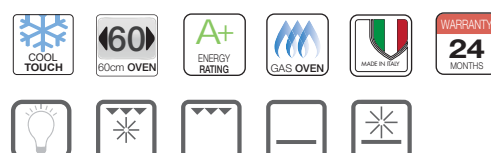

60CM BUILT-IN MAXIMUS SERIES

AO650X electric oven with bell timer

- fingerprint-proof stainless steel
- 65 litres
- 9 functions — light, top and bottom element, fan assisted, base element, half grill, grill, fan grill, fan forced
- 60-minute bell timer
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels

i For technical diagrams please refer to page 16–19
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



AO651X electric oven with programmable timer

- fingerprint-proof stainless steel
- 65 litres
- 9 functions — light, top and bottom element, fan assisted, base element, half grill, grill, fan grill, fan forced, pizza
- digital timer with touch controls
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels

i For technical diagrams please refer to page 16–19
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



AOS652X

side-opening electric oven with digital timer

- fingerprint-proof stainless steel
- 65 litres
- 9 functions —
- light, top and bottom element, fan assisted, base element, half grill, grill, fan grill, fan forced
- digital timer with touch controls
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- side-opening reversible door
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels

i For technical diagrams please refer to page 16–19
 3.5kW/hr total electrical consumption
 15 AMP electrical connection, hard wired



AO654XP

pyrolytic electric oven with digital timer

- stainless steel
- 65 litres
- 10 functions —
- light, defrost, top and bottom element, eco bake, fan forced, base heat + fan, fan grill, half grill, grill, pyrolytic cleaning
- digital timer with touch controls
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels

i For technical diagrams please refer to page 16–19
 3.5kW/hr total electrical consumption
 15 AMP electrical connection, hard wired



45CM COMPACT BUILT-IN MAXIMUS SERIES

AO450X

compact electric oven with minute timer

- fingerprint-proof stainless steel
- 43 litres
- 5 functions —
- light, top and bottom element, grill, fan grill, fan assisted
- minute minder
- control knobs
- EVER-Clean enamel cavity
- tangential cooling fan
- 5 cooking levels

- i** For technical diagrams please refer to page 16–19
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



ACS045X

steam oven with grill

- stainless steel and glass exterior and stainless steel cavity
- 31 litres
- 2 x control knobs
- halogen lighting
- steam cooking (40–130°C)
- grill function
- combined steam and grill cooking
- electronic timer (6 buttons, white display)
- safe door
- door contact switch
- tangential cooling fan
- 1 x shelf
- 1 x tray
- 1 x perforated tray

- i** For technical diagrams please refer to page 16–19
3.2 kW/hr total electrical consumption
15 AMP electrical connection, hard wired



AWD15X

warming drawer

- internal shelf surface in black tempered glass
- preheating of pots and pans, coffee cups, dinner plates
- maintaining the temperature of cooked foods
- adjustable thermostat from 40– 70°C
- operating indicator light
- cool touch front panel
- connection cable with plug
- combinable with all AO series ovens

- i** For technical diagrams please refer to page 16–19
0.4 kW/hr total electrical consumption
10 AMP lead and plug



75CM & 90CM BUILT-IN MAXIMUS SERIES

AO750X

75cm electric oven with programmable timer

- fingerprint-proof stainless steel
- 81 litres
- 9 functions —
- light, top and bottom element, fan assisted, base element, half grill, grill, fan grill, fan forced, pizza
- touch-control programmable oven timer
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels
- chrome wire shelves

- ❗ For technical diagrams please refer to page 16–19
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



AO900X

90cm electric oven with programmable timer

- fingerprint-proof stainless steel
- 81 litres
- 9 functions
- programmable touch control oven timer
- EVER-Clean enamel oven cavity
- knob controls
- flat, easy-clean oven door
- tangential cooling fan
- 5 cooking levels
- baking tray
- metal grill

- ❗ For technical diagrams please refer to page 16–19
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



COMING SOON: CAO900X 90cm built-in oven

60CM DOUBLE ELECTRIC OVEN

CAO888X double electric oven with digital timer

- fingerprint-proof stainless steel
- top oven: 35 litres
- lower oven: 55 litres
- top oven: 4 functions
- lower oven: 7 functions
- top oven: 4 cooking levels
- lower oven: 5 cooking levels
- lower oven: digital timer
- triple-glazed glass doors
- 50–250°C thermostat
- easy-clean inner glass doors
- removal oven doors
- 'ActivEnamel' easy-clean interior enamel
- 2 x chrome wire shelves
- baking tray included

i For technical diagrams please refer to page 16–19
4kW/hr total electrical consumption
15 AMP electrical connection, hard wired






AO888X double electric oven with digital timer & touch controls

- fingerprint-proof stainless steel
- 36 litres (top oven)
- 65 litres (main oven)
- 4 + 4 functions
- digital timer with touch controls
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels (main oven)
- 2 cooking levels (top oven)


i For technical diagrams please refer to page 16–19
4.25 kW/hr total electrical consumption
15 AMP electrical connection, hard wired






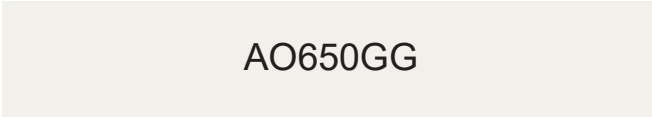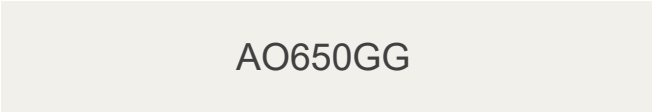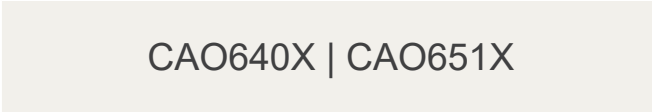


All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

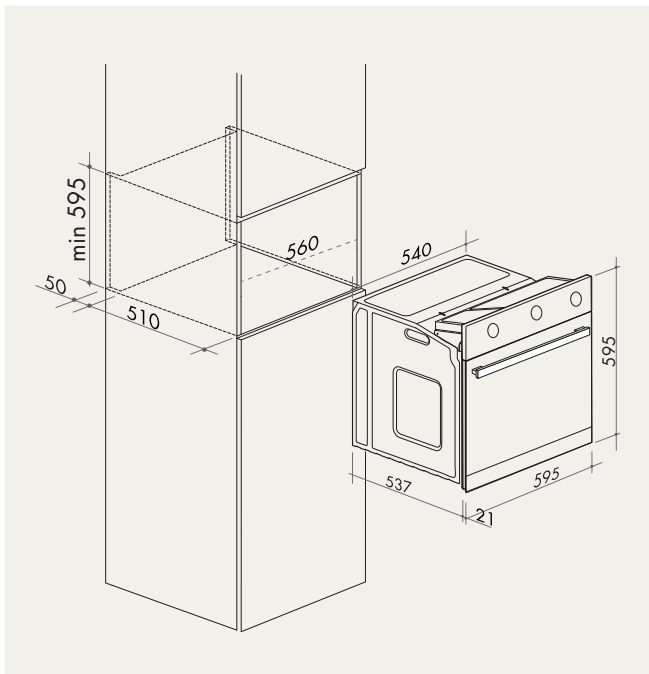

AO601X

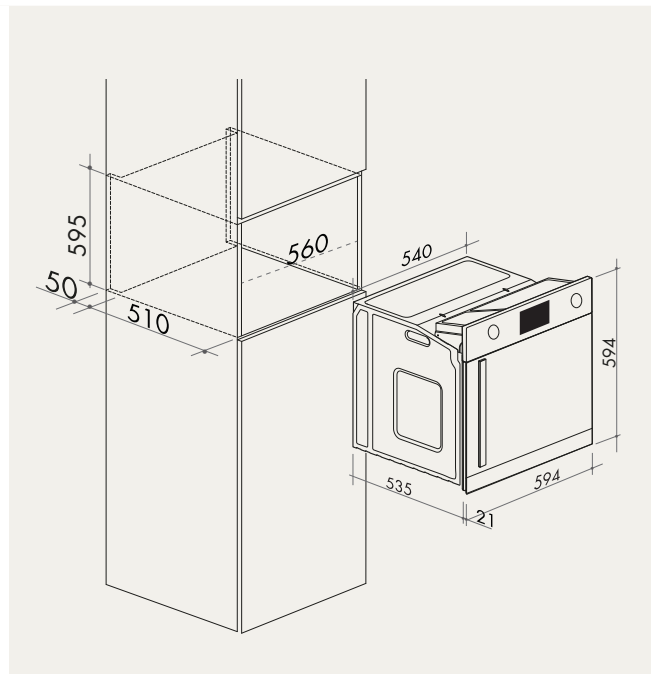


AOS652X

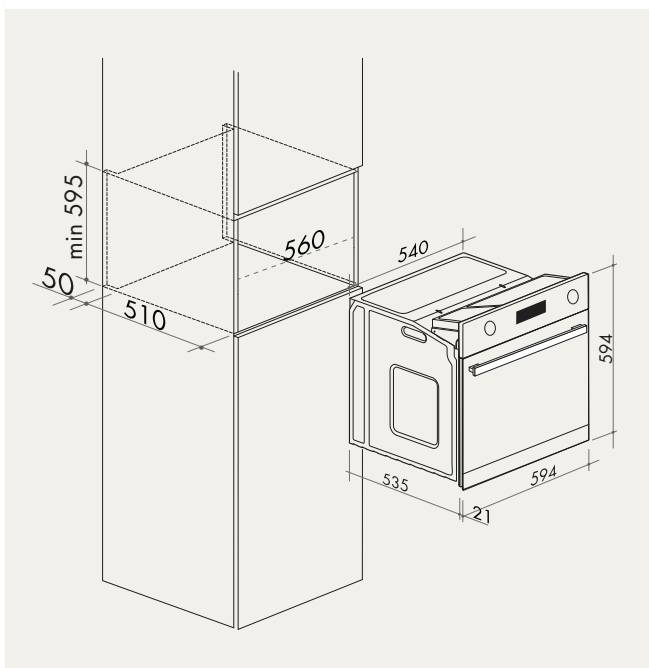


AO654XP


TECHNICAL INFORMATION

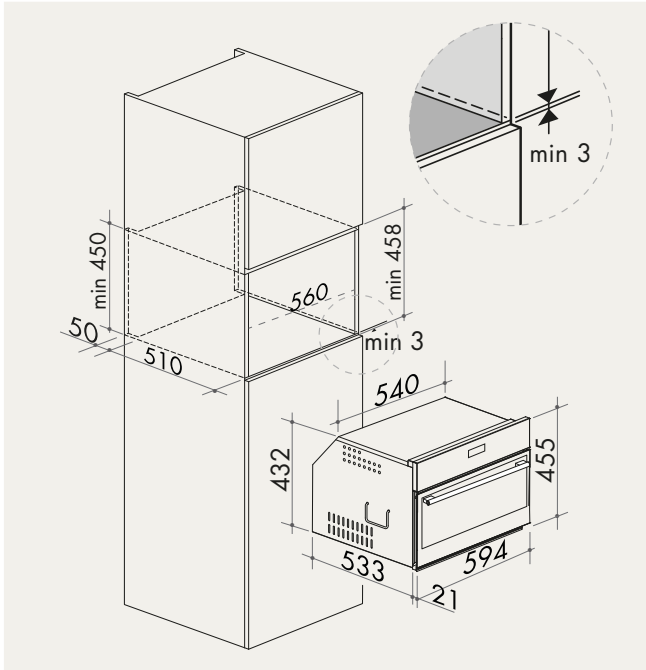

AO450X | ASC045X

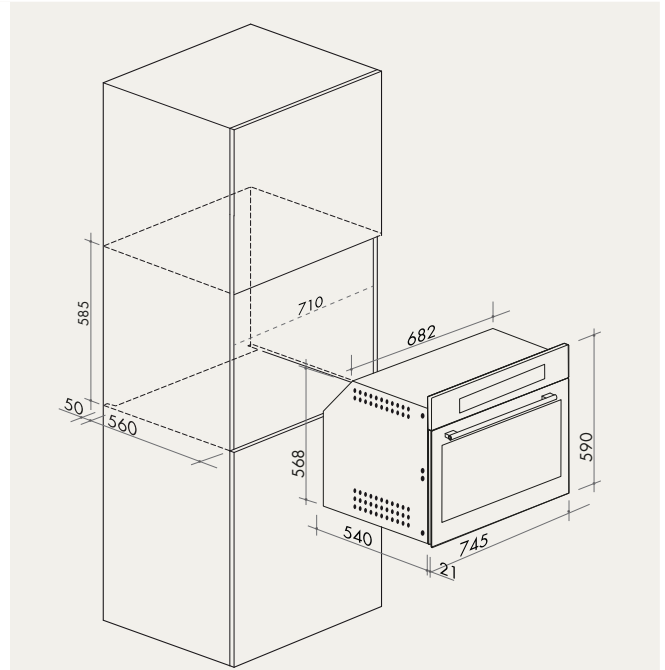


A0750X

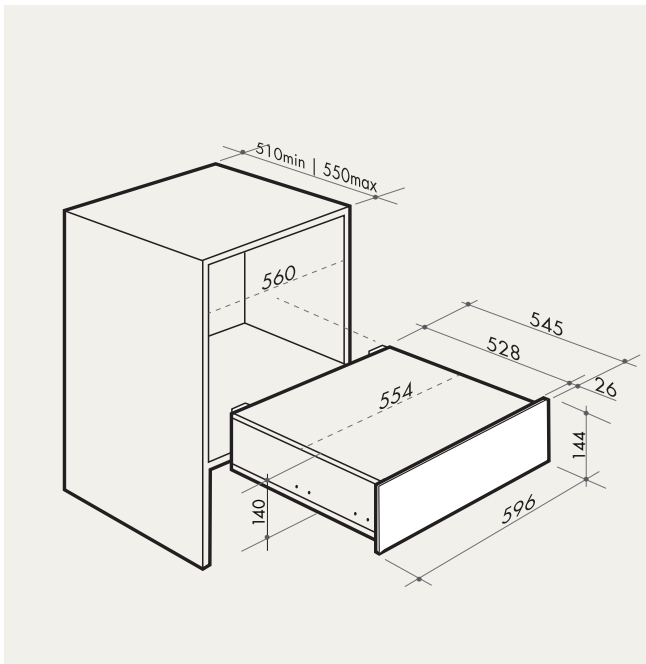


AWD15X

PLEASE NOTE:


All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

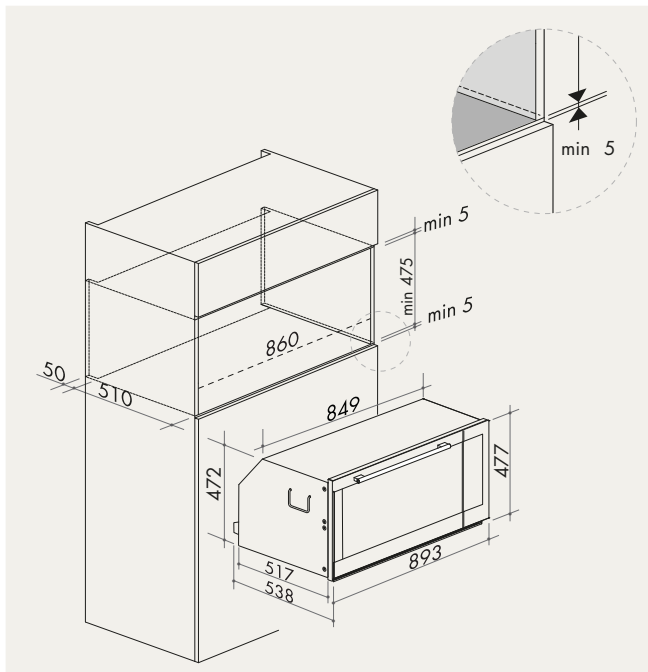

A0900X

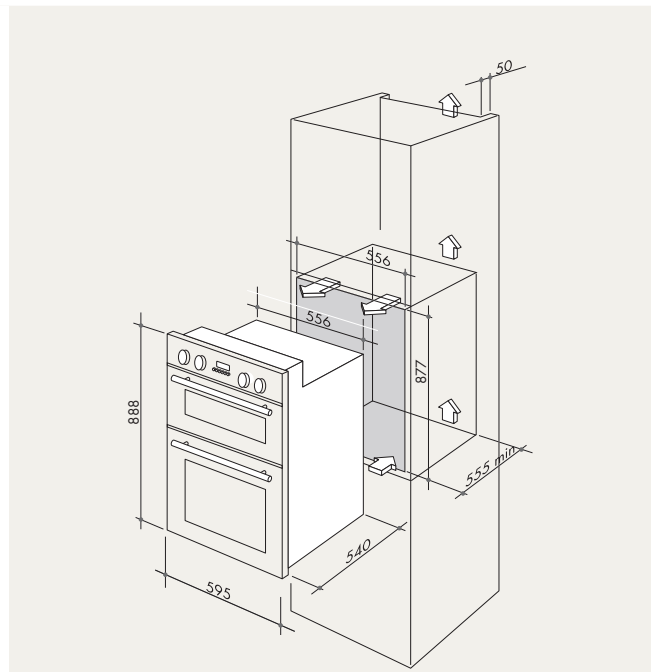

CAO888X

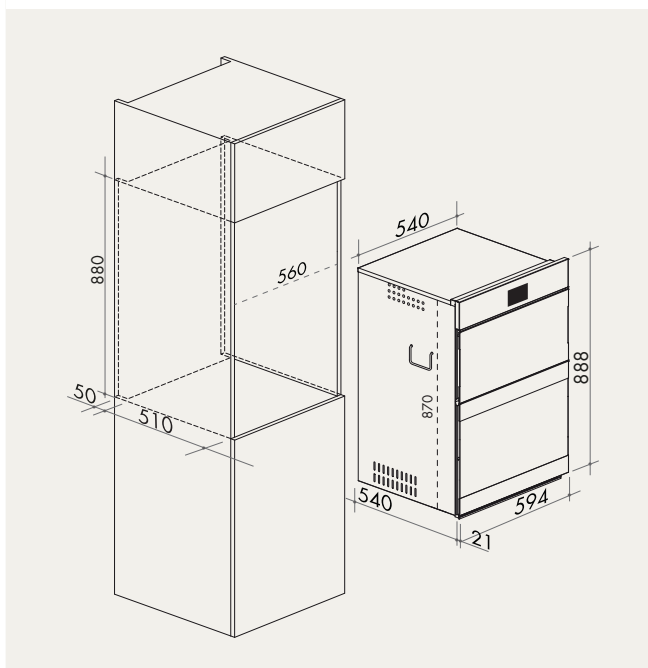

AO888X

PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.



DOMINO COOKTOPS

AGH30XFFD domino cooktop



- stainless steel
- front: 1.0 kW/hr
- rear: 3.0 kW/hr
- topmount
- 2 gas burners — simmer and rapid
- black enamel trivets and burner caps
- flame failure device fitted to each burner
- automatic electronic ignition




- i** For technical diagrams please refer to page 30–33
3-pin plug and cord: 10 AMP GPO

CACC30 domino ceramic cooktop



- black ceramic glass
- front: Ø165mm, 1200W
- rear: Ø200mm, 1800W
- 2 heat zones
- residual heat indicators
- easy-clean surface
- touch control
- child safety lock
- 9 heat levels per zone
- 99-minute timer
- automatic safety cutoff
- low profile

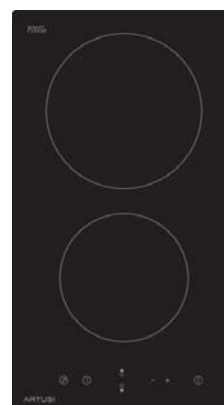


- i** For technical diagrams please refer to page 30–33
electrical connection 220–240V, hard wired

AID30 domino induction cooktop



- black glass
- rear: Ø170mm, 1400W
- front: Ø155mm, 1600W
- touch control
- 9 heat levels per zone
- automatic pan detection
- 2 timers
- egg timer
- automatic pan recognition
- automatic safety cutoff
- child safety lock
- standby consumption <0.5 W

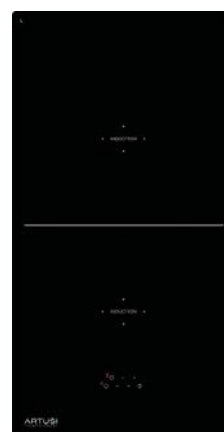

- i** For technical diagrams please refer to page 30–33
240V, 3 kW/hr, 15 Amp, hard wired

60CM GAS COOKTOPS

AGH65X 60cm gas cooktop with Flame Failure

- stainless steel
- front left wok: 3.5 kW/hr
- rear left auxiliary: 1.75 kW/hr
- front right semi-rapid: 1.0 kW/hr
- rear right semi-rapid: 1.75 kW/hr
- topmount
- 4 gas burners, including wok
- cast-iron trivets, wok cradle and burner caps
- automatic electronic ignition
- flame failure device fitted to each burner

i For technical diagrams please refer to page 30–33
3-pin plug and cord

ALSO AVAILABLE: AGH64X



CAG640XFFD 60cm gas cooktop with Flame Failure

- stainless steel
- wok: 3.1 kW/hr
- auxiliary: 1.1 kW/hr
- 2 x semi-rapid: 1.9 kW/hr
- topmount
- 4 gas burners, including wok
- stainless steel
- cast-iron trivets, wok cradle and burner caps
- automatic electronic ignition
- flame failure device fitted to each burner

i For technical diagrams please refer to page 30–33
3-pin plug and cord


ALSO AVAILABLE: CAG640X



CAG640ETXFFD 60cm gas cooktop with Flame Failure



- stainless steel
- rapid: 3.1 kW/hr
- auxiliary: 1.1 kW/hr
- 2 x semi-rapid: 1.9 kW/hr
- topmount
- 4 gas burners, including wok
- stainless steel
- enamel trivets
- electronic ignition
- flame failure device fitted to each burner

 For technical diagrams please refer to page 30–33
3-pin plug and cord

ALSO AVAILABLE: CAG640ETX



70CM GAS COOKTOPS

AGH70XFFD

72cm gas cooktop LEFT WOK with Flame Failure

- stainless steel
- left wok: 3.5 kW/hr
- 1x auxiliary: 1.0 kW/hr
- 2x semi-rapid: 1.75 kW/hr
- rapid: 3.1 kW/hr
- topmount
- 5 gas burners, including wok
- stainless steel
- cast-iron trivets, wok cradle and burner caps
- flame failure device fitted to each burner
- automatic electronic ignition

i For technical diagrams please refer to page 30–33
3-pin plug and cord

ALSO AVAILABLE: AGH70X



AGH71XFFD

72cm gas cooktop CENTRE WOK with Flame Failure

- stainless steel
- centre wok: 3.5 kW/hr
- 1x auxiliary: 1.0 kW/hr
- 2x semi-rapid: 1.75 kW/hr
- rapid: 3.1 kW/hr
- topmount
- 5 gas burners, including wok
- stainless steel
- cast-iron trivets, wok cradle and burner caps
- flame failure device fitted to each burner
- automatic electronic ignition

i For technical diagrams please refer to page 30–33
3-pin plug and cord

ALSO AVAILABLE: AGH71X



90CM GAS COOKTOPS

AGH90XFFD

90cm gas cooktop with Flame Failure

- stainless steel
- 2 x wok: 3.5 kW/hr
- 1x auxiliary: 1.0 kW/hr
- 2x semi-rapid: 1.75 kW/hr
- rapid: 3.1 kW/hr
- topmount
- 6 gas burners, including 2 x wok
- stainless steel
- cast-iron trivets, wok cradle and burner caps
- flame failure device fitted to each burner
- automatic electronic ignition

- i** For technical diagrams please refer to page 30–33
3-pin plug and cord

ALSO AVAILABLE: AGH90X



AGH91XFFD

90cm gas cooktop with Flame Failure

- stainless steel
- 1 x wok: 3.5 kW/hr
- 1x auxiliary: 1.0 kW/hr
- 2x semi-rapid: 1.75 kW/hr
- rapid: 3.1 kW/hr
- topmount
- 5 gas burners, including wok
- stainless steel
- cast-iron trivets, wok cradle and burner caps
- flame failure device fitted to each burner
- automatic electronic ignition

- i** For technical diagrams please refer to page 30–33
3-pin plug and cord

ALSO AVAILABLE: AGH91X



COMING SOON: CAGH95X 90cm gas cooktop


CERAMIC COOKTOPS

CACC604 & CACC704 ceramic cooktops




- black ceramic glass
- front left: 1800W | 200mm
- rear left: 1200W | 165mm
- front right: 1200W | 165mm
- rear right: 1000W | 200mm
- 4 heat zones
- residual heat indicators
- easy-clean surface
- knob control
- child safety lock
- 9 heat levels per zone
- automatic safety cutoff
- low profile

i For technical diagrams please refer to page 30–33
total power consumption: 5.5 kW/hr, hard wired

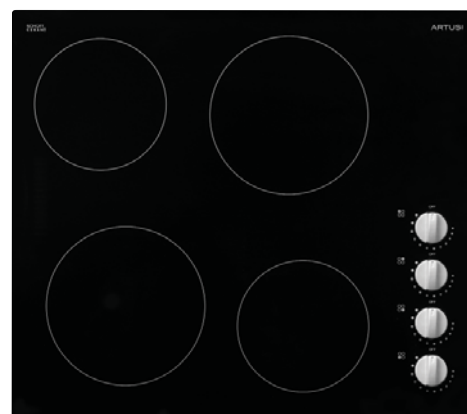

Pictured: CACC604

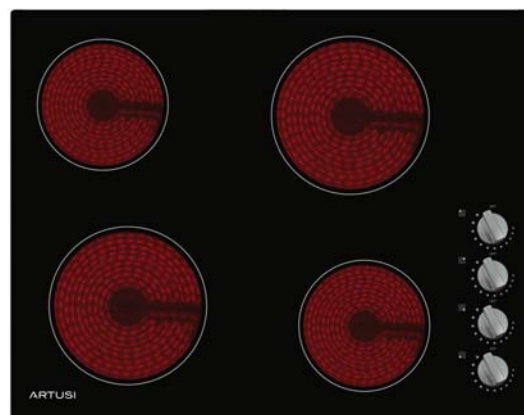

Pictured: CACC704

CACC60 60cm ceramic cooktop

- black ceramic glass
- front left: 1800W
- rear left: 1200W
- front right: 1200W
- rear right: 1800W
- 4 heat zones
- residual heat indicators
- easy-clean surface
- touch control
- child safety lock
- 9 heat levels per zone
- 99-minute timer
- automatic safety cutoff
- low profile


i For technical diagrams please refer to page 30–33
total power consumption: 6 kW/hr, hard wired



CACC70 70cm ceramic cooktop

- black ceramic glass
- front left: 1800W
- rear left: 1200W
- front right: 1200W
- rear right: 1000W, boost 2200W
- 4 heat zones (including 1 x dual zone)
- residual heat indicators
- easy-clean surface
- touch control
- child safety lock
- 9 heat levels per zone
- 99-minute timer
- automatic safety cutoff
- low profile

i For technical diagrams please refer to page 30–33
total power consumption: 6.4 kW/hr, hard wired

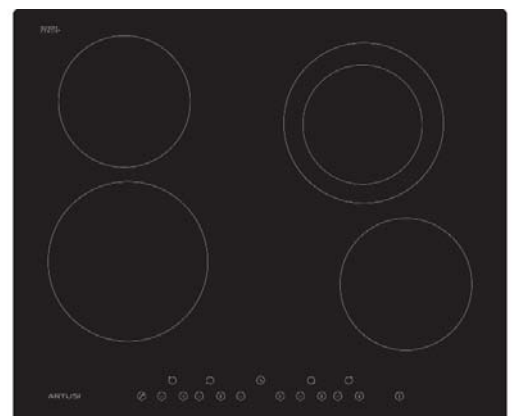

INDUCTION COOKTOPS

AID61

60cm induction cooktop

- black glass
- front left: 190mm, 1400W, BOOST 1850W
- rear left: 160mm, 1400W
- rear right: 190mm, 1400W, BOOST 1850W
- front right: 160mm, 1400W
- minimum diameter detection: 100mm
- touch control
- 9 heat levels per zone
- BOOST function on 2 zones (front left, rear right)
- cooking zone will de-activate when pan is removed
- 4 timers/simultaneous use
- residual heat indicator
- automatic safety cutoff
- child safety lock
- standby consumption <0.5 W

i For technical diagrams please refer to page 30–33
240V, 25 AMP, single phase
total power consumption: 6.5 kW/hr, hard wired



AID63

60cm induction cooktop

- black glass
- front left: 180mm, 1400W, BOOST 1850W
- rear left: 180mm, 1400W, BOOST 1850W
- right: 270mm, 1850W, BOOST 2100W
- touch control
- 9 heat levels per zone
- BOOST function on 3 zones
- cooking zone will de-activate when pan is removed
- 4 timers/simultaneous use
- residual heat indicator
- automatic safety cutoff
- child safety lock
- standby consumption <0.5 W

i For technical diagrams please refer to page 30–33
25 AMP, single phase
total power consumption: 5.8 kW/hr, hard wired




AID784


78cm induction cooktop

- KeraBlack+ glass with bevelled edges
- front/rear left zones: flexi-zone 1400W (2000W with boost)
- rear right zone: 200mm, 2300W (3000W with boost)
- front right zone: 160mm, 1400W
- ergonomic design
- slider touch control with direct access to
- 11 heating levels (0–9 + keep warm + boost)
- 2 x boosters
- 4 x timers (can be used simultaneously)
- egg timer
- stop and go (pause + memory)
- child safety lock
- zone bridge function
- residual heat indicator
- control panel lock


i For technical diagrams please refer to page 30–33
total electrical consumption: 7.1 kW/h, hard wired

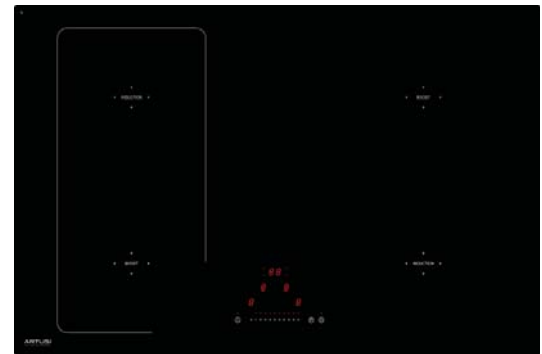


TECHNICAL INFORMATION

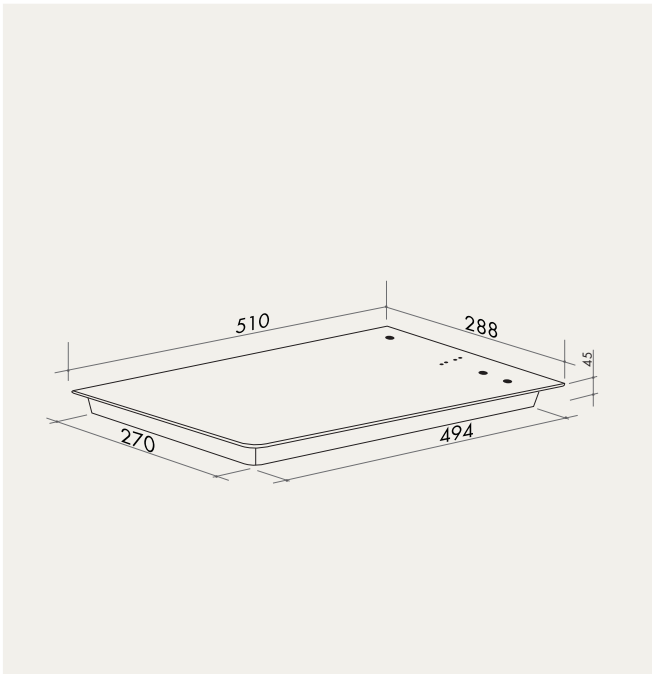

AGH30XFFD

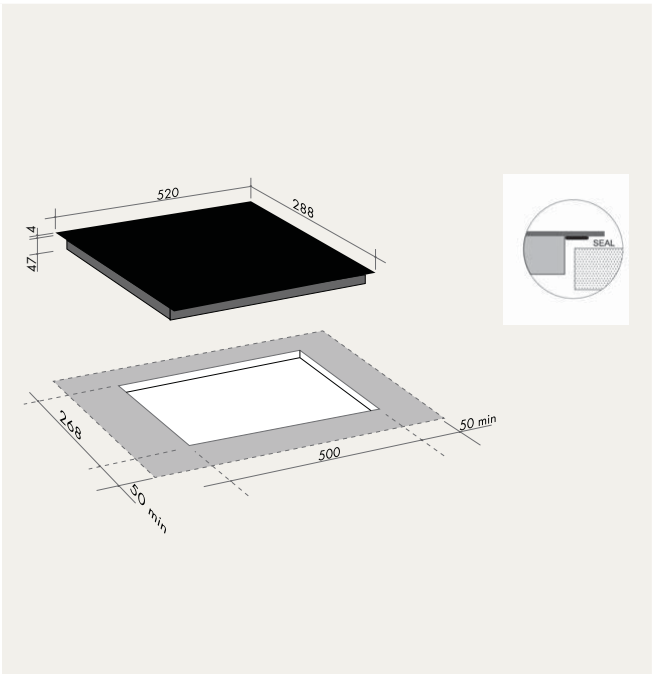


CACC30

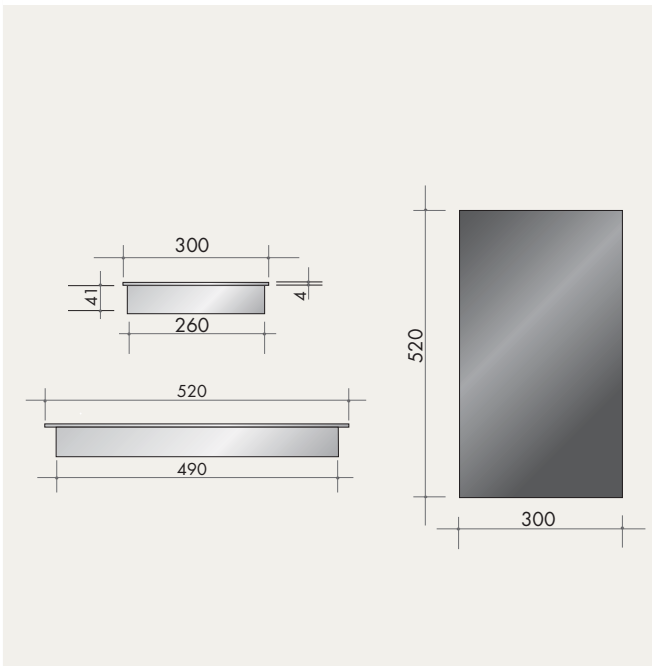


AID30


PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

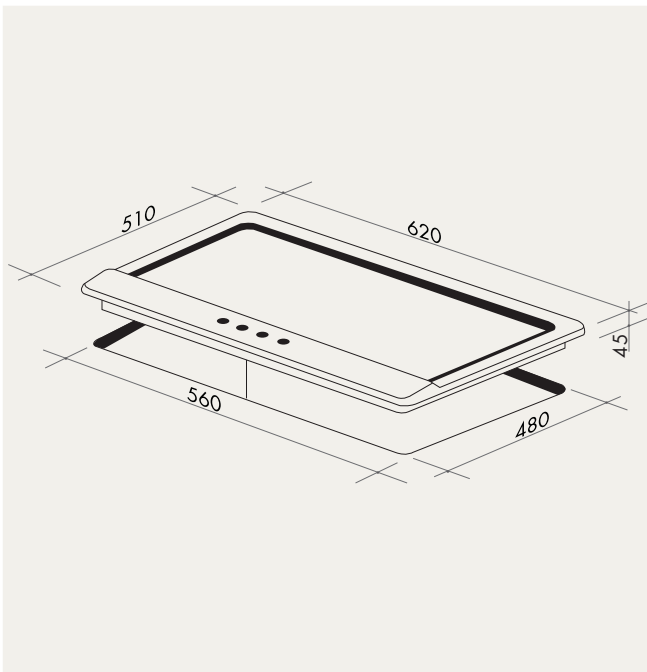

AGH64X | AGH65X

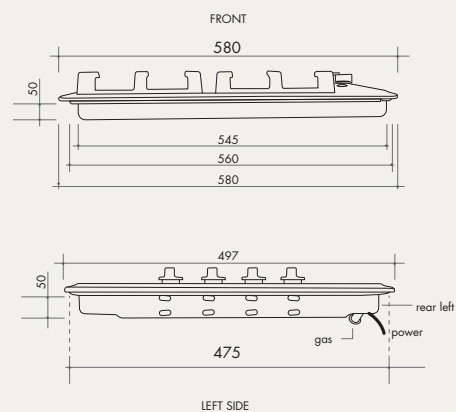

CAG640X | CAG640XFFD

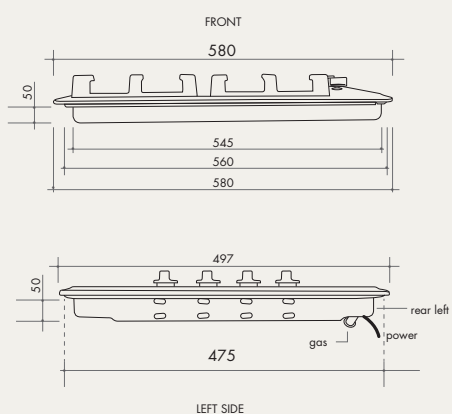


CAG640ETX | CAG640ETXFFD


PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.


TECHNICAL INFORMATION

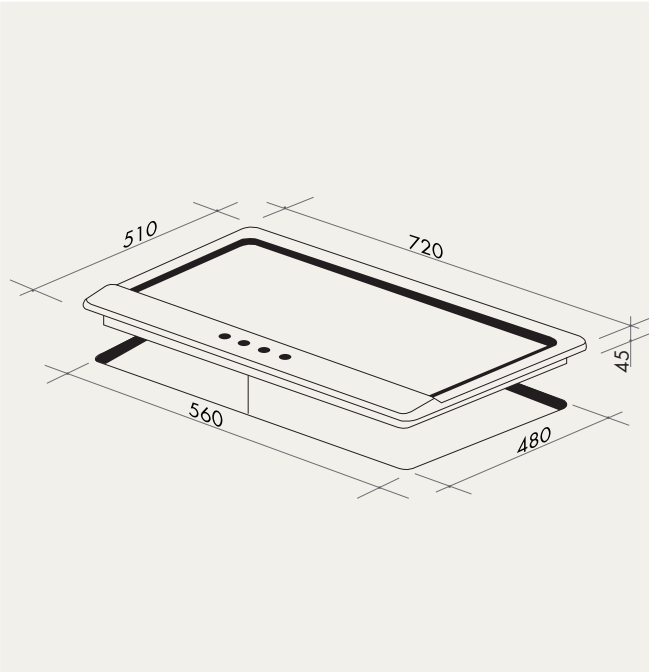

AGH70X | AGH71X
AGH70XFFD | AGH71XFFD

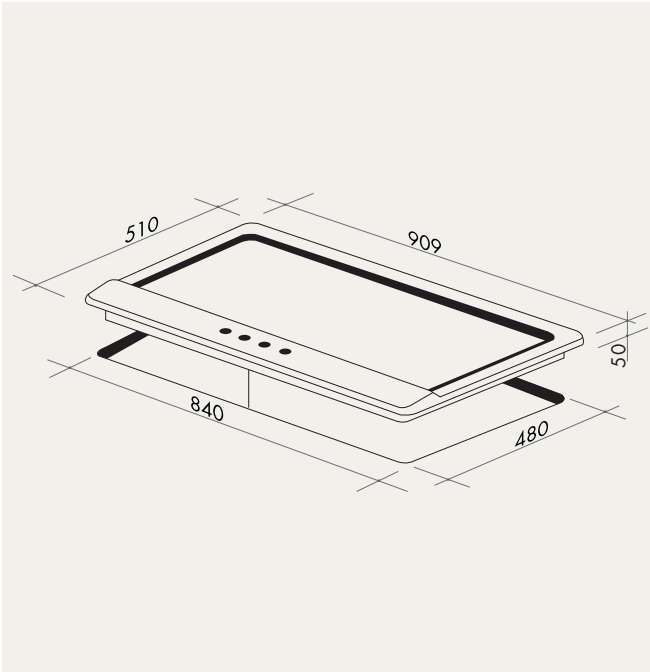


AGH90X | AGH91X
AGH90XFFD | AGH91XFFD

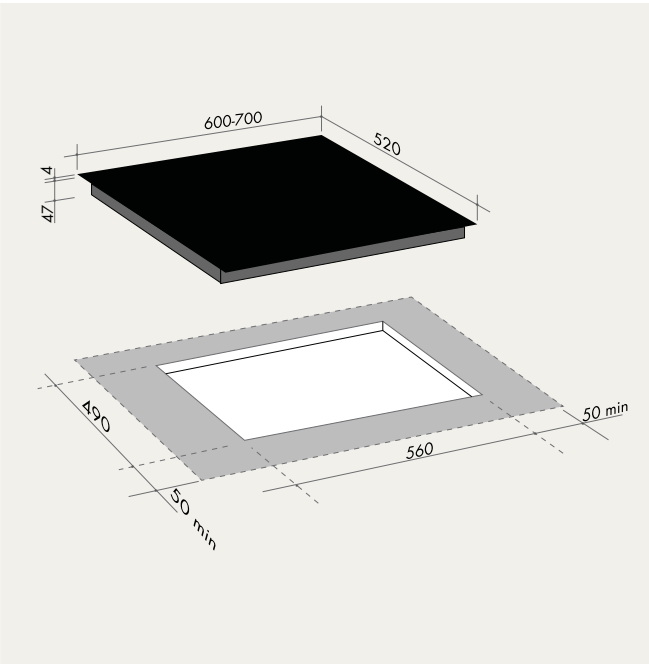


CACC604 | CACC704


PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

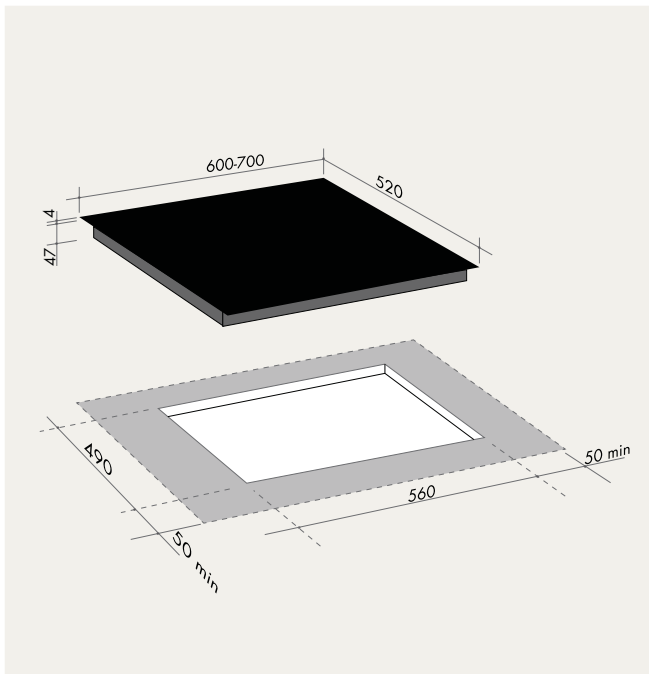

CACC60 | CACC70

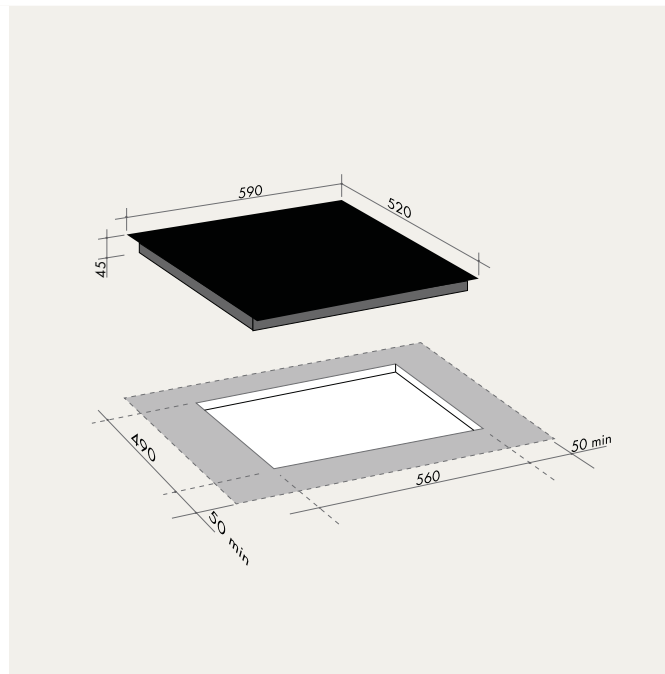

AID61 | AID63

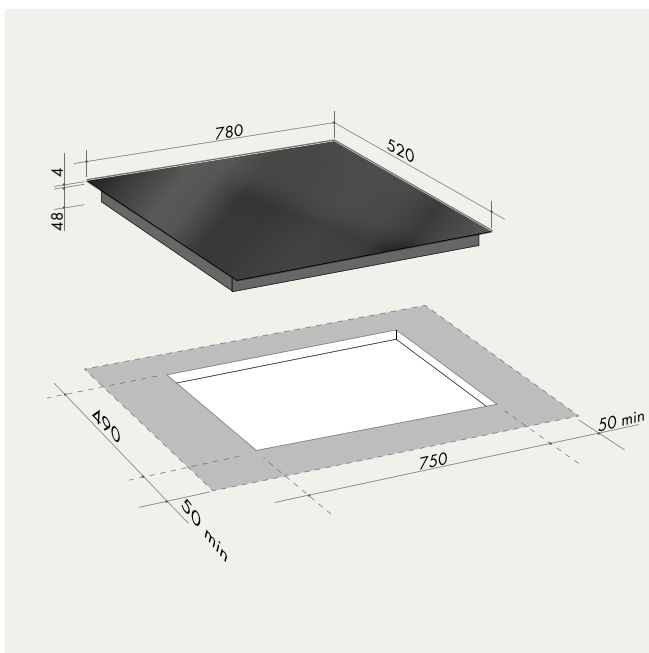

AID784



FREESTANDING COOKERS

AFG1206X
120cm freestanding cooker
double electric oven
6 gas burners, including wok + griddle

stainless steel
main oven capacity: 85 litres
auxiliary oven capacity: 35 litres

OVEN

- 8 functions (main)
- static/proofing (auxiliary)
- triple-glazed glass door
- easy-to-clean flat glass inner door
- fan forced
- electric grill
- removable oven cavity floor
- 3 cooking levels
- baking tray

HOB — 6 burners + griddle plate

	natural gas kW/hr
• 3 x semi-rapid	2.7
• 1 x auxiliary	2.6
• 1 x rapid	1.0
• 1 x triple-crown wok	3.7
<ul style="list-style-type: none"> • cast-iron griddle • cast-iron trivets and burner caps • cast-iron wok cradle • flame failure device fitted to each burner • automatic electronic ignition 	

- i** For technical diagrams please refer to page 52–55
total gas consumption: 15.4 kW/h
total electrical consumption: 3.6 kW/h
electrical connection: hard wired



FREESTANDING COOKERS

AFG940X
90cm freestanding cooker
electric oven, 5 gas burners, including wok

stainless steel
oven capacity: 105 litres



OVEN

- 4 functions
- stop-cook timer
- triple-glazed glass door
- fan forced
- electric grill
- oven light
- removable oven cavity floor
- 3 cooking levels
- baking tray
- adjustable legs

HOB — 5 burners

	natural gas
	kW/hr
• 2 x semi-rapid	2.6
• 1 x auxiliary	1.1
• 1 x rapid	2.7
• 1 x triple-crown wok	4.2
• cast-iron trivets and burner caps	
• cast-iron wok cradle	
• flame failure device fitted to each burner	
• automatic electronic ignition	

- i** For technical diagrams please refer to page 52–55
total gas consumption: 13.2 kW/hr
total electrical consumption: 3.6 kW/h
electrical connection: hard wired



AFG900X

90cm freestanding cooker
electric oven, 5 gas burners, including wok

stainless steel
oven capacity: 121 litres

OVEN

- 8 functions — light, defrost, top and bottom element, fan assisted, fan forced, bakers function, fan grill, static grill
- triple-glazed glass door
- easy-to-clean flat glass inner door
- fan forced
- electric grill
- removable oven cavity floor
- 5 cooking levels
- baking tray

HOB — 5 burners

- | | natural gas
kW/hr |
|------------------------|----------------------|
| • 2 x semi-rapid | 2.6 |
| • 1 x auxiliary | 1.1 |
| • 1 x rapid | 2.7 |
| • 1 x triple-crown wok | 4.2 |
- cast-iron trivets and burner caps
 - flame failure device fitted to each burner
 - automatic electronic ignition

- ❗ For technical diagrams please refer to page 52–55
- total gas consumption: 10.6 kW/hr
total electrical consumption: 3.6 kW/h
electrical connection: hard wired





FREESTANDING COOKERS

AFG911X | AFG911B | AFG911W
90cm freestanding cooker
electric oven, 5 gas burners, including wok

stainless steel | matt black | gloss white
oven capacity: 121 litres


OVEN

- 8 functions — light, defrost, top and bottom element, fan assisted, fan forced, bakers function, fan grill, static grill
- triple-glazed glass door
- easy-to-clean flat glass inner door
- fan forced
- electric grill
- removable oven cavity floor
- 5 cooking levels
- baking tray + 3 wire oven racks
- removable feet
- drop-down storage compartment

HOB — 5 burners

- | | natural gas
kW/hr |
|------------------------|----------------------|
| • 2 x semi-rapid | 2.6 |
| • 1 x auxiliary | 1.1 |
| • 1 x rapid | 2.7 |
| • 1 x triple-crown wok | 4.2 |
- cast-iron trivets and burner caps
 - cast-iron wok cradle
 - automatic electronic ignition
 - left-side WOK placement
 - single-piece pressed hob for easy cleaning
 - deep pressed hob

- i** For technical diagrams please refer to page 52–55
total gas consumption: 13.2 kW/hr
total electrical consumption: 3.6 kW/h
electrical connection: hard wired

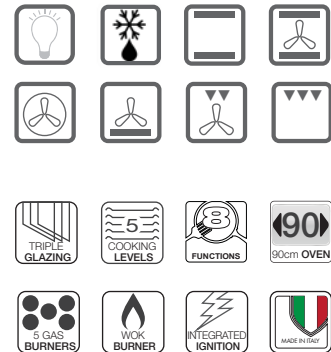



Model: AFG911B



Model: AFG911W



FREESTANDING COOKERS



CAFG90X
90cm freestanding cooker
electric oven, 5-gas burner hob
stainless steel
oven capacity: 104 litres


OVEN

- 9 functions — top and bottom element, defrost, fan assisted, fan forced, fan grill, grill, rotisserie, base heat, light
- double cavity cooking fan
- 50–250°C thermostat
- triple-glazed glass door
- electric grill + rotisserie
- oven light
- removable oven cavity floor
- 4 cooking levels
- baking tray + 2 wire oven racks
- adjustable legs
- warming compartment

HOB — 5 burners

- 1 triple ring 3.6 kW/hr
- 1 rapid burner 3.0 kW/hr
- 2 semi-rapid 1.75 kW/hr
- 1 auxiliary 1.0 kW/hr
- cast-iron trivets and burner caps
- flame failure device fitted to each burner
- automatic ignition
- single-piece pressed hob

i total gas consumption: 11.1 kW/hr
total electrical consumption: 2.94kW/h
electrical connection: 15AMP hard wired

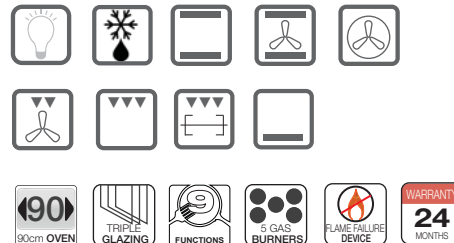

also available in stainless steel CAFG91X

CAFG91B
90cm freestanding cooker
electric oven, 5-gas burner hob
gloss black
oven capacity: 104 litres

OVEN

- 9 functions — top and bottom element, defrost, fan assisted, fan forced, fan grill, grill, rotisserie, base heat
- double cavity cooking fan
- 50–250°C thermostat
- digital clock
- triple-glazed glass door
- electric grill + rotisserie
- oven light
- removable oven cavity floor
- 4 cooking levels
- baking tray + 2 wire oven racks
- adjustable legs
- warming compartment

HOB — 5 burners

- 1 triple ring 3.6 kW/hr
- 1 rapid burner 3.0 kW/hr
- 2 semi-rapid 1.75 kW/hr
- 1 auxiliary 1.0 kW/hr
- cast-iron trivets and burner caps
- flame failure device fitted to each burner
- automatic ignition
- single-piece pressed hob

i total gas consumption: 11.1 kW/hr
total electrical consumption: 2.94kW/h
electrical connection: 15AMP hard wired



CAFC95X 90cm freestanding cooker electric oven, 5-zone ceramic hob

stainless steel

oven capacity: 104 litres

OVEN

- 9 functions — top and bottom element, defrost, fan assisted, fan forced, fan grill, grill, rotisserie, base heat
- double cavity cooking fan
- 50–250°C thermostat
- digital clock
- triple-glazed glass door
- electric grill + rotisserie
- oven light
- removable oven cavity floor
- 4 cooking levels
- baking tray + 2 wire oven racks
- adjustable legs
- warming compartment

HOB — 5 zones + 2 extension zones

- 1 x 1.0/2.2 kW/hr
- 1 x 1.2 kW/hr
- 2 x 1.8 kW/hr
- 1 x 1.1/2.0 kW/hr
- Ceran glass surface
- easy-clean hob
- residual heat indicator
- stainless steel trim

i grill heat power 2.0 kW
total main power: 11.94 kW

For technical diagrams on CAF model cookers, please refer to page 52–55

FREESTANDING COOKERS

AFG700X

70cm freestanding cooker

electric oven, 5 gas burners, including wok

stainless steel

oven capacity: 60 litres

OVEN

- 8 functions — light, defrost, top and bottom element, fan assisted, fan forced, bakers function, fan grill, static grill
- programmable oven timer and stop/start setting
- triple-glazed glass door
- easy-to-clean flat glass inner door
- fan forced
- electric grill
- removable oven cavity floor
- 4 cooking levels
- baking tray + 2 wire oven racks
- adjustable leg height

HOB — 5 burners

- | | natural gas
kW/hr |
|------------------------|----------------------|
| • 2 x semi-rapid | 2.0 |
| • 1 x auxiliary | 1.1 |
| • 1 x rapid | 2.7 |
| • 1 x triple-crown wok | 3.05 |
- cast-iron trivets and burner caps
 - flame failure device fitted to each burner
 - automatic electronic ignition
 - single-piece pressed hob

- i** For technical diagrams please refer to page 52–55
- total gas consumption: 9.5 kW/hr
- total electrical rating: 2.06 kW/h
- electrical connection: hard wired



AFGG701X

70cm freestanding cooker

gas oven, 5 gas burners, including wok

stainless steel
oven capacity: 60 litres



OVEN

- 5 functions — light/defrost (fan) activated by a specific knob, gas burner, gas burner+fan, grill, fan grill
- digital touch-control timer
- triple-glazed glass door
- electric grill
- 4x cooking levels
- 1x enamel drip tray
- 2x chrome wire shelves
- 1x trivet and handle for tray
- adjustable leg height

HOB — 5 burners

- | | natural gas
kW/hr |
|------------------|----------------------|
| • 2 x semi-rapid | 1.8 |
| • 1 x auxiliary | 1.0 |
| • 1 x rapid | 3.0 |
| • 1 x wok | 3.8 |
- cast-iron trivets and burner caps
 - flame failure device fitted to each burner
 - automatic electronic ignition
 - single-piece pressed job

- i** For technical diagrams please refer to page 52–55
- total gas power: 2.5 kWh (oven)
- total gas power: 11.4 kWh (hob)
- total electrical power: 1.86 kWh
- electrical connection: cable & plug



FREESTANDING COOKERS



AFG664X Flame Failure safety cutout
60cm freestanding cooker
electric oven
4 gas burners, including wok

stainless steel
oven capacity: 60 litres

OVEN

- 8 functions — light, defrost, static, fan assisted, fan forced, fan grill, static grill, bottom element + fan
- programmable oven timer and stop/start setting
- double-glazed glass door
- fan forced
- electric grill
- removable oven cavity floor
- 5 cooking levels
- chrome shelf
- baking tray
- adjustable leg height

HOB — 5 burners

- | | natural gas |
|------------------------|-------------|
| | kW/hr |
| • 2 x semi-rapid | 2.0 |
| • 1 x auxiliary | 1.06 |
| • 1 x triple-crown wok | 3.19 |
- cast-iron trivets and burner caps
 - flame failure device fitted to each burner
 - automatic electronic ignition
 - single-piece pressed hob

i For technical diagrams please refer to page 52–55
total gas consumption: 817/8.25 kW/hr
total electrical rating: 2.1 kW/h
10 AMP flex and lead supplied





AFE504W
50cm freestanding cooker
electric oven, 4 heat plates

white enamel
oven capacity: 65 litres gross



AFE544W
54cm freestanding cooker
electric oven, 4 heat plates

white enamel
oven capacity: 65 litres gross

OVEN

- 4 functions — light, bottom element, top and bottom element, grill
- 5 shelf heights
- single light
- thermostat 50–250°C
- removable door, double glazing
- adjustable feet
- standard inclusions:
- baking tray, 2 x grill rack, chrome side rack supports, heat-resistant tray handles

OVEN

- 4 functions — light, bottom element, top and bottom element, grill + light
- 5 shelf heights
- digital timer
- thermostat 50–250°C
- removable door, double glazing
- adjustable feet
- standard inclusions:
- baking tray, 2 x grill rack, chrome side rack supports, heat-resistant tray handles

HOB

- four EGO plates —
- 2 x 145mm diameter, 1.0kW
 - 1 x 180mm diameter, 1.5kW
 - 1 x 180mm diameter, 2.0kW

HOB

- four EGO plates —
- 2 x 145mm diameter, 1.0kW
 - 1 x 180mm diameter, 1.5kW
 - 1 x 180mm diameter, 2.0kW

i For technical diagrams please refer to page 52–55
hard wired (no cable supplied)
total main power 7.5 kW

i For technical diagrams please refer to page 52–55
hard wired (no cable supplied)
total main power 7.5 kW

FREESTANDING COOKERS



AFE547W
54cm freestanding cooker
electric oven, 4 heat plates

white enamel
oven capacity: 65 litres gross

OVEN

- 7 cooking functions — Classic (lower+upper+light), grill, base heat, half fan grill, fan forced, fan assisted, defrost
- digital timer
- 5 shelf heights
- single light
- thermostat 50–250°C
- removable door, double glazing
- adjustable feet
- double-glass removable door
- storage drawer
- standard inclusions: baking tray, 2 X wire shelves, chrome side rack supports, heat-resistant tongs

HOB

four EGO plates —

- 2 x 145mm diameter, 1.0kW
- 1 x 180mm diameter, 1.5kW
- 1 x 180mm diameter, 2.0kW

i For technical diagrams please refer to page 52–55
hard wired (no cable supplied)
total main power 7.5 kW



AFC547W
54cm freestanding cooker
electric oven, 4-zone ceramic hob

white enamel
oven capacity: 56 litres gross
grill capacity: 25 litres gross

OVEN

- 7 functions — upper+lower heat (conventional cooking), electric grill, base heat, fan grill, fan assisted, fan+base heat, fan + light
- oven heat indicator
- 5 shelf heights (oven)
- 2 shelf heights (grill)
- thermostat 50–250°C
- triple glazing, removable door
- adjustable feet
- standard inclusions: baking tray, 2x chrome-wire shelves, chrome side rack supports, heat-resistant tray handles

HOB

four heat zones —

- 2 x 145mm diameter, 1.2 kW each
- 2 x 180mm diameter, 1.8kW

i For technical diagrams please refer to page 52–55
grill heat power 1.1 kW
total main power: kW



AFGE5470W
54cm freestanding cooker
electric oven, 4 gas burners

white enamel
oven capacity: 65 litres gross

OVEN

- 7 cooking functions — Classic (lower+upper+light), grill, base heat, half fan grill, fan forced, fan assisted, defrost
- 5 shelf heights
- single light
- thermostat 50–250°C
- removable door, double glazing
- adjustable feet
- standard inclusions:
- baking tray, 2 x grill rack, chrome side rack supports, heat-resistant tray handles

HOB

- four gas burners —
- 2 x semi-rapid, 1.75 kW each
 - 1 x auxiliary, 1.0 kW
 - 1 x wok, 3.5 kW

i For technical diagrams please refer to page 52–55
hard wired (no cable supplied)
total main power 7.5 kW



AFGE5470X
54cm freestanding cooker
electric oven, 4 gas burners

stainless steel
oven capacity: 65 litres gross

OVEN

- 7 cooking functions — Classic (lower+upper+light), grill, base heat, half fan grill, fan forced, fan assisted, defrost
- 5 shelf heights
- single light
- thermostat 50–250°C
- removable door, double glazing
- adjustable feet
- standard inclusions:
- baking tray, 2 x grill rack, chrome side rack supports, heat-resistant tray handles

HOB

- four gas burners —
- 2 x semi-rapid, 1.75 kW each
 - 1 x auxiliary, 1.0 kW
 - 1 x wok, 3.5 kW

i For technical diagrams please refer to page 52–55
hard wired (no cable supplied)
total main power 7.5 kW

FREESTANDING COOKERS



AFDE5470W
54cm freestanding cooker
electric oven, 4 heat plates

white enamel
oven capacity: 56 litres gross
grill capacity: 25 litres gross

OVEN

- 7 functions — upper+lower heat (conventional cooking), electric grill, base heat, fan grill, fan assisted, fan+base heat, fan + light
- oven heat indicator
- 5 shelf heights (oven) | 2 shelf heights (grill)
- thermostat 50–250°C
- triple glazing, removable door
- adjustable feet
- standard inclusions:
- baking tray, 2x chrome-wire shelves, chrome side rack supports, heat-resistant tray handles

HOB

four EGO plates —

- 2 x 145mm diameter, 1.0kW
- 1 x 180mm diameter, 1.5kW
- 1 x 180mm diameter, 2.0kW

i For technical diagrams please refer to page 52–55
grill heat power 2.0 kW
total main power: 10 kW



AFDC5470W
54cm freestanding cooker
electric oven, 4-zone ceramic hob

white enamel
oven capacity: 56 litres gross
grill capacity: 25 litres gross

OVEN

- 7 functions — upper+lower heat (conventional cooking), electric grill, base heat, fan grill, fan assisted, fan+base heat, fan + light
- oven heat indicator
- 5 shelf heights (oven)
- 2 shelf heights (grill)
- thermostat 50–250°C
- triple glazing, removable door
- adjustable feet
- standard inclusions:
- baking tray, 2x chrome-wire shelves, chrome side rack supports, heat-resistant tray handles

HOB

four heat zones —

- 2 x 145mm diameter, 1.2 kW each
- 2 x 180mm diameter, 1.8kW

i For technical diagrams please refer to page 52–55
grill heat power 2.0 kW
total main power: 10 kW



AFE607W
60cm freestanding cooker
electric oven, 4 heat plates

white enamel
oven capacity: 65 litres gross

OVEN

- 7 cooking functions — Classic (lower+upper+light), grill, base heat, half fan grill, fan forced, fan assisted, defrost
- digital timer
- 5 shelf heights
- single light
- thermostat 50–250°C
- removable door, double glazing
- adjustable feet
- double-glass removable door
- storage drawer
- standard inclusions:
- baking tray, 2 x wire shelves, chrome side rack supports, heat-resistant tongs

HOB

four EGO plates —

- 2 x 145mm diameter, 1.0kW
- 1 x 180mm diameter, 1.5kW
- 1 x 180mm diameter, 2.0kW

i 600Wx600Dx900H
hard wired (no cable supplied)
total main power 7.5 kW



AFGE6070W
60cm freestanding cooker
electric oven, 4 gas burners

white enamel
oven capacity: 65 litres gross

OVEN

- 7 cooking functions — Classic (lower+upper+light), grill, base heat, half fan grill, fan forced, fan assisted, defrost
- digital timer
- 5 shelf heights
- single light
- thermostat 50–250°C
- removable door, double glazing
- adjustable feet
- double-glass removable door
- storage drawer
- standard inclusions:
- baking tray, 2 x wire shelves, chrome side rack supports, heat-resistant tongs

HOB

four gas burners —

- 2 x semi-rapid, 1.75 kW each
- 1 x auxiliary, 1.0 kW
- 1 x wok, 3.5 kW

i 600Wx600Dx900H
hard wired (no cable supplied)
total gas consumption 9.25 kW

FREESTANDING COOKERS



AFC607X | AFC607W 60cm freestanding cooker electric oven, 4 heat zones

stainless steel, brilliant white
oven capacity: 56 litres gross

OVEN

- 7 functions — upper+lower heat (conventional cooking), electric grill, base heat, fan grill, fan assisted, fan+base heat, fan + light
- oven heat indicator
- 5 shelf heights (oven) | 2 shelf heights (grill)
- thermostat 50–250°C
- double glazing, removable door
- adjustable feet
- standard inclusions:
- baking tray, 2x chrome-wire shelves, chrome side rack supports, heat-resistant tray handles

HOB


four heat zones —

- 2 x 145mm diameter, 1.2 kW each
- 2 x 180mm diameter, 1.8kW


i For technical diagrams please refer to page 52–55
total electrical consumption 8.0 kW




TECHNICAL INFORMATION

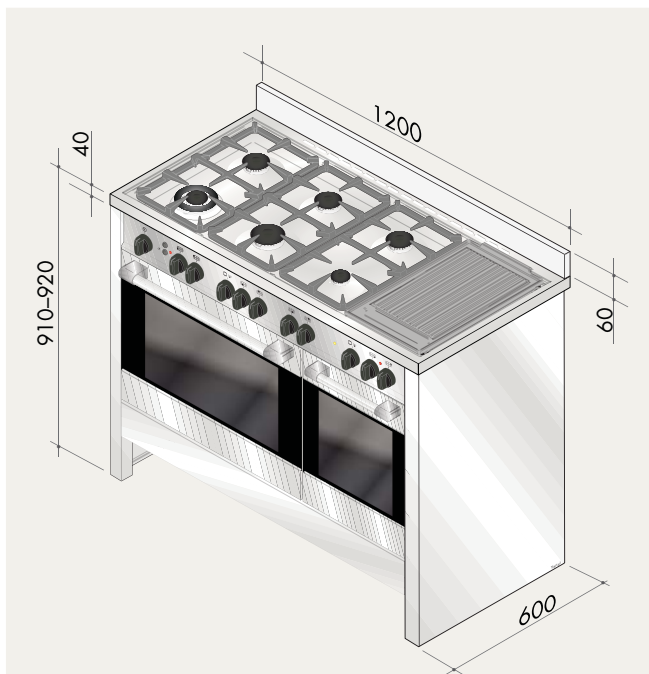


AFG1206X

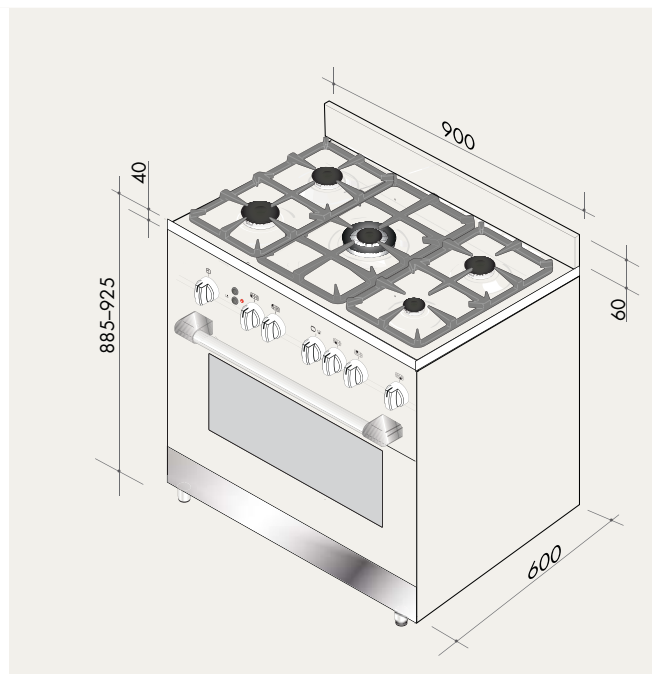

AFG940X

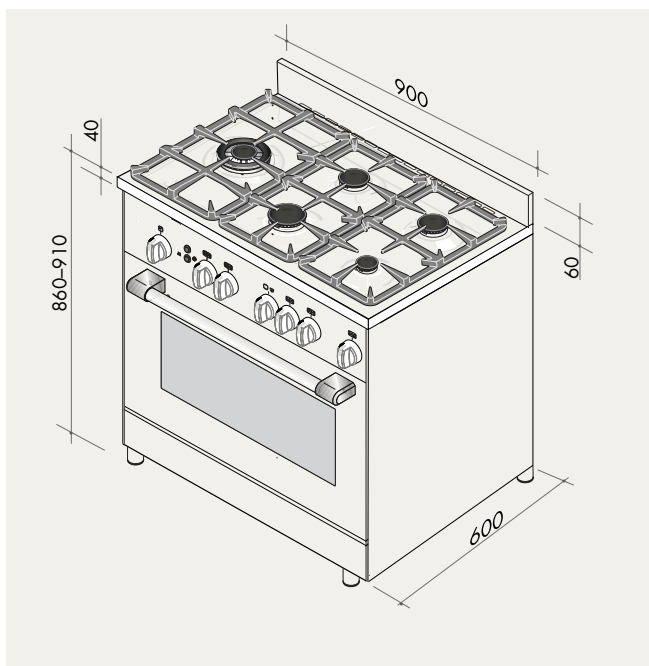


AFG911

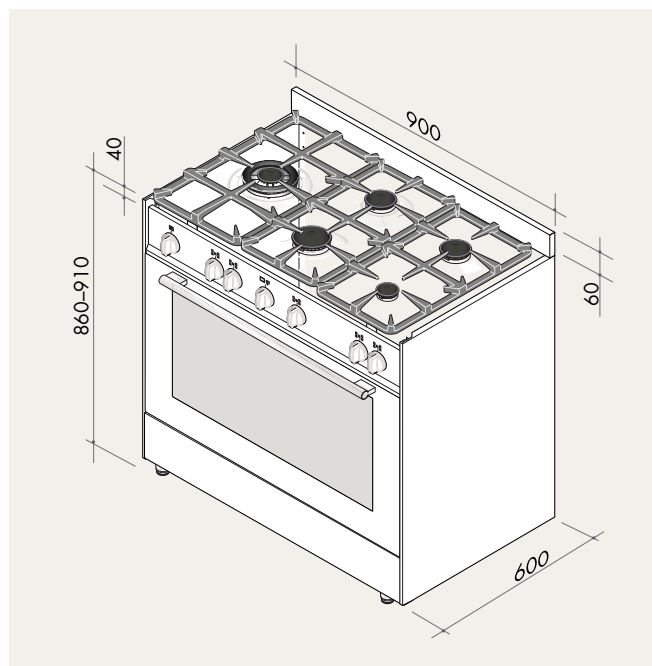


AFG900X

PLEASE NOTE:


All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

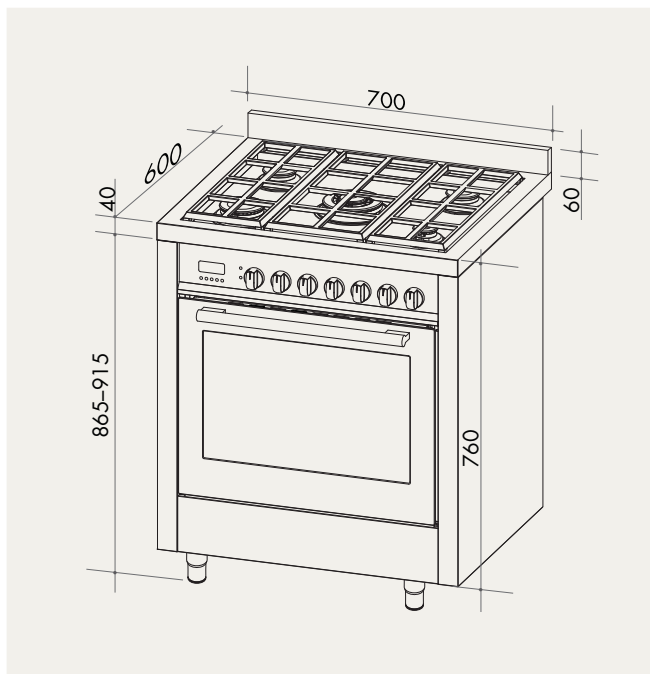


AFG700X

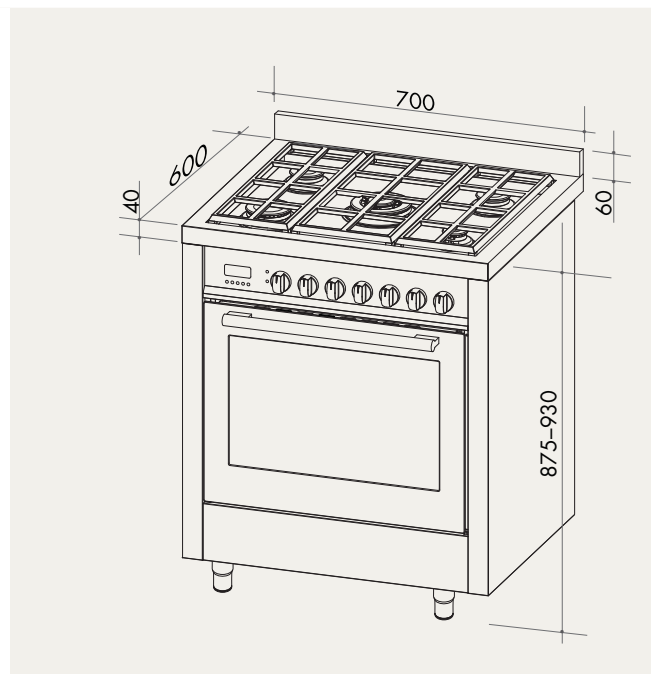

AFGG701X

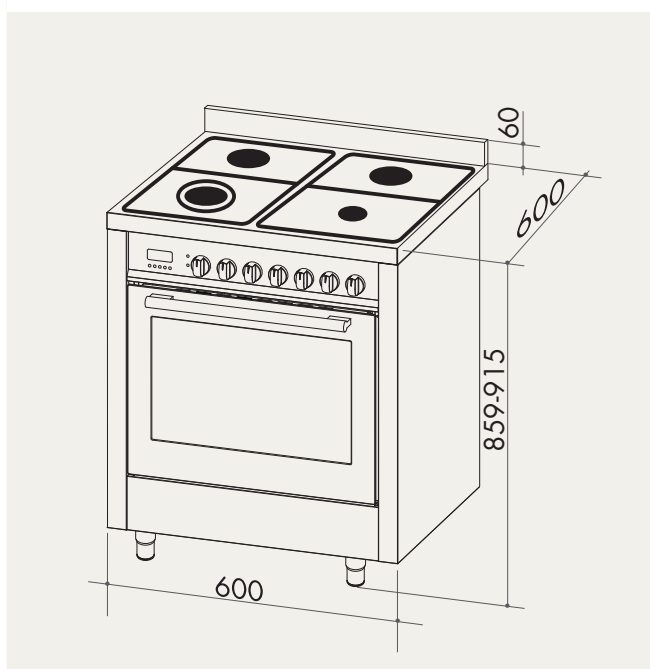

AFG664XFFD

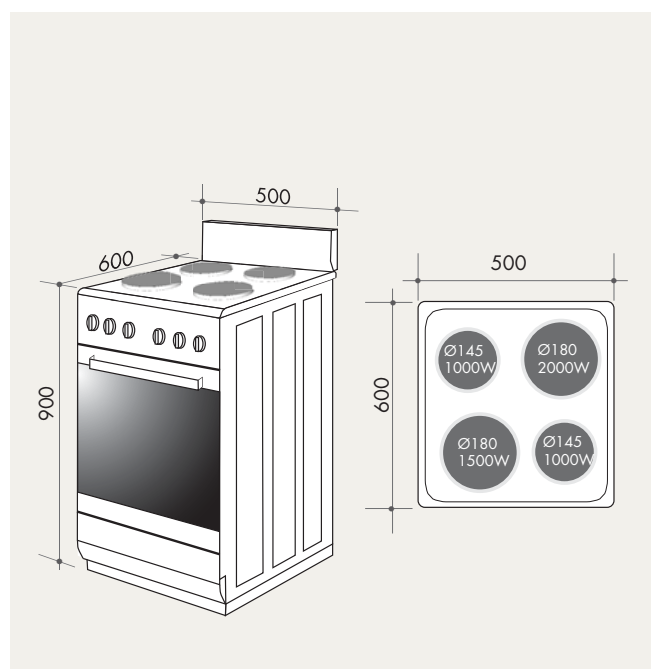


AFE504W


PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.


TECHNICAL INFORMATION

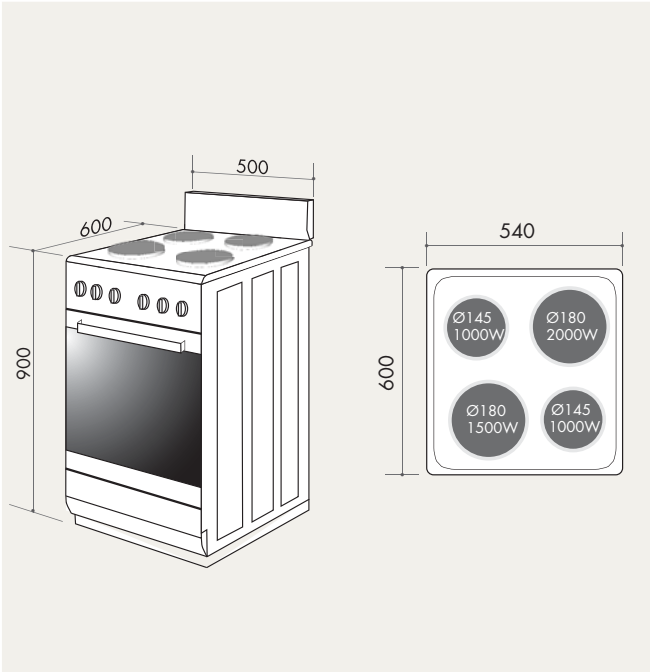


AFE504W

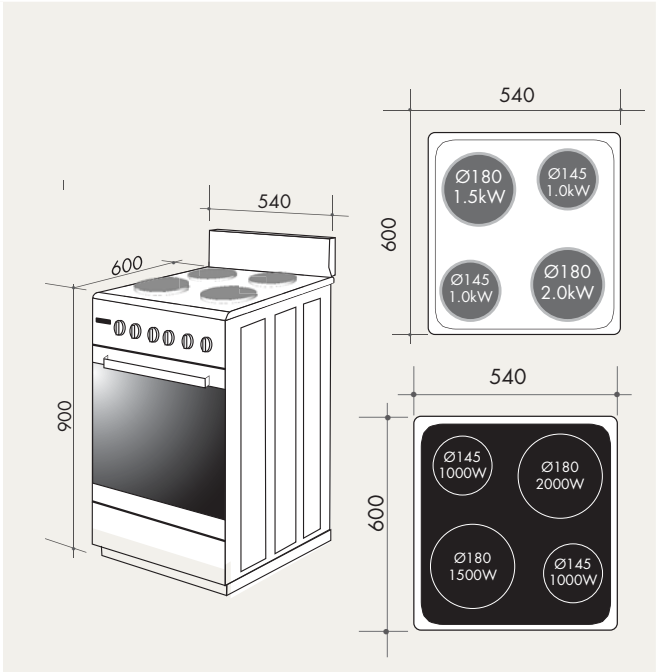

AFE544W | AFC547W

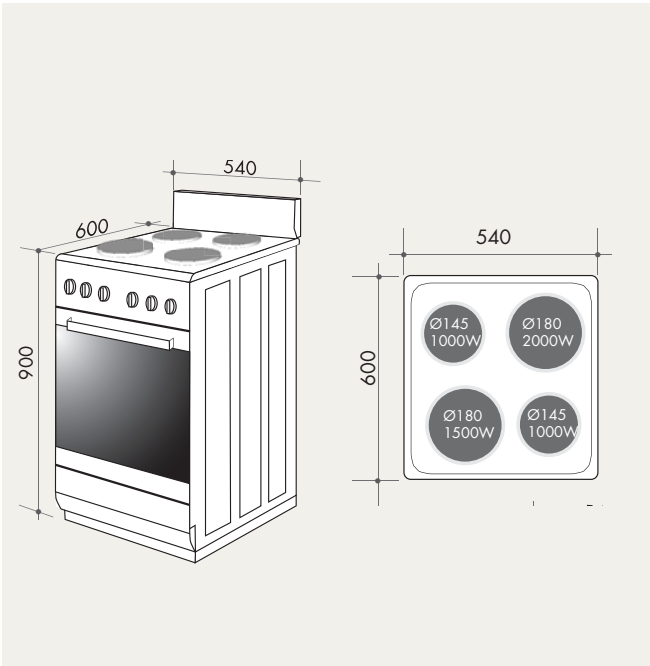


AFE547W

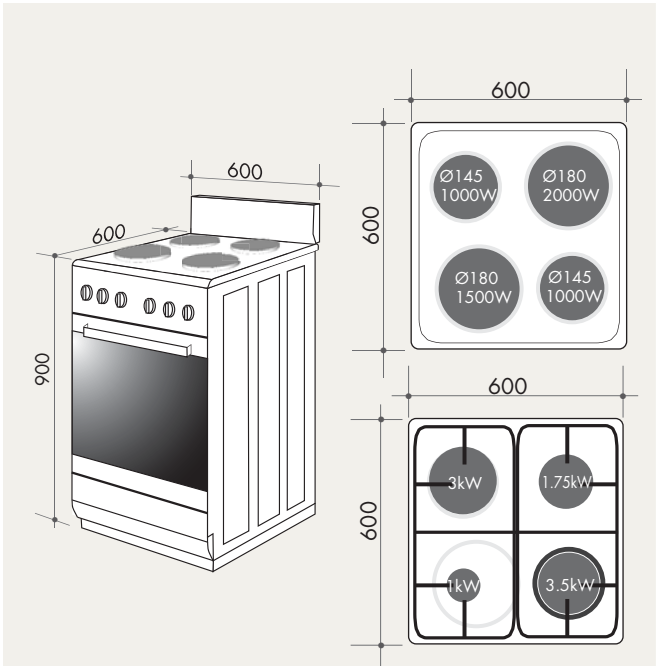


AFE607W | AFGE6070W

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

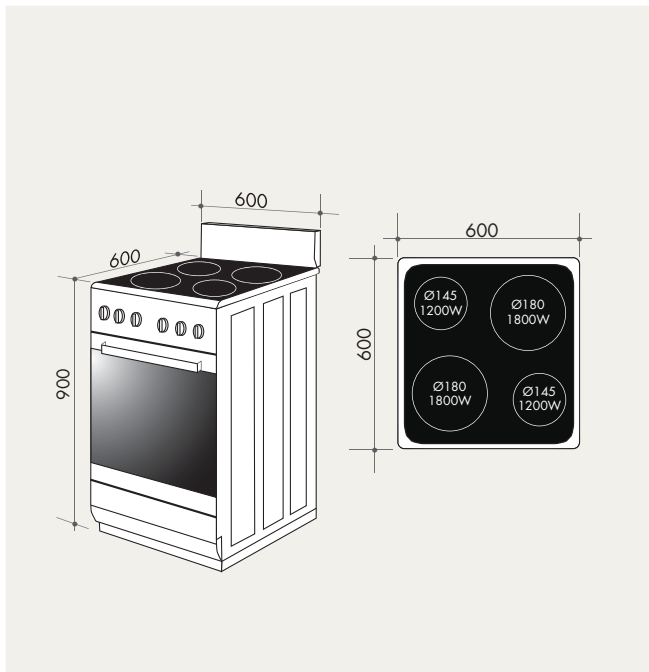

AFC607X | W | B

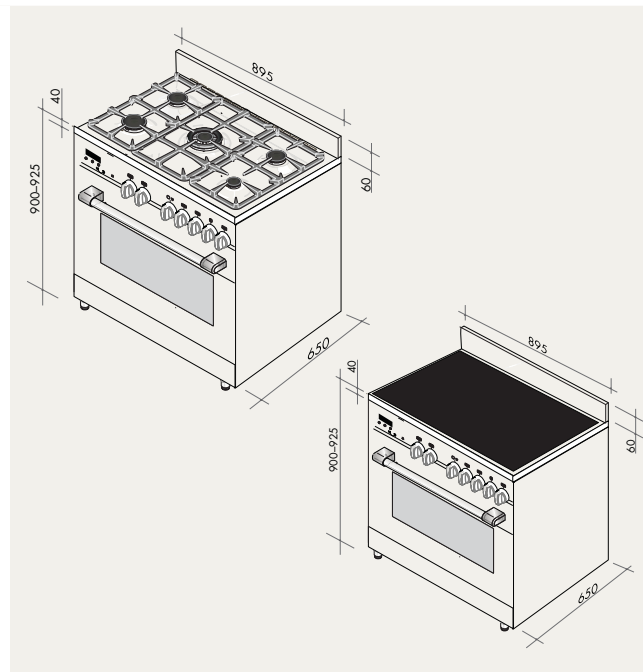

CAFG90X | CAFG91B | CAFC95X

PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

MICROWAVE OVENS

AMO31X microwave oven



- stainless steel exterior and interior
- 31 litres
- Easi-tronic operation
- push-button door
- power output 900W
- grill 1200W
- 2 grill levels
- 315mm tempered glass turntable
- 6 auto cook menus
- 5 power settings
- end-cooking signal
- child safety lock
- LED display
- ATK31X stainless steel trimkit for integration above oven

i For technical diagrams please refer to page 58
total electrical consumption: 0.9 kW/hr
10 Amp GPO, 3-pin plug and cord



AMC31X convection microwave oven



- stainless steel exterior and interior
- 31 litres
- Easi-tronic operation
- push-button door
- power output 900W
- grill 1200W
- convection 1350W
- 2 grill levels
- 315mm tempered glass turntable
- convection cooking function
- 6 auto cook menus
- 5 power settings
- end-cooking signal
- child safety lock
- LED display
- ATK31X stainless steel trimkit for integration above oven

i For technical diagrams please refer to page 58
total electrical consumption: 0.9 kW/hr
10 Amp GPO, 3-pin plug and cord



AMC34BI built-in convection microwave oven

- stainless steel exterior and interior
- 34 litres
- digital control
- push-open door
- 1000W microwave power
- 1100W grill
- 2400W convection
- LED cavity lighting
- white LCD display
- child safety lock
- 10 auto cooking menus
- built-in installation

i For technical diagrams please refer to page 58
10 Amp GPO, 3-pin plug and cord




AMO31TK microwave oven with integrated trimkit

- stainless steel exterior and interior
- 31 litres
- Easi-tronic operation
- push-button door
- power output 900W
- 315mm tempered glass turntable
- 6 auto cook menus
- 5 power settings
- end-cooking signal
- child safety lock
- LED display


i For technical diagrams please refer to page 58
rated input: 1.45 kWh
rated microwave output: 0.9 kW/hr
10 Amp GPO, 3-pin plug and cord




TECHNICAL INFORMATION

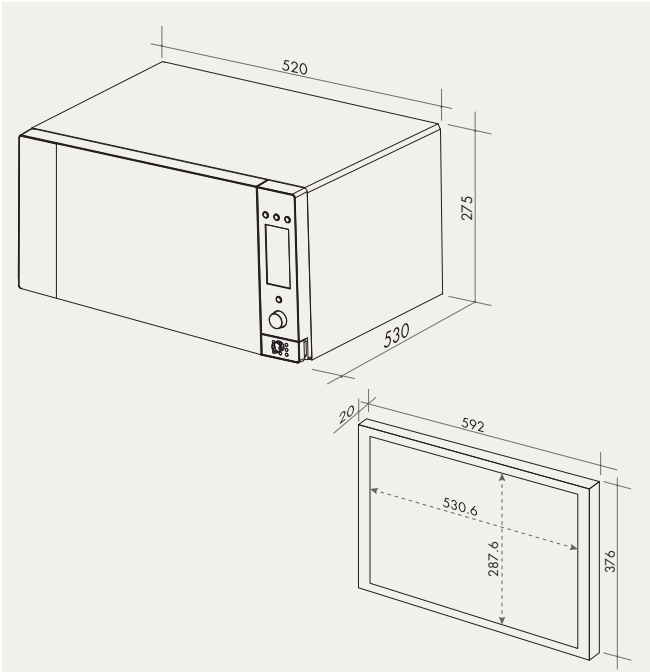


AMO31X | ATK31X

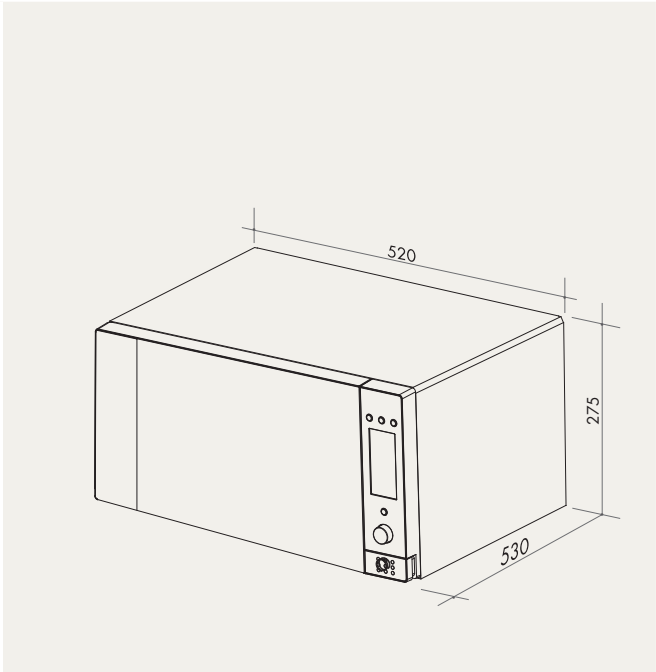

AMC31X

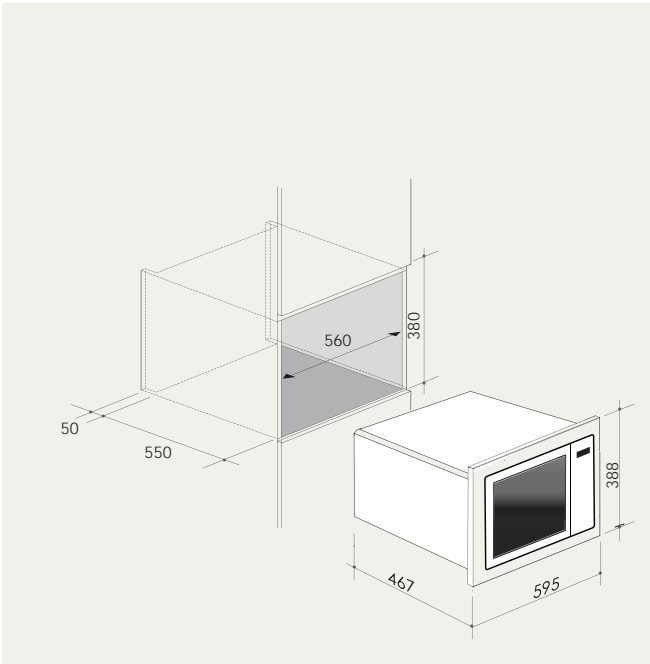

AMC34BI

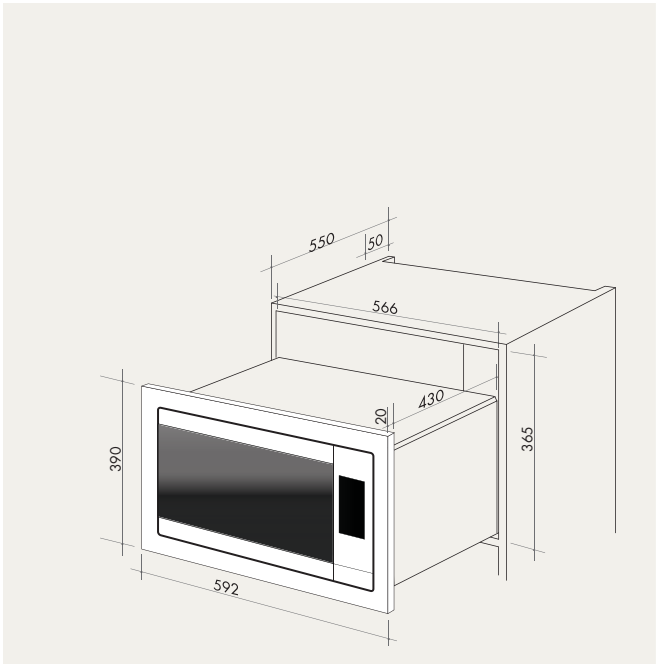

AMO31TK

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

MINI KITCHEN



AOMK1 freestanding mini kitchen

white enamel
oven capacity: 22 litres



OVEN

- 1000W grill
- control knob thermostat
- 50–250°C
- double-glazed vented glass door
- rear steam venting system

HOB

- two EGO plates —
- large, 1.2 kW
 - small, 1.0kW

❗ total electrical consumption 2.3 kW
10 AMP lead and plug

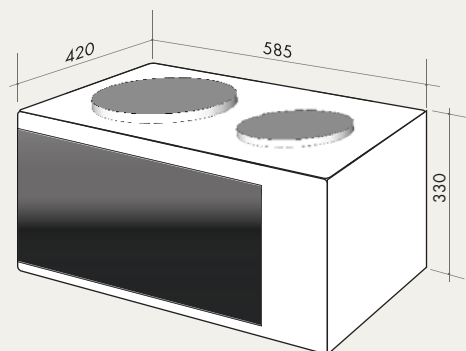

AOMK1

RANGEHOODS | CANOPY

ACH600X & ACH900X 60&90cm canopy wallmount rangehood

- stainless steel
- 2 x aluminium filters
- front push-button control
- 900m³/hr airflow
- 58 dBA
- 2 x 24W lightbulbs
- 3 speeds
- Ø150mm ducting | recirculation kit available
- 10 AMP electrical connection, 3-pin plug and cord

i For technical diagrams please refer to page 66–68
240W input power
160W maximum motor power



ACH905X 90cm canopy wallmount rangehood

- stainless steel
- aluminium filters
- 2 x charcoal filters
- front push-button control
- 760m³/hr airflow (maximum)
- 60 dBA
- 2 x 1.5W LED lights
- 3 speeds
- 150mm duct outlet


i For technical diagrams please refer to page 66–68
input power: 198W
maximum motor power: 195W
160cm power cord with standard 3-pin plug



ACG900X 90cm canopy wallmount rangehood



- AS304 stainless steel + glass
- modern curved glass design
- front button control
- 900m³/hr airflow
- 58 dBA
- 2 x LED lights
- 3 speeds
- Ø150mm ducting | recirculation kit available


 For technical diagrams please refer to page 66–68
10 AMP electrical connection, 3-pin plug and cord



ACH1200X 120cm canopy wallmount rangehood



- AS430 stainless steel
- wallmount
- front push-button operation
- 3 speeds
- 2 x 20W spotlights
- 125mm ducting
- 1000m³/hr (speed 3)
- 63.8 dBA maximum

 For technical diagrams please refer to page 66–68
10 AMP electrical connection, 3-pin plug and cord



RANGEHOODS | BARBECUE

ACH12BBQ 120cm barbecue rangehood



- stainless steel
- 2 x 1000m³/hr airflow
- dual motors with 3 powerful air extraction speeds
- full stainless steel construction
- installation kit provided
- removable stainless steel baffle filters designed for maximum performance and easy cleaning
- 6 x LED lights will perfectly illuminate the cooking area
- wallmount installation
- twin duct outlets (one for each motor) for maximum performance

❗ For technical diagrams please refer to page 66–68
motor: 2 x 218W



Minimise grease and smoke when cooking on your barbecue with the Artusi twin-motor rangehood. Twin turbo motors combined with a custom-designed ventilation system. Suitable for any size barbecue (up to 120cm wide).

RANGEHOODS | CONCEALED UNDERMOUNT

AUM51X 51cm concealed undermount rangehood



- AS430 fingerprint-proof stainless steel
- 645m³/hr airflow at maximum speed
- 45.5 dBA (minimum speed)
- 57 dBA (maximum speed)
- slider controls
- aluminium grease filter
- 2 x extraction levels
- 2 x 28W halogen lights
- duct outlet Ø120mm
- installation with outlet tube to the exterior/ recirculating
- easy installation system

i For technical diagrams please refer to page 66–68
10 AMP electrical connection, 3-pin plug and cord
100W maximum power consumption




AUM60 & AUM90 60 & 90cm concealed undermount rangehood



- AS430 fingerprint-proof stainless steel
- aluminium filters
- carbon filter included
- recirculation vent
- 3 speeds, push-button control
- 750m³/hr airflow
- 2 x 1.5W LED lights
- 39.5 dBA (power level 1)
- Ø150mm ducting

i For technical diagrams please refer to page 66–68
10 AMP electrical connection, 3-pin plug and cord
150W motor

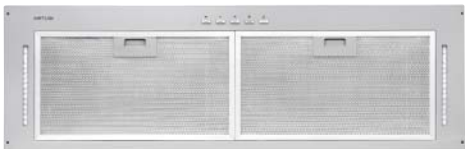

	AIRFLOW (m³/hr)	NOISE (dB)	PRESSURE (Pa)	POWER OUTLET (W)
LOW	308	39.5	242	90
MEDIUM	414	46.6	297	110
HIGH	619	56.5	380	189

RANGEHOODS | SLIDEOUT

ASO600RX & ASO900RX 60cm & 90cm slideout rangehood



- AS430 fingerprint-proof stainless steel
- 3x aluminium filters
- carbon filter included
- recirculation vent
- 3 speeds, slide control
- 270m³/hr airflow
- 2 x incandescent lightglobes
- 2 x front rails included (40mm | 68mm)
- Ø120mm ducting | recirculation kit available

i For technical diagrams please refer to page 66–68
10 AMP electrical connection, 3-pin plug and cord
input power: 120W



ASO601RX & ASO901RX 60cm & 90cm slideout rangehood (recirculated)



- stainless steel, white body
- aluminium mesh filter, dishwasher safe
- carbon filter included
- 3 speeds, slide control
- 350m³/hr airflow
- 2 x incandescent lightglobes
- 1 x front rail included
- Ø120mm ducting | recirculation kit available

i For technical diagrams please refer to page 66–68
10 AMP electrical connection, 3-pin plug and cord
input power: 120W



ASO620X & ASO920X 60cm & 90cm slideout rangehood



- stainless steel front rail
- 2x aluminium mesh filter, dishwasher safe
- 3 speeds, slide control
- 600m³/hr airflow
- 59–65 dBA (minimum — maximum)
- 1 x 40W incandescent lightglobe
- 1x 40mm front rail
- ducted only
- Ø120mm ducting

i For technical diagrams please refer to page 66–68
10 AMP electrical connection, 3-pin plug and cord
input power: 120W



RANGEHOODS | FIXED

AFR6X 60cm fixed rangehood



- AS430 fingerprint-proof stainless steel
- 3x aluminium filters
- carbon filter included
- recirculation vent
- 3 speeds, slide control
- 270m³/hr airflow
- 2 x incandescent lightglobes
- Ø120mm ducting | recirculation kit available

i For technical diagrams please refer to page 66–68
10 AMP electrical connection, 3-pin plug and cord
input power: 120W



AFR60S & AFR60W 60cm fixed rangehood




- silver glass | white glass
- 2x aluminium filters
- carbon filter included
- recirculation vent
- 3 speeds, slide control
- 270m³/hr airflow
- 2 x incandescent lightglobes
- Ø120mm ducting | recirculation kit available


i For technical diagrams please refer to page 66–68
10 AMP electrical connection, 3-pin plug and cord
input power: 120W




TECHNICAL INFORMATION

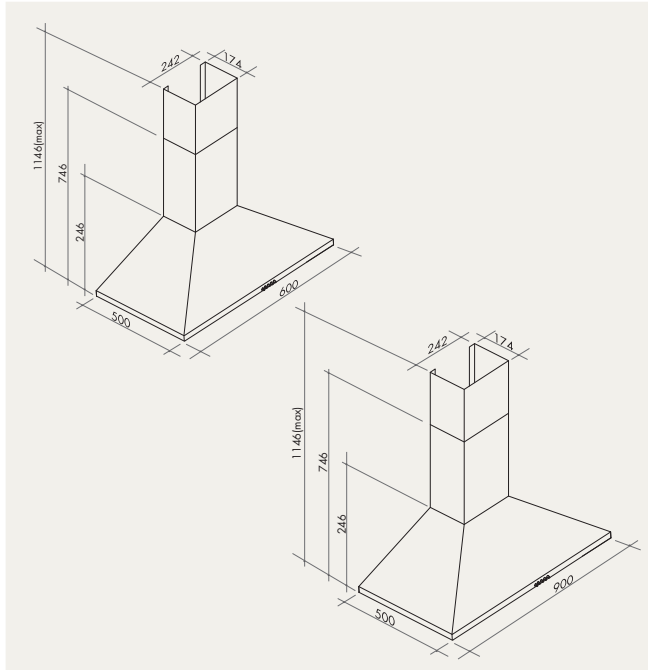


ACH600X | ACH900X

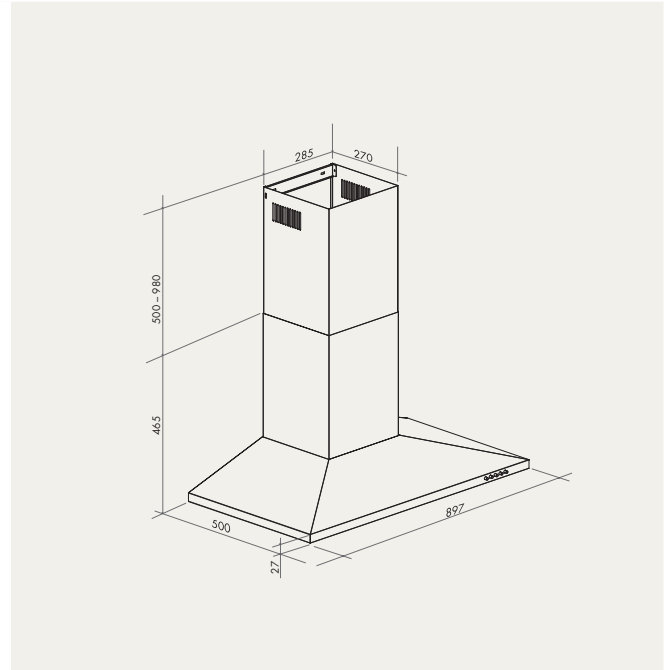

ACH905XX

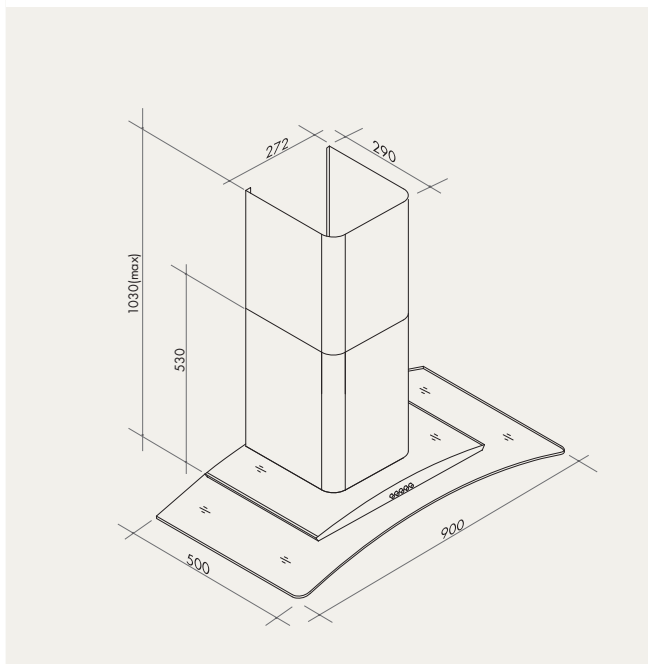


ACG900X

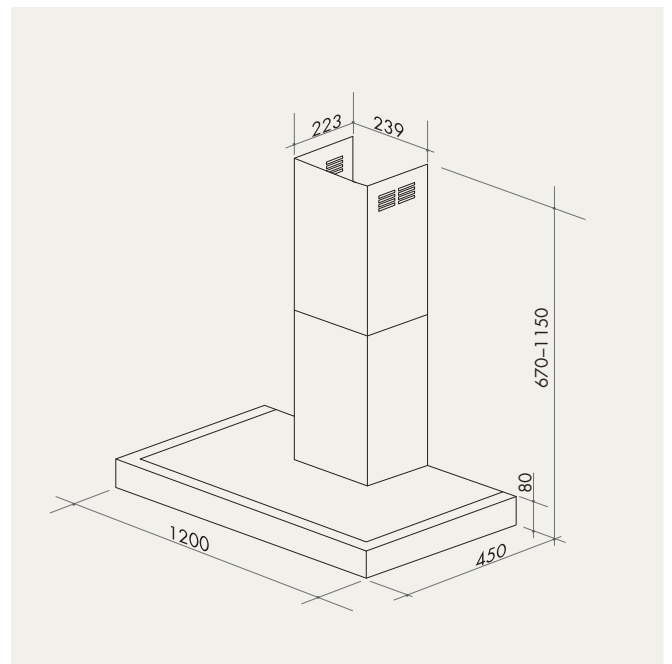


ACH1200X

PLEASE NOTE:


All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

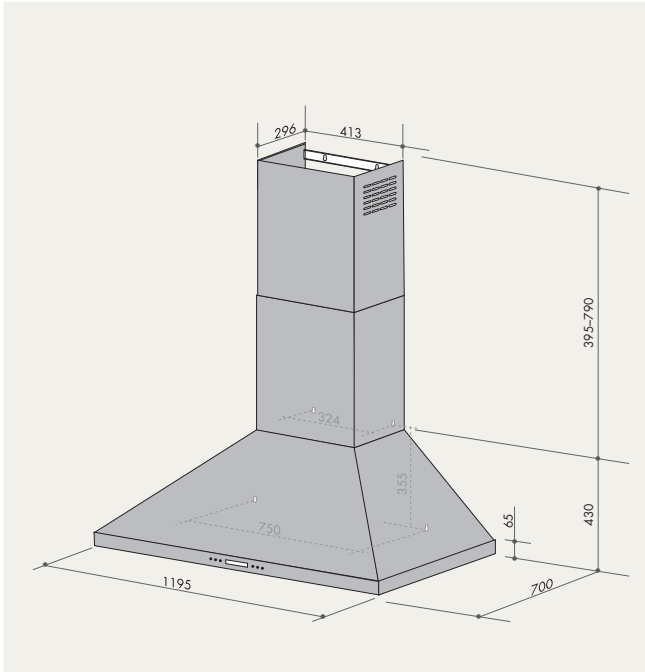


ACH12BBQ

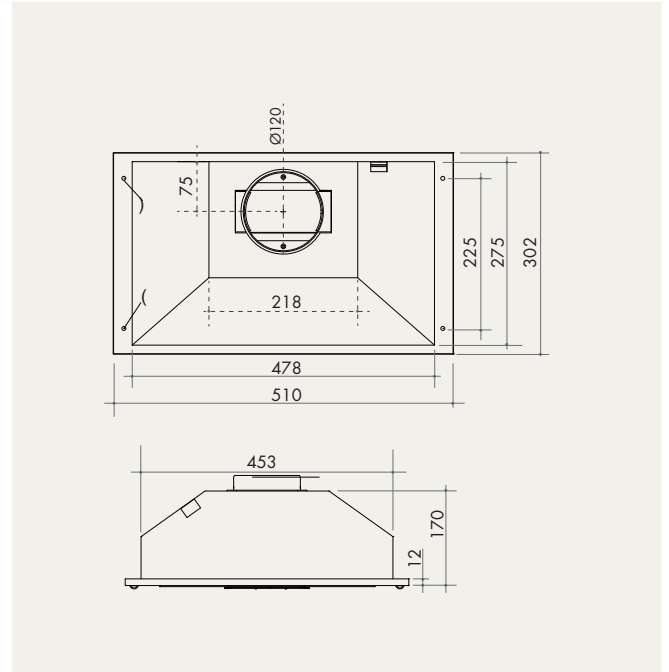

AUM51X

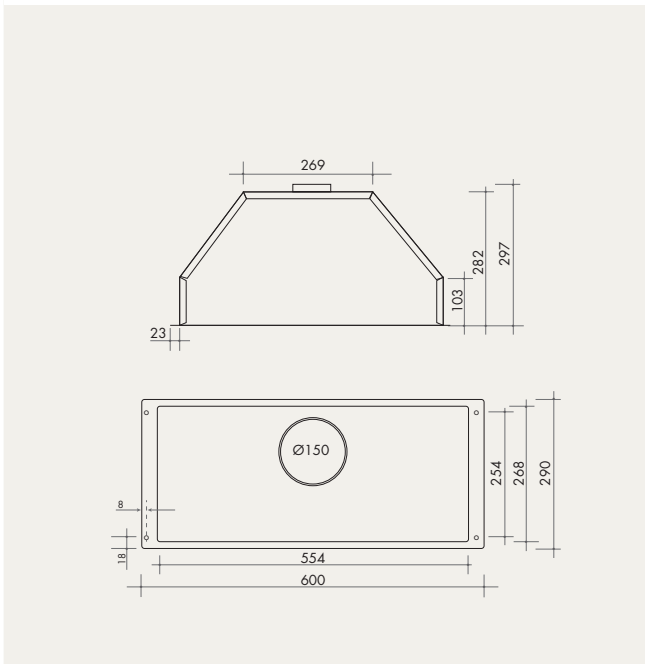

AUM60

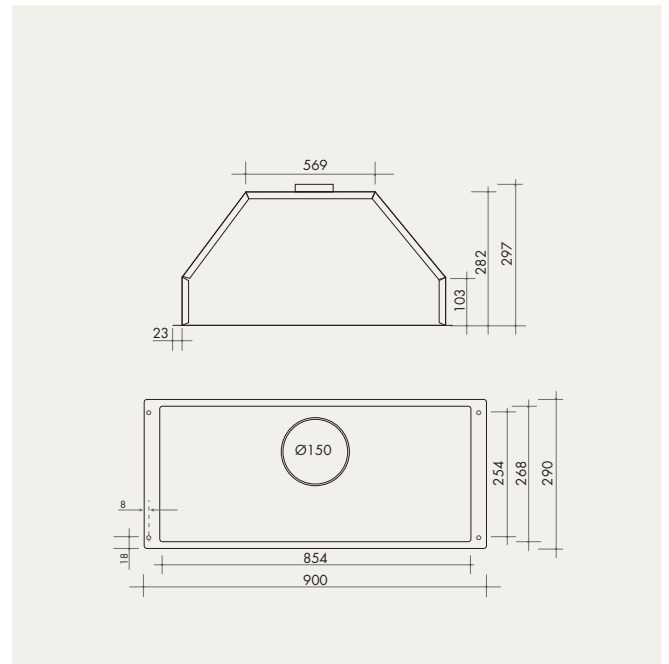


AUM90


PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.


TECHNICAL INFORMATION

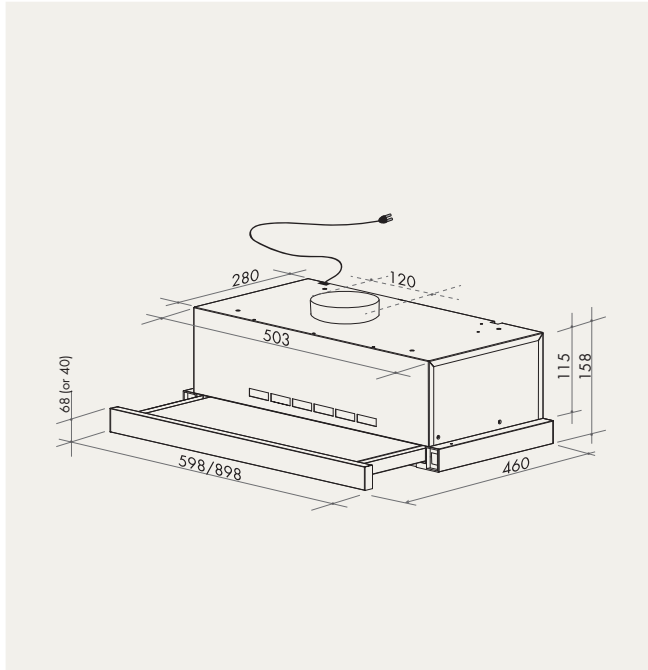


ASO600RX | ASO900RX

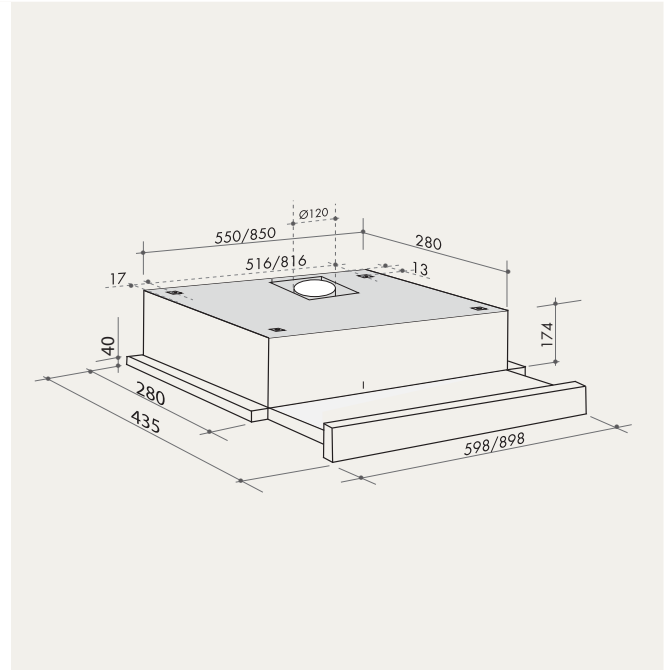

ASO601X | ASO901X
ASO620X | ASO920X

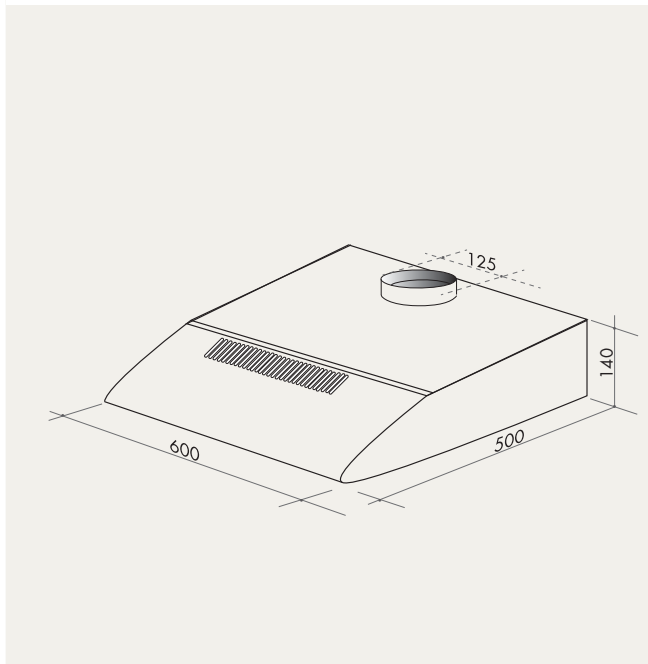

AFR6X

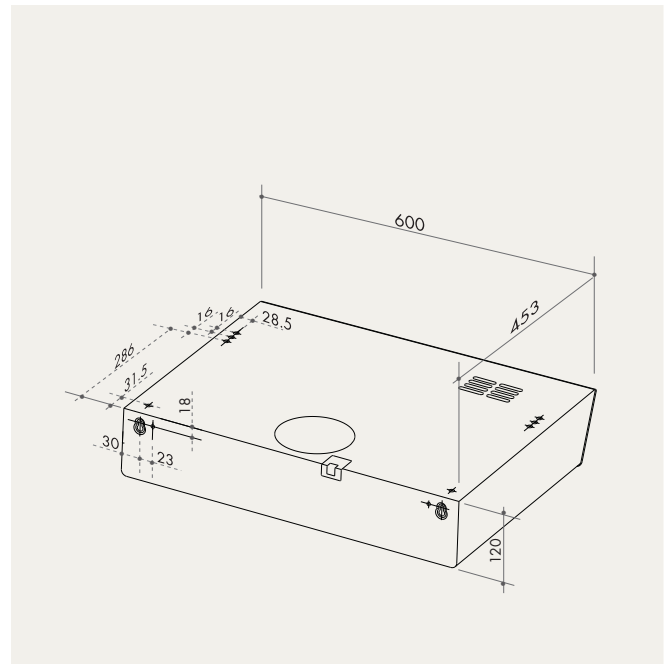

AFR60S | AFR60W

PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.



SINKS

HY 1160.500.20

double-bowl inset sink with drainer

- AISI 304 satin finish stainless steel 0.8mm thick
- size: 1160 x 500mm
- bowl size/depth: 345 x 400mm | 150/165mm
- cutout: 1140 x 482mm
- minimum cabinet size: 800mm



AVAILABLE WITH LEFT OR RIGHT-HAND BOWL

ME 400

single-bowl inset slim-top sink

- AISI 304 polished stainless steel 1mm thick
- size: 440 x 440mm
- bowl size/depth: 400 x 400mm | 210mm
- cutout: 422 x 422mm
- minimum cabinet size: 450mm

ALSO AVAILABLE: ME 451



ME 550

single-bowl inset slim-top sink

- AISI 304 polished stainless steel 1mm thick
- size: 588 x 435mm
- bowl size/depth: 548 x 395mm | 210mm
- cutout: 570 x 417mm
- minimum cabinet size: 600mm

ALSO AVAILABLE: ME 600.500



ME 790.500

single-bowl inset slim-top sink

- AISI 304 polished stainless steel 1mm thick
- size: 794 x 504mm
- bowl size/depth: 745 x 400mm | 210mm
- cutout: 772 x 482mm
- minimum cabinet size: 800mm



ME 400.60.50 double-bowl inset slim-top sink

- AISI 304 polished stainless steel 1mm thick
- size: 830 x 510mm
- bowl size/depth: 400 x 450:340 x 400mm | 228/210mm
- cutout: 812 x 492mm
- minimum cabinet size: 900mm



MU 340.50.50 double-bowl undermount sink

- AISI 304 satin finish stainless steel 1mm thick
- size: 740 x 440mm
- bowl size/depth: 340 x 400mm | 210mm
- cutout: 725 x 425mm
- minimum cabinet size: 800mm



MM 860.510.15 1.5 bowl inset slim-top sink with drainer

- AISI 304 polished stainless steel 1.0mm thick
- size: 864 x 514mm
- bowl size/depth: 170 x 400:340 x 400mm | 153/203mm
- cutout: 772 x 482mm
- minimum cabinet size: 600mm



AVAILABLE WITH LEFT OR RIGHT-HAND BOWL

ALSO AVAILABLE: MN 360.50.50
MM 780.510
MM 1160.510.20

ACCESSORIES



B20.42
chopping board



B30.42
chopping board



B32.34
chopping board



G21.40 black
chopping board




G21.40 white
chopping board




CS16.39
colander

TECHNICAL INFORMATION

INSET




Dimensions:(mm)
860 x 500

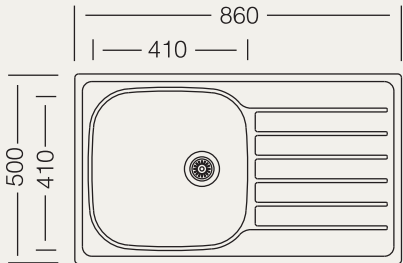


HY 860.500

INSET SLIM TOP




Dimensions:(mm)
440 x 440




ME 400

INSET SLIM TOP




Dimensions:(mm)
588 x 435




ME 550

INSET SLIM TOP




Dimensions:(mm)
794 x 504

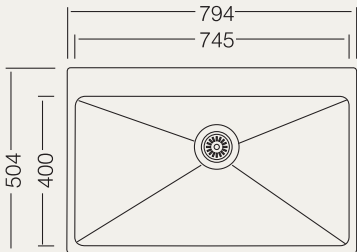


ME 790.500

INSET SLIM TOP



Dimensions:(mm)
800 x 490

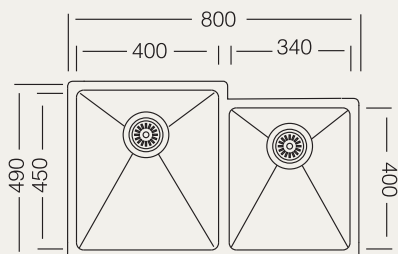


ME 400.60.40

INSET SLIM TOP



Dimensions:(mm)
740 x 440

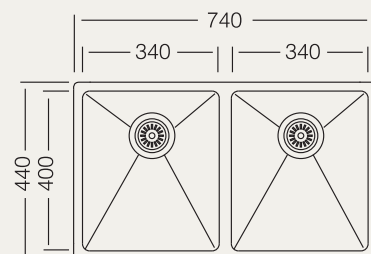


MU 340.50.50

INSET SLIM TOP



Dimensions:(mm)
864 x 514

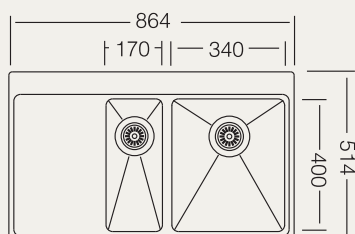

MM 860.510.15

DISHWASHERS

ADW7000X freestanding dishwasher

- stainless steel control panel
- 12 place settings
- 1–24 hour delay start
- half load
- height-adjustable top basket
- foldable lower racks & upper basket shelves
- 7 wash programs
- 1800W heating element
- self-clean filter system
- stainless steel tub, grey baskets
- upper and lower spray arms
- natural drying
- 52 dBA
- VDE inlet hose with VEE safety certificate
can be used with hot water (70–90°C)
- hot (max 90°C) or cold water connection
- inlet hose: 1800mm | outlet hose: 2000mm



i For technical diagrams please refer to page 78–79
10 AMP GPO, standard 3-pin plug and cord; 240V

ADW5000X freestanding dishwasher

- stainless steel control panel
- 13 place settings
- delay start option | 2-4-6-8 hours
- 52–55 dBA
- self-cleaning filtration
- anti-overflow system
- cold water connection
- easy-slide cutlery baskets
- concealed heating element
- 6 wash programs
- PEX-2 inlet hose — flexible, resistant to scale and chlorine, does not corrode or develop pinholes
- inlet hose: 1800mm | outlet hose: 2000mm



i For technical diagrams please refer to page 78–79
10 AMP GPO; standard 3-pin plug and cord; 240V

DISHWASHERS

ADWSI600X semi-integrated dishwasher

- stainless steel control panel
- semi integrated — door panel supplied and fitted by builder
- 12 place settings
- 6 wash programs
- 49 dBA
- delay start
- short wash program
- direct injection wash system
- dual zone alternative wash
- stainless steel interior
- Turbo drying system
- long-stem glass capacity
- self-cleaning microfilter
- rinse aid indicator
- VDE inlet hose with VEE safety certificate can be used with hot water (70–90°C)
- hot (max 90°C) or cold water connection
- inlet hose: 1800mm | outlet hose: 2000mm
- NB: kickplate not included



i For technical diagrams please refer to page 78–79
10 AMP GPO; standard 3-pin plug and cord; 240V

ADWFI600 fully-integrated dishwasher

- door panel supplied and fitted by builder
- 12 place settings
- 6 wash programs
- half-load function
- 49 dBA
- delay start
- short wash program
- direct injection wash system
- dual zone alternative wash
- stainless steel interior
- Turbo drying system
- long-stem glass capacity
- self-cleaning microfilter
- rinse aid indicator
- VDE inlet hose with VEE safety certificate can be used with hot water (70–90°C)
- hot (max 90°C) or cold water connection
- inlet hose: 1800mm | outlet hose: 2000mm
- NB: kickplate not included



i For technical diagrams please refer to page 78–79
10 AMP GPO; standard 3-pin plug and cord; 240V

DISHWASHERS

ADW4500X 45cm-wide freestanding dishwasher

- stainless steel control panel
- 9 place settings
- electronic control panel with LED display
- 6 wash programs
- height-adjustable upper basket
- 3-in-1 function
- 49 dBA
- delay start 1–24 hours
- half wash option
- natural drying
- cold water connection
- 1500mm inlet hose
- 1500mm outlet hose
- child lock

i For technical diagrams please refer to page 78–79
10 AMP, 3-pin plug



ADWFI458 45cm-wide fully-integrated dishwasher

- door panel supplied and fitted by builder
- 8 place settings
- 4 wash programs
- ECO wash program
- 45 dBA
- delay start 3–6–9 hours
- half wash option
- residual heat drying
- VDE inlet hose with VEE safety certificate can be used with hot water (70–90°C)
- hot (max 90°C) or cold water connection
- inlet hose: 1800mm | outlet hose: 2000mm

i For technical diagrams please refer to page 78–79
10 AMP GPO, standard 3-pin plug and cord; 240V




ADWSI458X 45cm-wide semi-integrated dishwasher

- stainless steel interior and control panel, door panel supplied and fitted by builder
- 8 place settings
- 6 wash programs
- ECO wash program
- 45 dBA
- delay start 3–6–9 hours
- half wash option
- residual heat drying
- cold water connection
- inlet hose: 1800mm | outlet hose: 2000mm


i For technical diagrams please refer to page 78–79
10 AMP GPO, standard 3-pin plug and cord; 240V




TECHNICAL INFORMATION

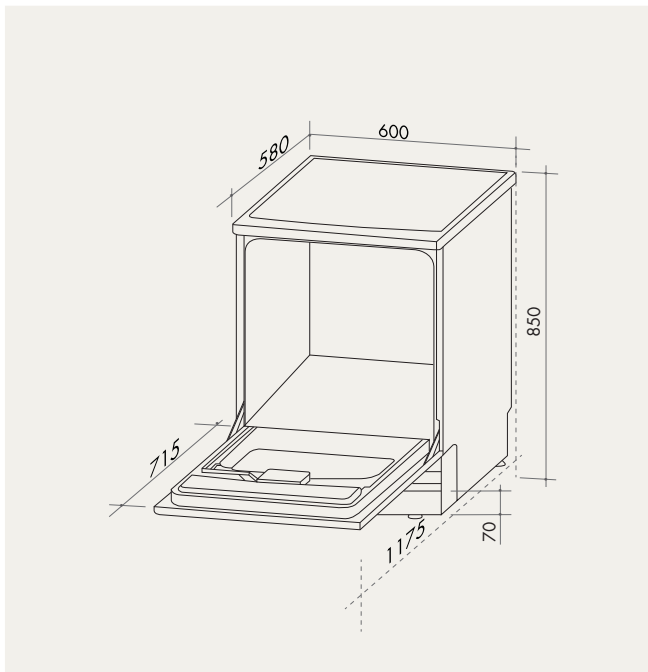


ADW7000X

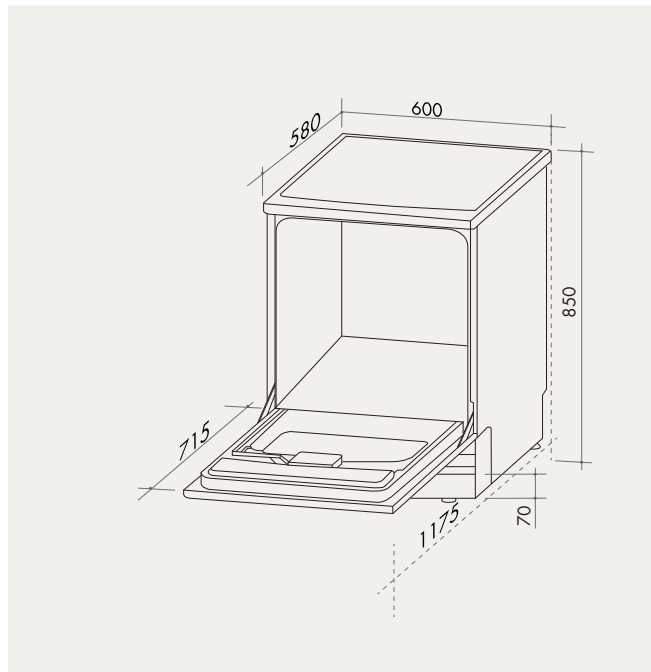

ADW5000X

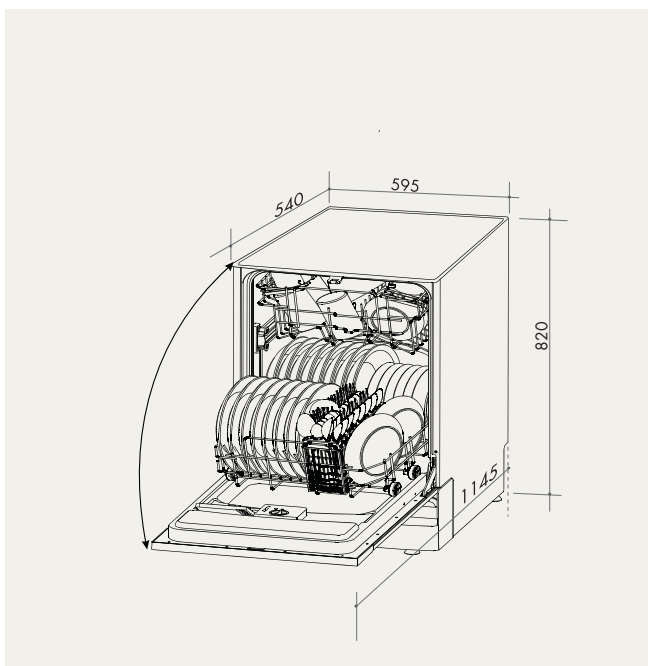

ADWSI600X

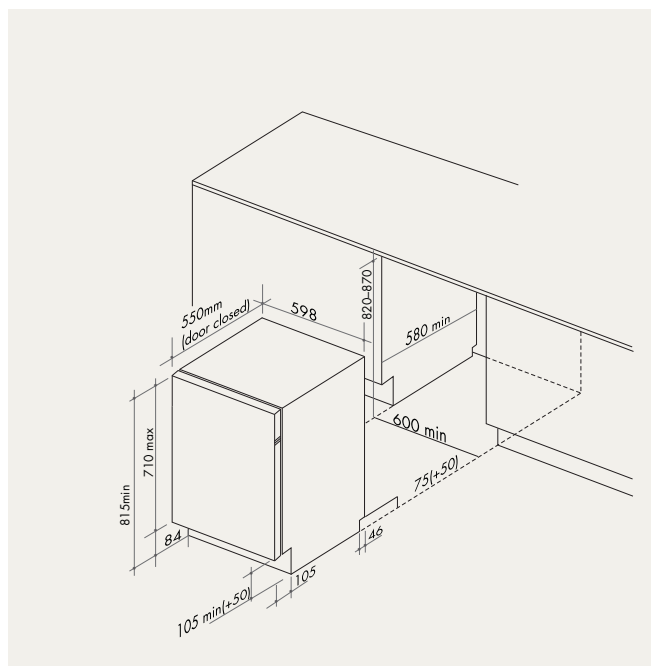


ADWFI600


PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.


TECHNICAL INFORMATION

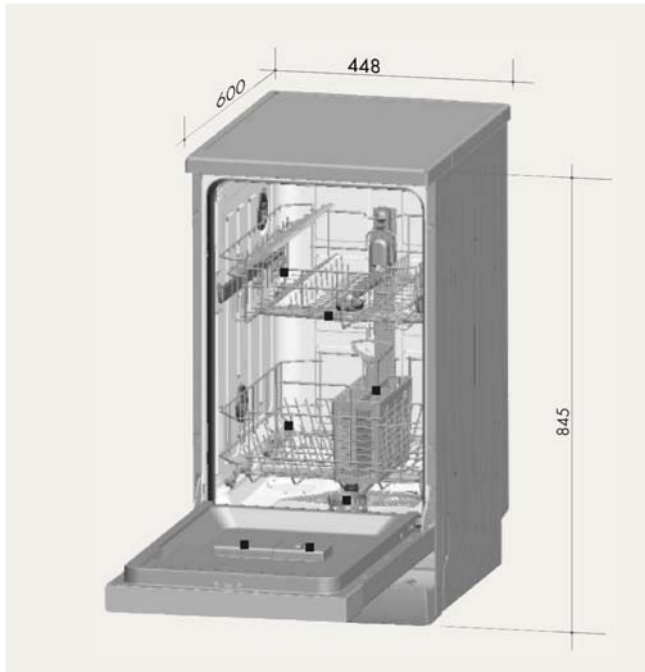

ADW4500X

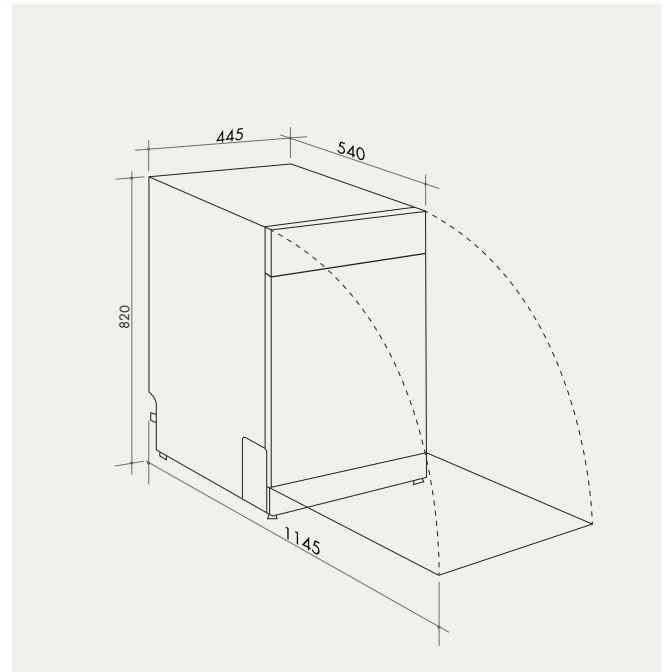

ADWSI458X

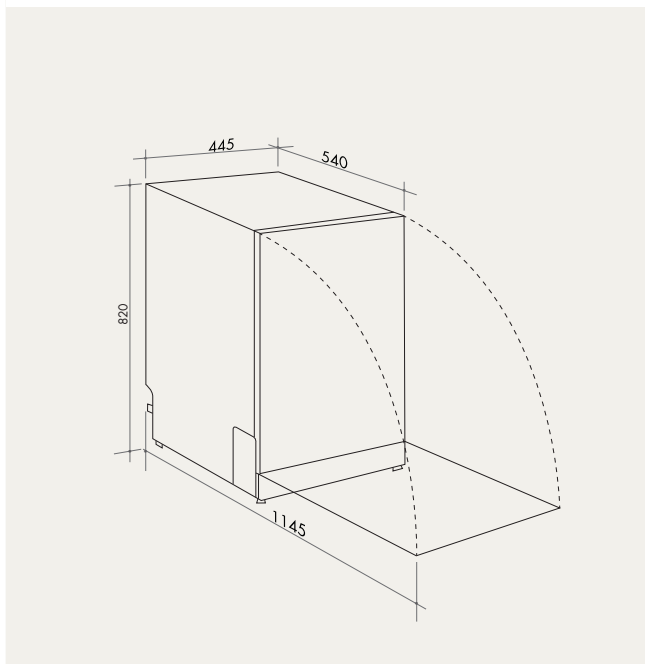

ADWFI458

PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

LAUNDRY | CLOTHES DRYER


ACD45A front-load clothes dryer

- white enamel
- 4.5kg dry weight capacity
- PTC heating element (quick dry)
- stainless steel drum
- automatic overheat cutoff
- easy-to-clean double-layer flint filter
- high-speed rotating turbo fan
- automatic disinfection
- child safety lock
- auto stop when door opened
- upright floor mounted
- upside-down wall mounted
- inner drum speed: 50 rpm
- thermostat: 60°C
- centrifugal blast type motor
- mechanical controls
- input power: 800–1400W
- heating power: 700/1300W
- motor output power: 90W
- <6% residual water
- drying time setting: 0–200 minutes
- drum dimensions: 560x304mm
- net weight: 20kg
- direct ducting: rear vent for optional fitting of supplied flexible ducting kit
- one-way drum rotation




600W x 435D x 700H
220–240 V, 50Hz
2.2m power cord with 3-pin 10 AMP plug

ALSO AVAILABLE: ACD60A 6.4kg dryer

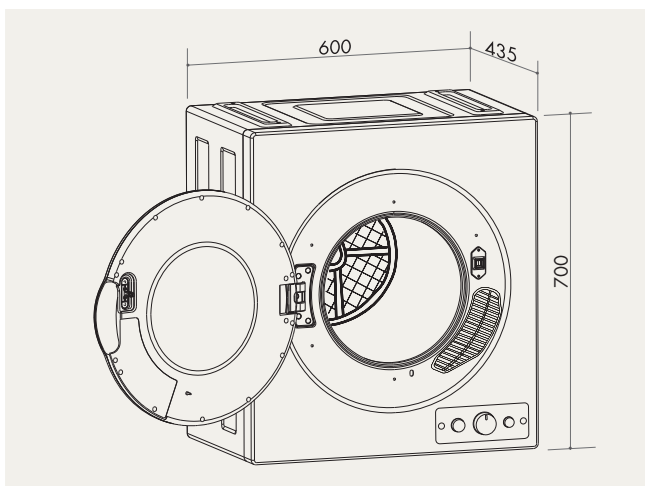

ACD45A

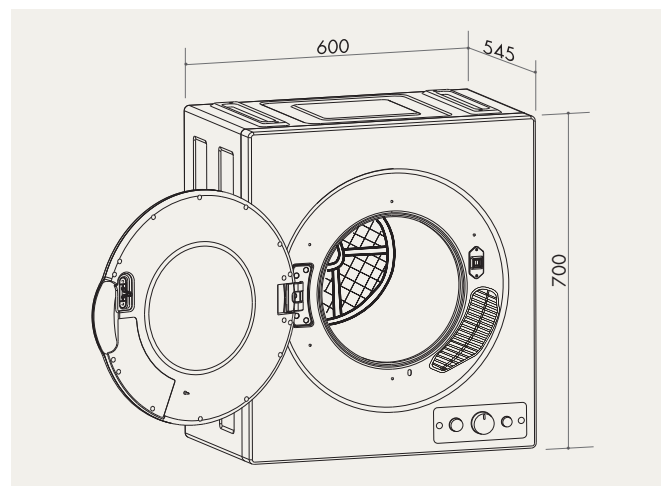

ACD60A





DISCLAIMER

Worldwide Appliances PTY LTD, trading as ARTUSI, is continually seeking ways to improve the design specifications, aesthetics and production techniques of its products. As a result alterations to our products and designs take place continually. Whilst every effort is made to produce information and literature that is up to date, this brochure should not be regarded as an infallible guide to the current specifications, nor does it constitute an offer for the sale of any particular product. Product dimensions indicated in our literature is indicative only. Actual product only should be used to define dimension cutouts. Distributors, and retailers are not agents of ARTUSI and are not authorised to bind ARTUSI by any express or implied undertaking or representation.

ARTUSI OFFICES ARE OPEN TUESDAY TO FRIDAY FROM 9AM-5PM AND SATURDAYS 10AM-4PM

NSW & ACT (head office)

48 Moore Street
Leichhardt
02 8569 4699

VIC | SA

1211 Toorak Road
CAMBERWELL
03 9809 2155

TASMANIA

Crisp Ikin
3 Pear Avenue
DERWENT PARK 7009
03 6272 7386

QLD

1/42 Cavendish Road
COORPAROO
07 3397 0850

WA | NT

10/55 Howe Street
OSBORNE PARK
08 9201 9188

New Zealand

PO Box 11.160
Sockburn Christchurch
0508 458 369

P: 1300 694 583

ARTUSI.COM.AU