


COMMERCIAL ONLY PRODUCT




EAN | 9345025000491

dimensions	162mmH x 598mmW x 304mmD closed 162mmH x 598mmW x 474mmD open NB: 262mm height when direct ducting
fascia rail	68mmH stainless steel, front recirculating 42mmH stainless steel, direct ducting
integration	fascia rail removable and replaceable for full integration
motor	60 watt
speeds	two: right-hand rocker switch
lighting	2 x LED
noise rating	38–52 dBA (full)
capacity	275m ³ /hr ducted 200m ³ /hr recirculated
filter	2 x one piece, 3-ply aluminium — removable, washable
supplied	<ul style="list-style-type: none"> fitted 68mmH stainless steel fascia rail tape-covered front recirculation vents accessory 42mmH stainless steel fascia rail 100mmH spigot adaptor for 125mm diameter ducting direct to atmosphere template instructions for installation, operation, maintenance brackets, screws
electricity supply	240 volt, 50Hz
electrical connection	connected one-metre power cord with 3-pin 10 amp plug
total wattage	140 watts
current	0.583 amp
packaged dimensions	700mm x 375mm x 235mm = 0.062m ³
net weight	6.5kg
gross weight	7.8kg


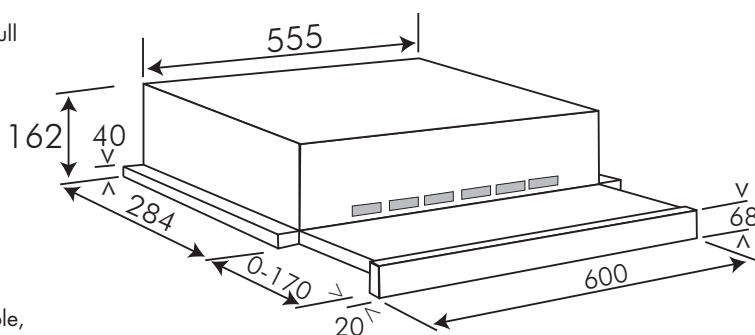


NB: drawings are not to scale — they are to assist only

COMMERCIAL ONLY PRODUCT

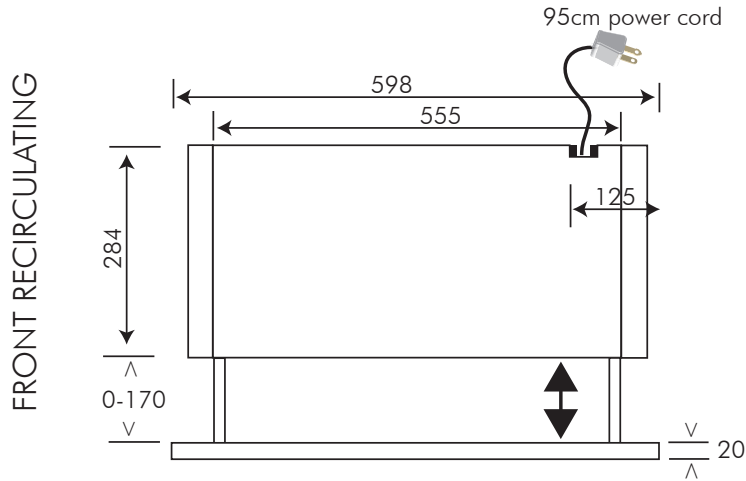


PLAN

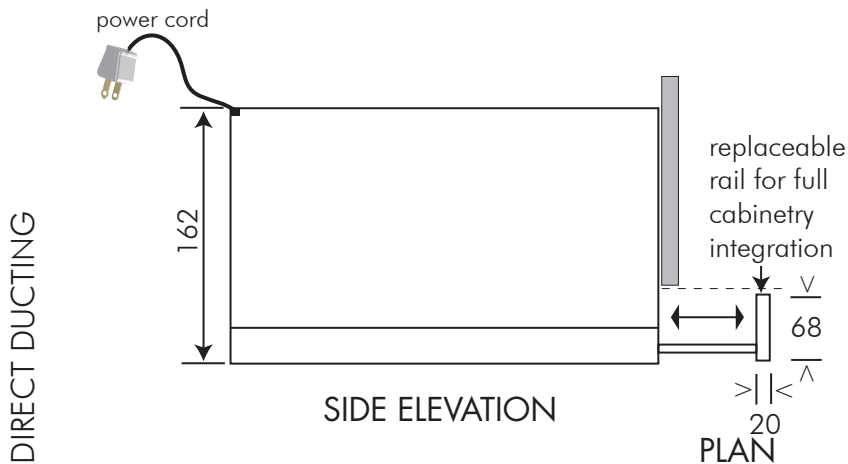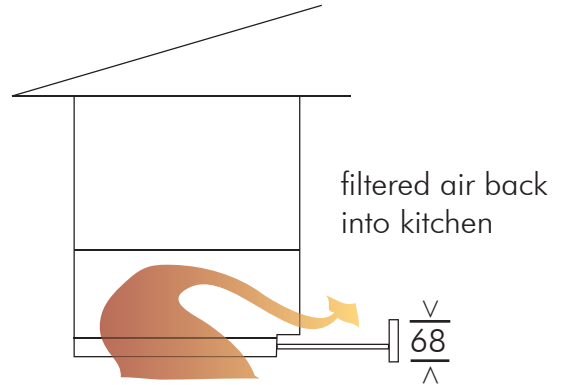


SIDE ELEVATION

PLAN

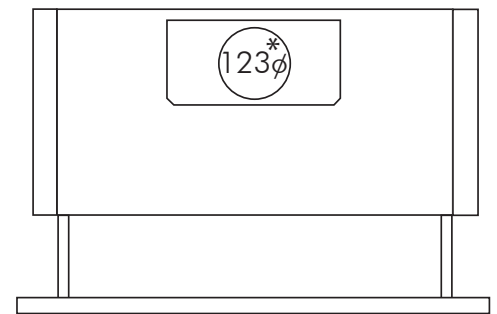

* spigot to fit
125mm diameter
ducting

NB: drawings are not to scale – they are to assist only

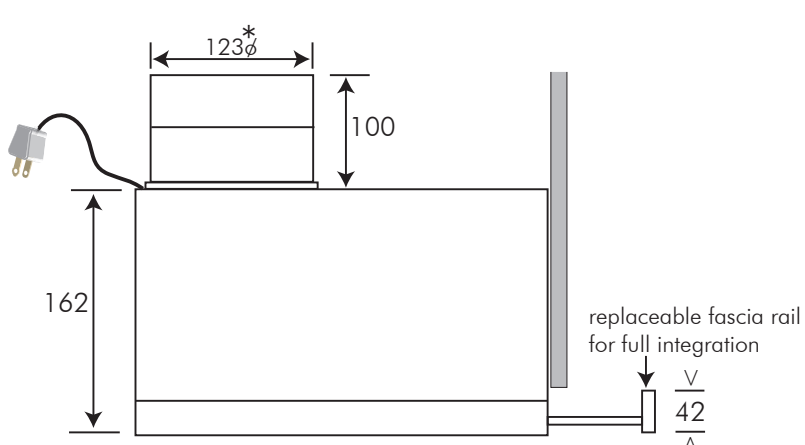

SIDE ELEVATION

