

Omega 60cm fixed rangehood with incandescent lights and stainless steel finish.




Technical details

Profile type:	Fixed
Size:	60cm
Installation type:	Built-in to a cupboard
Airflow:	333m ³ /hr NET
Number of motors:	2
Watts of motor:	100W
Speeds:	3
Washable aluminium filter:	3
Carbon filter:	recommended for recirculating(ORF110 x 2)
Filtration:	2 aluminium, removable and washable filters
Lighting:	2 x 40W incandescent
Noise level (DB):	57.9dBA
Air extraction:	Ducted or recirculating
Maximum current:	3 pin plug
Connection:	220 - 240V, 50Hz
Warranty:	24 months parts and labour

Aesthetics

Finish:	Brushed stainless steel
Front rail:	No
Extension flue:	No
Control type:	Backlit push buttons

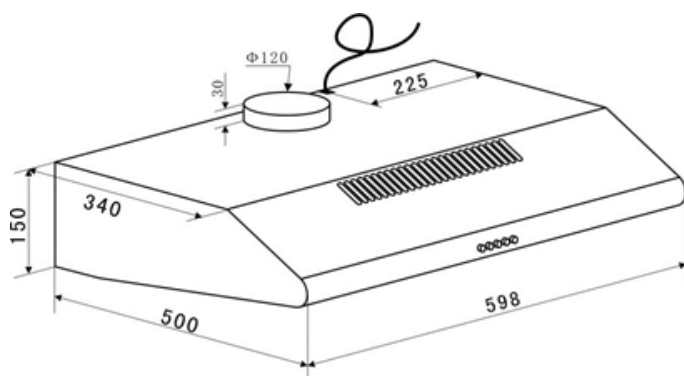

Dimensions/weight

Overall dimensions (mm):	150h x 600w x 500d
Chimney height (mm):	N/A
Flue diameter:	120mm
Net weight:	7.5kg



RECIRCULATION

Key features	Benefits
60cm width	Great for smaller cooktops and spaces.
Recirculation	A recirculating rangehood draws the air inside the appliance, cleans it and pushed it through the front panel. Because there is no ducting required, these rangehoods are very easy to install.
Fixed appliance	This appliance has a very shallow height meaning it is perfect for an area with low overhead cupboards.

NB: Drawings are not to scale - they are to assist only. WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cut-outs for appliances should only be by physical product measurements. The above information is indicative only.