





# HYDROTAP G5 CS ARC BRUSHED NICKEL



CHILLED   SPARKLING

FILTERED

## Order Code H52787Z11AU

Zip HydroTap Design Range Chilled, Sparkling, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.



Manufacturing Code	H52787Z11AU
Capacity	Residential

Tap	Zip HydroTap Design Range ARC Tap (Brushed Nickel)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	0.18kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W280mm x D406mm x H333mm
Product Approvals	WaterMark, RCM, ARC
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)


Installation Requirements


'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com](http://www.zipwater.com)'

Installation Detail


**Ventilation requirements** Contact your local service provider if ventilation is not suitable

**Clearance envelope**  
Position the Tap and the Command Centre as close together as possible.






Air outlet louvre (if required)  
Cut-out in door/wall, towards the top of the cabinet




Air inlet cut-out (required)  
Cut-out in cabinet floor

**HydroTap Tap options**


**HydroTap Arc Tap**



**HydroTap Cube Tap**




**Standalone Font with Arc Tap**




**Cutting detail**  
174 for HydroTap Arc/Cube  
3-off, 10 holes @ 155mm PCD, equispaced  
140 hole for bowl  
176 outline of Font  
35 hole for tap


**Tap Positioning**  
Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount on a Font (available as an accessory).




35mm hole for HydroTap Tap




4mm buffer pad air space



4mm buffer pad air space



4mm buffer pad air space

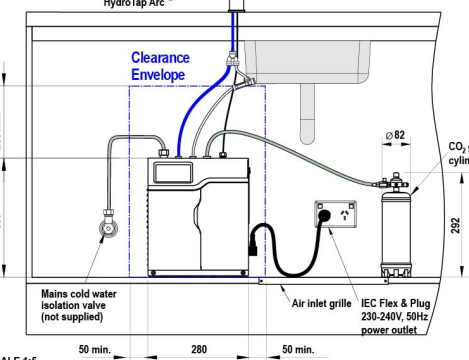

4mm buffer pad air space

Clearance Envelope

200 min.

333

50 min.

280

50 min.

Mains cold water isolation valve (not supplied)

Air inlet grille

IEC Flex & Plug 230-240V, 50Hz power outlet

CO<sub>2</sub> gas cylinder

292

406

**HydroTap G5 CS Home**

shown with HydroTap Arc

SCALE 1:5

ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

<https://www.zipwater.com/shop/hydotap/zip-hydotap-arc-cs-H52787Z00AU/zip-hydotap-arc-cs-H52787Z11AU>

2/3

