



also available in white enamel,
code DW601WA-1



finish	stainless steel with silverfrost control panel
size	855mmH x 598mmW x 580mmD with fitted worktop/lid — removable
capacity	twelve place settings (IEC international)
half load	top basket, all programs
programs	six
controls	fully electronic with LED displays
drying	residual heat hot air
quietness	43 dB
water security	pex hosing plus float switch
filtration	three stage
baskets	all grey bottom: 30cm diameter plates collapsible dish racks top: height adjustable, double-stack side racks
warranty	two years parts and labour



INSTALLATION

freestanding or built-in with fitted worktop/lid in place —
overall dimensions 855mmH x 598mmW x 580mmD

built-in only with worktop/lid removed —
overall dimensions 825mmH x 598mmW x 552mmD

- 12-plate capacity, up to 30cm diameter plates
- plate size: 25.5-30cm diameter bottom basket
- 20.5-24cm diameter top basket
- height-adjustable top basket — double-stack side racks in top basket, cups or long-stemmed glasses
- six wash programs —

Intensive	70° Celsius
Heavy	50° Celsius
Normal	50° Celsius
Rinse	70° Celsius
Rapid	40° Celsius
Soak	ambient
- half-load washing (top basket) on all programs
- three wash temperatures — 40°C, 50°C, 70°C
- four rinse temperatures — ambient, 50°C, 60°C, 70°C
- two pre-wash temperatures — ambient, 45°C
- water consumption on Normal program — 12 litres
- residual heat hot air drying
- quietness: 55 dBA sound pressure at main (wash) motor
43 dB fully loaded and operating
- bottom basket with collapsible racks for easy loading of pots, pans, casseroles and baking dishes
- top basket with four flip-down racks for double stacking of cups, long-stem glasses, long cooking and serving utensils
- electronic controls and displays: power ON/OFF, start, program selection, delay start, rinse aid
- filtration in three stages, all removable:
 - initial horizontal stainless steel filter
 - middle vertical cylindrical stainless steel filter
 - final stainless steel micromesh filter
- wash action by traditional two wands:
 - lower wand in all-stainless steel
 - upper wand in all polypropylene by direct water feed from rear wall
- water connection by 90°C tolerant pex hose — cold or hot connection
- 150 watt wash motor
- 20 watt pump motor
- 2100 watt water heating element

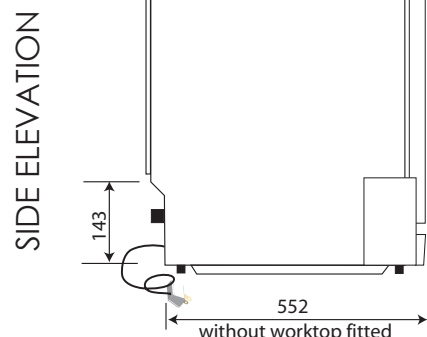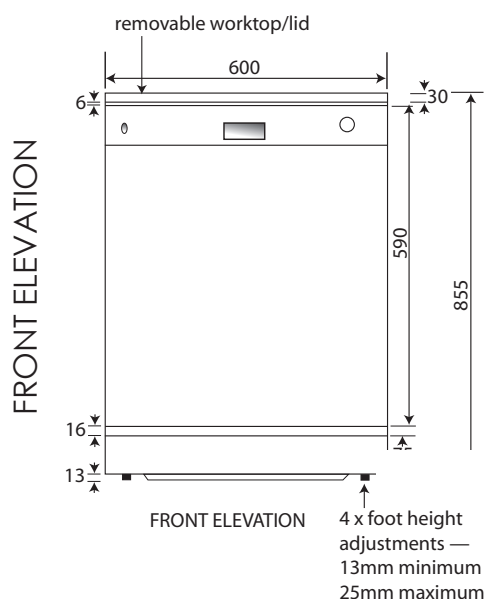

PLEASE NOTE:
drawings are not to scale. They are to assist only.

water mains pressure allowed —

minimum	maximum
5Ncm/2	1000Ncm/2
3psi	110psi
0.5bar	10bar

suitable for mains, gravity feed and tank pressures

water connection hot or cold —

pex hose tolerance	90°C
recommended max intake	60°C


electricity supply	240 volt 50 Hz
electricity connection	10 amp GPO
concealed element	2100 watt
wash motor	150 watt
pump motor	20 watt
max current	9.4 amp

packaged dimensions —

885 x 635 x 630 = 0.36m³

gross weight 50kg

net weight 43kg

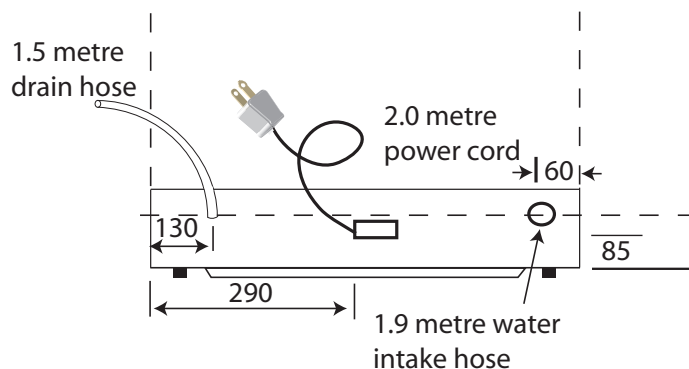

REAR ELEVATION — utilities

Program	Description	Symbol	Action					Time minutes
			prewash	wash	cold rinse	hot rinse	drying	
SOAK	progressive loading		ambient					9
RAPID	lightly soiled dishes not needing drying			40°	ambient	50°		51
RINSE	lightly soiled rinsing and drying only		ambient			70°	yes	71
NORMAL	normal soiling dishes & lightly soiled pans		2 x ambient	50°	ambient	60°	yes	139
HEAVY	heavily soiled loads — pots, pans & dishes		2 x ambient	50°	ambient	70°	yes	157
INTENSE	heaviest soiled pots, dishes, dried-on starch		45°	70°	2 x ambient	70°	yes	168