

BLU
Performance

Energy Efficiency At Its Best


Quality, Design and Innovation



LIEBHERR



SmartSteel: With SmartSteel used on the appliance door the visibility of fingerprints is reduced, making it very easy to clean. Maintain this beautiful door exterior simply with a wipe of a clean, dry or damp cloth.

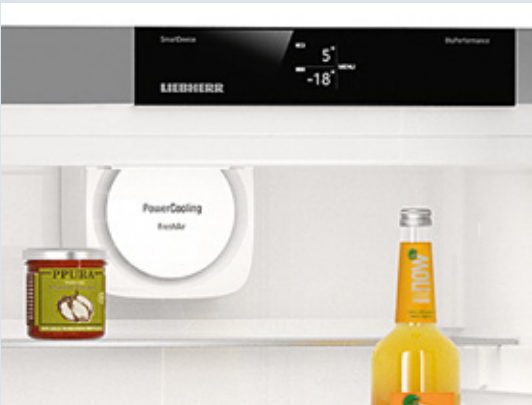

Touch control system: Our intuitive electronic touch control panel (found on most models) ensures all functions are easy and convenient to use as well as guarantees that the settings selected remain accurate and constant.




BioCool: The humidity level inside the BioCool-Box can be regulated using a slider control so that the freshness of produce stored in the box can be preserved for longer.

Liebherr's BluPerformance **CNef 4315** fridge-freezer is characterised by premium-quality materials, craftsmanship in every detail, and precision touchscreen electronic controls. The integration of all the refrigeration components into the base of the appliance ensures maximum energy efficiency, a greater net capacity, and enhanced freezer compartment ergonomics.

Meanwhile, BioCool technology keeps food fresher for longer. The elegant and timeless design of this model makes it a guaranteed highlight in any home.

CNef 4315 Comfort		Bio Cool	No Frost	Duo Cooling	Smart Steel
Energy consumption (kWh/y)	202				
Sound rating dB(A) *	38				
Refrigerator capacity litre	220				
Freezer capacity litre	101				
Fruits and vegetable bins	1 BioCool-Box				
Number of shelves	4				
Number of door racks	3				
Number of freezer drawers	3				
Electronic control	TFT display, touch electronic				
Door / side walls	Stainless steel with SmartSteel / Silver				
Refrigerator temperature range °C	+1°C to +9°C				
Freezer temperature range °C	-16°C to -26°C				
Temperature alarm	Visual and audible				
Defrost type	Automatic				
Interior light	LED				
Door alarm	Audible				
Integrated lock	No				
SoftSystem	No				
Door hinges	Right, reversible				
Product dimensions (H/W/D) cm	185 / 60 / 66.5				
Gross / Net weight kg	79.6 / 74.8				
Voltage V/Hz	220-240 / 50 / 60				

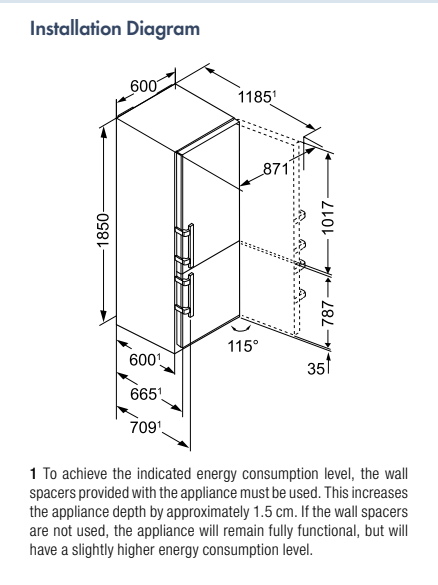

* Noise output - according to EN 60704-3