

Omega 70cm undermount rangehood with 2 halogen lights and stainless steel finish.




## Technical details

Profile type:	Undermount
Size:	70cm
Installation type:	Built into overhead cabinetry
Airflow:	820m³/hr NET
Number of motors:	1
Watts of motor:	265W
Speeds:	3
Carbon filter:	No
Filtration:	2 aluminium, removable and washable filters
Illumination:	2 x 40W halogen lights
Noise level (DB):	65dBA
Air extraction:	Ducted or Recirculated
Maximum current:	10amps 3 pin plug
Power requirements:	240V, 50Hz
Warranty:	24 months parts and labour

## Aesthetics

Finish:	Stainless steel
Front rail:	No
Extension flue:	No
Control type:	Backlit push buttons

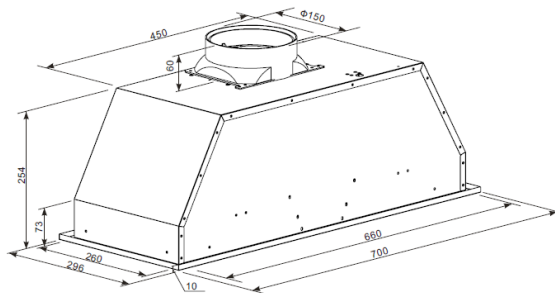

## Dimensions/weight

Overall dimensions (mm):	254h x 700w x 296d (+60h for flue connection)
Chimney height (mm):	N/A
Flue diameter:	150mm
Weight:	8.5kg



HIGH AIR FLOW

Key features	Benefits
<b>High air flow</b>	Omega high air extraction rangehoods typically draw more than 780m³ of air per hour keeping your kitchen smoke free.
<b>Concealed under cupboards</b>	This appliance will be concealed and look streamline under cupboards, perfect for small kitchens.
<b>70cm width</b>	Great for wide spaces and large cooktops.

NB: Drawings are not to scale - they are to assist only. WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cut-outs for appliances should only be by physical product measurements. The above information is indicative only.