



NB: this rangehood must be ducted direct to atmosphere

finish	satin stainless steel and glass
size	900mmW x 500mmD — maximum height 1056mm
capacity	710m ³ /hr net, 923m ³ /hr gross
installation	wallmount direct ducting to atmosphere NB: not designed for recirculation to kitchen
ducting	150mm diameter ducting material required
motor	198 watt centrifugal, twin impellers
illumination	two 20-watt halogen, separate button
speeds	three, separate buttons
delay stop	5-minute delay stop selection, separate button
filtration	2 x aluminium 4-ply grease filters, removable, washable
noise	34–56 dBA
power cable	1.7 metre
current	1.0 amp
warranty	two years parts and labour

PERFORMANCE

With a true net air extraction of 790m³/hr net an hour, the more vigorous styles of cooking, such as pasta boiling, griddle and stir frying, are catered for. At the touch of the speed control, the power can be switched down for the gentlest of simmers.

LOW MAINTENANCE

Easy cleaning is a premium with wipe-over 18/10 grade stainless steel surface. A single lift-out stainless steel and aluminium four-ply grease filter is even dishwasher safe. The lighting and speed controls are underslung and forward away from most of the vapour trail and there is easy access to the twin light globes.

QUIETNESS


34 to 56 dBA. The motor/impellor encasement and internal flue are smooth-walled to eliminate air drag and noise, hand-finished welded metal joins for no vibration.

SAFETY


Thermal overload protector on motor; fire-retardant hardened metal and mesh. VO self-extinguishing polycarbonate for motor housing and internal flue.

DUCTING THE AIR DIRECT TO ATMOSPHERE


Ideally, the filtered air is removed from the kitchen and household to the outside of the building. This method of rangehood installation ensures maximum removal of the heat, vapours, odours and particle-laden air.

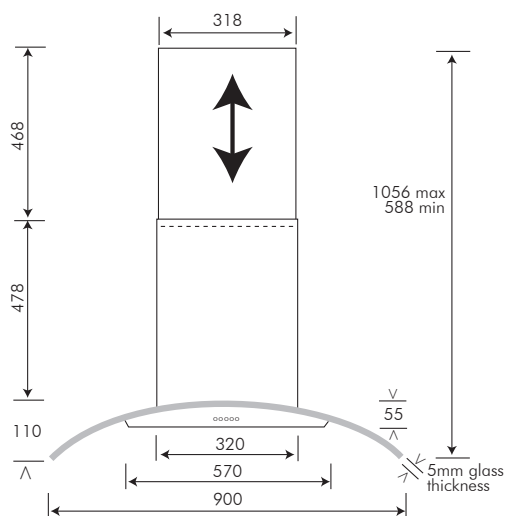

FRONT ELEVATION

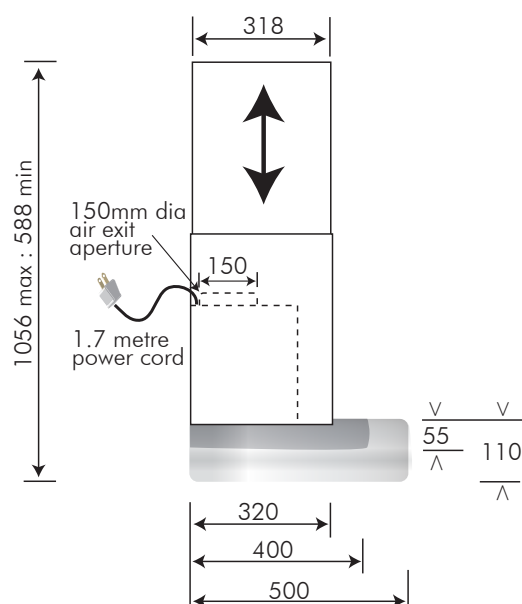

SIDE ELEVATION

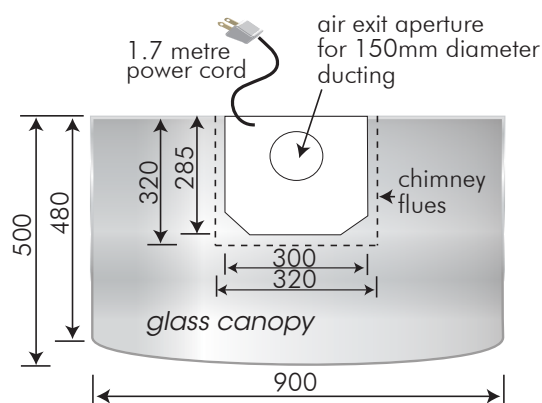

PLAN

motor
electricity supply
electrical connection


centrifugal with twin impellers
240 volts, 50 Hz
1.7 metre connected 10 amp power cord with 3-pin 10 amp plug for direct plugging to standard 10 amp GPO

motor wattage
illumination
total wattage
current supplied


220 watts
2 x 20 watt halogen
260 watts
1.1 amps

- instructions for installation, operation, maintenance
- screws, wood screws, raw plugs
- 2 x chimney brackets

PLEASE NOTE: drawings are not to scale. They are to assist only.

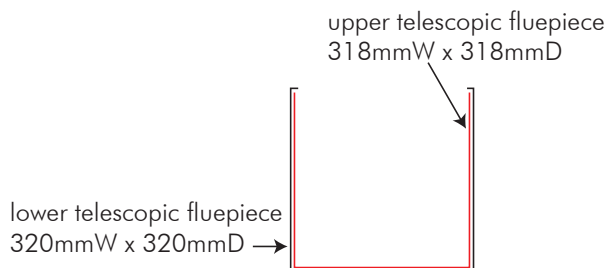

CHIMNEY PLAN

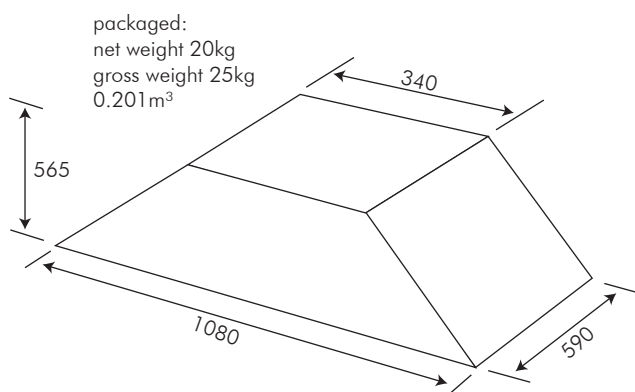

PACKAGING