

Series 2, Integrated Design Hood, 90 cm, Matt black DBB93BC60A



DWZ1IB1I6 Long-life Clean Air recirculation kit
 DWZ1IB6K2 Chimney extension 450-854 mm
 DWZ1IB6N2 Chimney extension 187-360 mm

- **Maximum storage space:** the T-shaped design offers lots of space and up to 20kg load capacity.
- **Fingerprint resistant design:** elegant carbon black finish with reduced fingerprint visibility.
- **Easy and versatile installation:** easy one-person installation with many flexible layout options.
- **Metal grease filters:** easy to clean, dishwasher safe design for fresher kitchen air.
- **LED lighting:** energy-efficient, bright, even cooktop illumination.

Typology: Built-in/Built-under
 Length electrical supply cord: 130 cm
 Required niche size for installation (HxWxD): ... 340mm x 860.0mm x 300mm mm
 Height of product, without chimney: 60 mm
 Minimum distance above an electric cooktop: 600 mm
 Minimum distance above a gas cooktop: 650 mm
 Net weight: 8.4 kg
 Type of control: mechanical
 Number of power settings: 3
 Max. air extraction: 384 m³/h
 Max. air recirculation: 291 m³/h
 Number of lights: 2
 Noise level: 65 dB(A) re 1pW
 Diameter of air outlet: 150 mm
 Grease filter material: Washable stainless steel
 EAN code: 4242005530304
 Connection rating: 100 W
 Voltage: 220-240 V
 Frequency: 50 Hz
 Plug type: AU plug
 Installation type: Built-in



4 242005 530304



Series 2, Integrated Design Hood, 90 cm, Matt black DBB93BC60A

Design:

- Installation in a upper kitchen cabinet
- Flush-fitted installation for a seamless integration in upper kitchen cabinets
- Clever Storage Solution: rangehood can hold up to 10 kg on each side
- Suitable for ducted or recirculated extraction

Features:

- 2 x LED 1.5W lights
- Colour Temperature: 3500 K
- Light Intensity: 290 lux
- 2 metal grease filter(s)

Comfort Features:

- Kitchen cabinet protection: additional side and rear protection against steam and vapour
- Push button controls for power and light
- 3 power settings

Cleaning Comfort:

- Easy to clean smooth surfaces and materials
- Metal grease filter dishwasher-safe
- Coated surfaces to reduce fingerprints

Exhaust/Ducted Mode:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:
 - Speed 1: extraction rate 174 m3/h; noise level 49 dB(A) re1pW
 - Speed 2: extraction rate 246 m3/h; noise level 57 dB(A) re1pW
 - Speed 3: extraction rate 384 m3/h; noise level 65 dB (A) re1pW

Recirculation Mode:

- For recirculation operation Long-life Clean Air recirculation kit (accessory) needed
- The Long-life Clean Air odour filter absorbs intense odours, such as fish, as well as pollen. The lifetime can be extended up to 4 times by refreshing the filter in the oven
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Long-life Clean Air recirculation kit (available as optional accessory):
 - Speed 1: extraction rate 140 m3/h; noise level 49 dB(A) re1pW
 - Speed 2: extraction rate 212 m3/h; noise level 59 dB(A) re1pW
 - Speed 3: extraction rate 291 m3/h; noise level 66 dB (A) re1pW

Technical Information:

- Consumption data:
- Power rating: 100 W
- Voltage: 220 - 240 V
- Sustainability:
 - Made in Germany: produced at a CO2 neutral production site
 - Expanded plastic free packaging
 - Available Long-life Clean Air odour filter with extended lifetime up to 4 times

Planning and Installation Information:

- Install into a 90cm wide upper kitchen cabinet


- Integrated Design Rangehood comfort installation: easy one -person installation system
- Appliance dimensions (HxWxD): 340 x 898 x 298 mm
- Built-in dimensions (HxWxD): min. 340 mm x 860 mm x min. 300 mm
- Enclosed spacers for installation in upper kitchen cabinets with maximum depth of up to 360 mm
- For installation in higher kitchen cabinets chimney extensions are available as optional accessories
- Diameter pipe Ø 150 mm
- Electrical cable length 1.3 m




BOSCH

Series 2, Integrated Design Hood, 90 cm, Matt black
DBB93BC60A

Measurements in mm
Side view

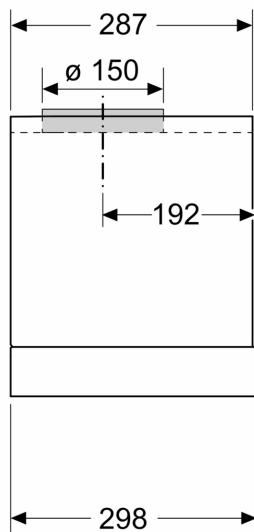


Measurements in mm
View from above

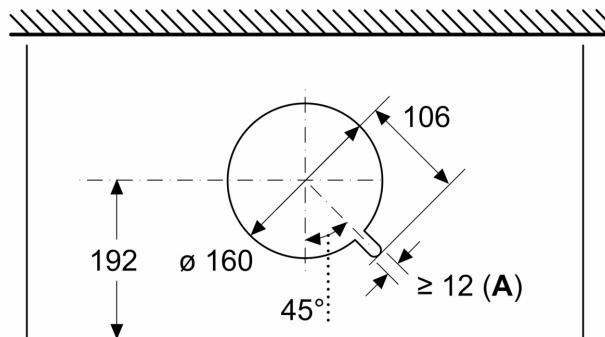

A: Cable bushing

Measurements in mm

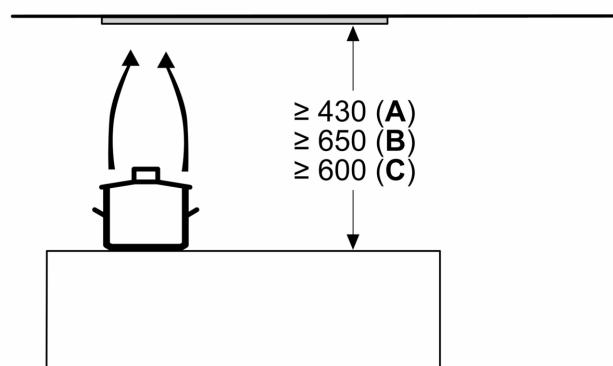


A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

Measurements in mm
Installation example with spice rack

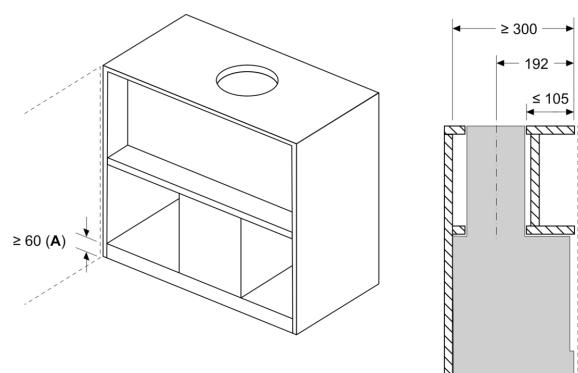


A: Area without hinges

Installation example in cupboards with crossbar, if installation with chimney extension (other accessories) not possible



BOSCH


Measurements in mm
Installation requirements for replacement
business




A: Area without hinges

Installation requirements for replacing existing
built-in hood solutions with integrated design
hood without replacing the cupboard

Measurements in mm
Front view

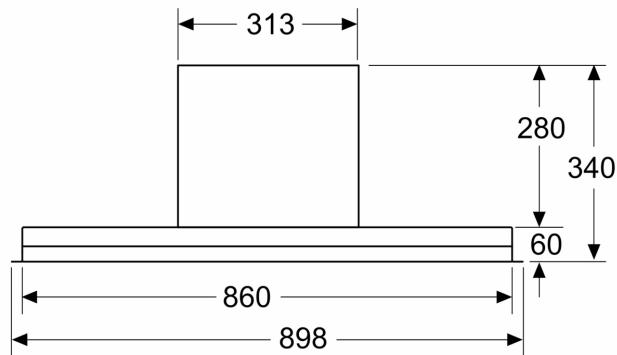


Measurements in mm
Installation example

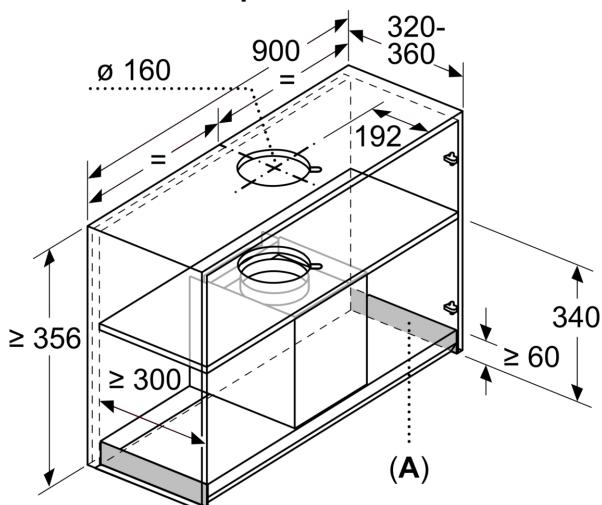


A: Area without hinges

Measurements in mm
Installation example in furniture cut-out

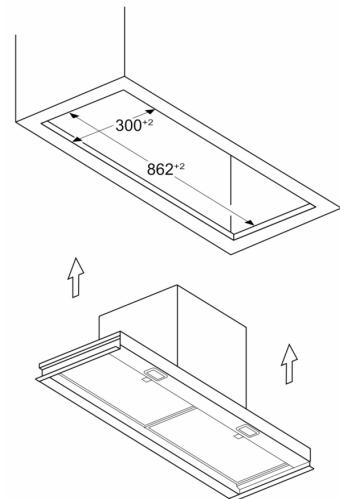

Measurements in mm

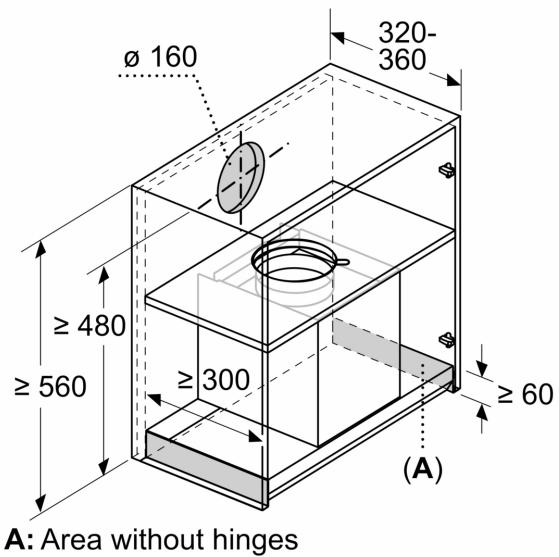

A: Area without hinges