

Serie | 4 Hoods**DWW097A50A
90 cm Wall-Mounted Stainless
Steel Canopy Rangehood****The wall-mounted rangehood: a functional design element in the kitchen.**

- **Extraction rate:** at 730 m³/h, it quickly ensures optimal kitchen air quality.
- **Especially quiet:** just 49 dB at level 2 (360 m³/h) - 150 mm ducted.
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- **Intensive speed setting with reset:** automatically resets the hood to regular speed setting after 6 min.

Technical Data

Color chimney :	Stainless steel
Typology :	Chimney
Approval certificates :	CE, VDE
Length electrical supply cord (cm) :	130
Height of the chimney (mm) :	582-864/582-974
Height of product, without chimney (mm) :	90
Minimum distance above an electric hob :	550
Minimum distance above a gas hob :	650
Net weight (kg) :	18.0
Type of control :	Electronic
Number of speed settings :	3
Maximum output air extraction (m ³ /h) :	460
Boost position output recirculating (m ³ /h) :	430
Maximum output recirculating air (m ³ /h) :	350
Boost position air extraction (m ³ /h) :	730
Number of lights :	3
Noise level (dB) :	55
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable aluminium
EAN code :	4242002779324
Connection Rating (W) :	139
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	AU plug
Installation typology :	Wall-mounted

**Optional accessories**

DHZ5345 : Recirculating kit
DSZ6240 : CleanAir Recirculation Kit

Serie | 4 Hoods

DWW097A50A

90 cm Wall-Mounted Stainless Steel Canopy Rangehood

The wall-mounted rangehood: a functional design element in the kitchen.

Heating Functions

- slimLine design
- Stainless steel

Power and Mode of Operation

- 3 power settings plus intensive setting
- 730 m³/h max. extraction rate
- Ducted and recirculated-air operation
- EcoSilence BLDC brushless motor
- Powerful single motor with twin fan
- Comfort & Convenience
- Intensive operation automatic revert - 6min
- 49 dB at level 2 (360 m³/h) - 150 mm ducted
- Additional sound insulation mats for optimised sound absorption
- Push button controls
- 3 x 3 Watt LED Lights
- Dual filter system with outer aluminium frame and inner metal grease filter
- Appliance width: 900 mm
- Dishwasher safe metal grease filters
- Accessories required for recirculation mode: CleanAir Module


Dimensions (HxWxD)

- Appliance - Ducted: 672-954 x 900 x 500 mm
- Appliance - Re-circulated: 672-1064 x 900 x 500 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)

Serie | 4 Hoods


DWW097A50A

90 cm Wall-Mounted Stainless Steel Canopy Rangehood

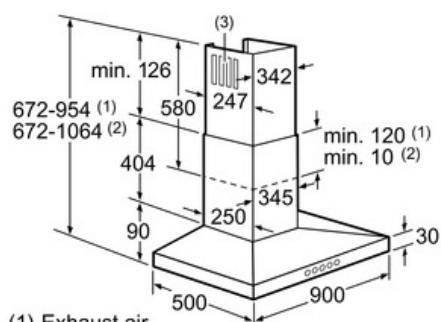


- (1) Exhaust air
- (2) Circulated air
- (3) Air outlet - Fit the exhaust air slot facing downwards

Measurements in mm

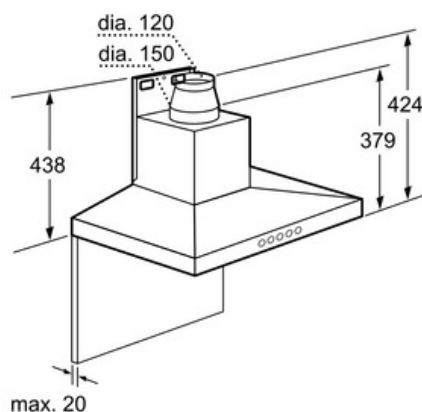


Measurements in mm

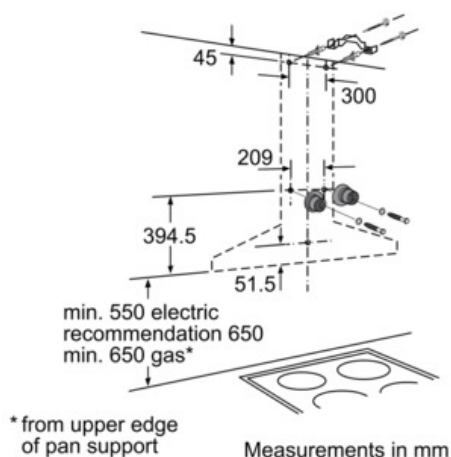

* from upper edge of pan support

Measurements in mm

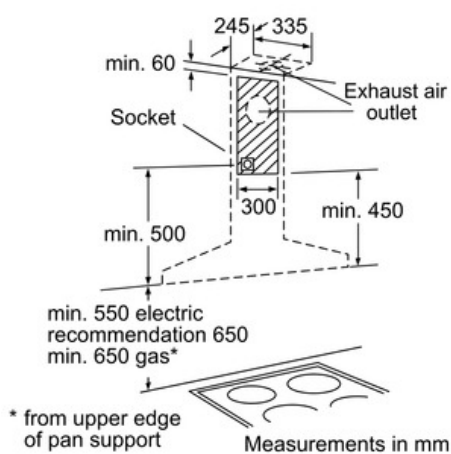

* from upper edge of pan support

Measurements in mm