

Quality, Design and Innovation





# LIEBHERR

Contents			
1 1.1 1.2 1.3 1.4	Appliance at a glance	<b>3</b> 3 3 4	
2	General safety instructions	4	
<b>3</b> 3.1 3.2	Putting into operation	<b>6</b> 6	
<b>4</b> 4.1 4.2	Storing food	<b>6</b> 6	
5	Saving energy	6	
6 6.1 6.1.1 6.1.2 6.1.3 6.1.4 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3	Controls  Controls and displays Status display Navigation Operating structure Display symbols  Control concept Activating/deactivating the function Selecting function value Activating/deactivating settings Selecting the setting value Go to the Customer menu  Functions Turn off appliance	7 7 8 8 8 8 9	
	WiFi		
5 🕏	Temperature	10	
°C/ <sub>F</sub>	Temperature unit	10	
D1	D-Value	. 10	
*	SuperCool	10	
$\bigcirc$	PowerCool	.10	
ŢŅŢ	PartyMode*	. 10	
	HolidayMode	.10	
$\Psi$	SabbathMode	11	
$\Box$	E-Saver	11	
(O)	CleaningMode	11	
-) <mark> </mark>	Display brightness	12	
	Door alarm	12	
×(m)	Entry lock	12	
Service No: Model	Info	12	

۲ <u>۲</u> ۲	Reminder	12
(5	Reset	. 12
6.4 6.4.1 6.4.2	Fault messages	. 12
7.1 7.2 7.3 7.4 7.5 7.6 7.7 7.8	Features.  Door rack Shelves Dividing shelf VarioSafe Drawers EasyFresh-Safe cover Adjusting the moisture levels Glass shelves Accessories	13 13 14 14 14 15 15 16
8 8.1 8.2 8.3 8.4	Maintenance	16 16 16 17
9.1 9.2 9.3 9.4 9.5	Customer help Technical specifications Operating noises Technical fault Customer Services. Model plate	17 17 18 19 19
10	Shutting down	19
<b>11</b> 11.1 11.2	Disposal  Preparing appliance for disposal  Disposing of the appliance in an environmentally	19
	friendly manner	20

The manufacturer is continually working on the further development of all types and models. Please be aware that we reserve the right to make changes to the shape, equipment and technology.

# Symbol

#### Explanation

Read instructions

Please read the information in these instructions carefully to understand all of the benefits of your new appliance.



## Full instructions on the internet

You can find detailed instructions on the internet using the QR code on the front of these instruction or by entering the service number at home.liebherr.com/fridgemanuals.

The service number can be found on the serial tag:





Fig. Example illustration



#### Check appliance

Check all parts for transport damage. If you have any complaints, please contact your agent or customer service.

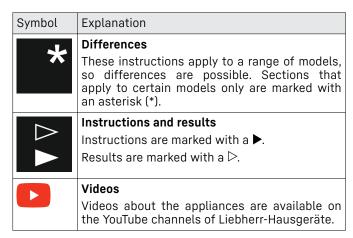

These operating instructions apply to:

R(D)	42/ 46/ 50/ 52	
Kf/ Ksfe	46/ 52	
SR	52	

## 1 Appliance at a glance

## 1.1 Scope of delivery

Check all parts for damage during transport. If you have any complaints, please contact your retailer or Customer Services (see 9.4 Customer Services).

Your new appliance comes with the following parts:

- Standalone appliance
- Features (depending on the model)
- Installation materials (depending on the model)
- User Guide
- Installation Guide

## 1.2 Overview of the appliance and features

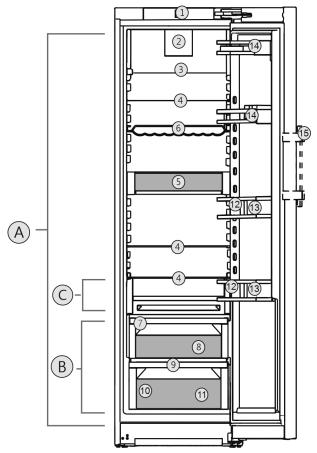


Fig. 1 Example illustration

#### Temperature range

- (A) Fridge compartment (B) EasyFresh
- (C) Coldest zone

#### **Features**

- (1) Controls (9) Outlet (2) Fan with FreshAir acti-(10) Serial tag
- vated charcoal filter (3) Separable storage
  - (11) Vegetable drawer\*
- shelf\* (4) Storage shelf (12) Bottle rack\* (5) VarioSafe\* (13) Bottle holder (6) Bottle shelf\* (14) Can rack (7) EasyFresh safe cover
- (8) EasyFresh safe
- (15) Lever handle\*

#### Note

► Shelves, drawers and baskets are arranged for optimum energy efficiency when the appliance is delivered. Changing how the shelves, for example, are inserted in the fridge compartment does not have any impact on energy consumption.

## 1.3 Appliance range of use

#### Intended use

The appliance is only suitable for cooling food products in a domestic or household-like environment. This includes, for example, use:

in staff kitchens, bed and breakfast establishments.

## **General safety instructions**

- by guests in country houses, hotels, motels and other accommodation,
- for catering and similar services in the wholesale trade.

The appliance is not suitable for freezing food;

The appliance is not suitable as a built-in unit.

All other types of use are not permitted.

#### Foreseeable misuse

The following applications are expressly forbidden:

- Storing and refrigerating medicines, blood plasma, laboratory preparations or similar substances and products based on the Medical Device Directive 2007/47/EC
- Use in outdoor areas with very high humidity
- Use in areas at risk of explosions

Misusing the appliance may lead to damage to the goods stored or they may spoil.

## Climate classifications

Depending on the climate classification the appliance is designed to operate in restricted ambient temperatures. The climate classification applying to your appliance is printed on the rating plate.

#### Note

► Keep to the specified ambient temperatures in order to guarantee that the appliance works properly.

Climate classification	for ambient temperatures of
SN	10 °C to 32 °C
N	16 °C to 32 °C
ST	16 °C to 38 °C
Т	16 °C to 43 °C
SN-ST	10 °C to 38 °C
SN-T	10 °C to 43 °C

## 1.4 Conformity

The refrigerant circuit has been tested for leaks. The appliance complies with the applicable safety regulations and with the corresponding directives.

The full text of the EU Declaration of Conformity is available on the following website: www.Liebherr.com

## 2 General safety instructions

Please keep these instructions in a safe place and pass them on to any subsequent owners.

Read these operating instructions carefully before use to ensure safe and correct use of the appliance. Follow the instructions, safety instructions and warning messages included at all times. They are important for ensuring you can operate and install the appliance safely and without any problems.

## Danger for the user:

- This device can be used by children and people with impaired physical, sensory or mental abilities or with a lack of experience and knowledge provided that they are supervised or have received instruction in the safe use of this device, and about the resulting hazards. Children must not play with this appliance. Cleaning and user maintenance work must not be carried out by children without adult supervision. Children aged between 3 and 8 are allowed to load and unload the appliance. Children below the age of 3 must be kept away from the appliance unless they are under continuous adult supervision.
- The socket must be easily accessible so that the appliance can be disconnected quickly from the electricity in an emergency. It must not be located in the area behind the appliance.
- When disconnecting the appliance from the supply, always take hold of the plug. Do not pull the cable.
- In the event of a fault pull out the mains plug or deactivate the fuse.
- Do not damage the mains power cable. Do not operate the appliance with a defective mains power cable.
- If the supply cord is damaged, it must be replaced by a special cord or assembly available from the manufacturer or its service agent.
- Only customer service or other specially trained staff may repair or perform other operations on the appliance.
- Only assemble, connect and dispose of the appliance according to the instructions.
- Special lights, such as LED lights on the appliance, are used to illuminate the interior of the appliance and are not suitable for room lighting.

#### Fire hazard:

 This appliance contains a refrigerant which is environmentally friendly, but flammable. Leaking refrigerant may ignite. It is hazardous for anyone other than an Authorised Service Person to service this appliance. In Queensland, the authorised Service Person MUST hold a Gas Work Authorisation for hydrocarbon refrigerants, to carry out Servicing or repairs where the gas system is being opened or charged.

- The coolant used (information on the model plate) is ecofriendly but also flammable. Any leaking coolant may ignite.
  - Do not damage the refrigerant circuit pipes.
  - Do not handle ignition sources inside the appliance.
  - Do not use electrical appliances inside the appliance (e.g. steam cleaners, heaters, ice cream makers, etc.).
  - If the refrigerant leaks: remove any naked flames or ignition sources from the vicinity of the leakage point. Properly air the room. Inform customer services.
- Do not store explosives or sprays using combustible propellants such as butane, propane, pentane, etc. in the appliance. To identify these spray cans, look for the list of contents printed on the can, or a flame symbol. Gases possibly escaping may ignite due to electrical components.
- Keep burning candles, lamps and other items with naked flames away from the appliance so that they do not set the appliance on fire.
- WARNING: Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction.
- WARNING: Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- WARNING: Do not damage the refrigerant circuit.
- Please be sure to store alcoholic drinks or other packaging containing alcohol in tightly closed containers. Any alcohol that leaks out may be ignited by electrical components.

#### Danger of tipping and falling:

 Do not misuse the plinth, drawers, doors etc. as a step or for support. This applies particularly to children.

#### Danger of food poisoning:

- Do not consume food which has been stored too long.

#### Danger of frostbite, numbness and pain:

- Avoid prolonged skin contact with cold surfaces or refrigerated/frozen goods or take protective measures, e.g wear gloves.
- Do not consume ice cream, water ice or ice cubes immediately and do not consume them too cold.

## Danger of injury and damage:

- Hot steam can lead to injury. Do not use electrical heating or steam cleaning equipment, open flames or defrosting sprays to defrost.
- Do not use sharp implements to remove the ice.

## Risk of crushing:

 Do not hold the hinge when opening and closing the door. Fingers may get caught.

## Symbols on the appliance:



This symbol may be located on the compressor. It relates to the oil in the compressor and makes reference to the risk that: Swallowing or inhaling can be fatal. This advice is only relevant to recycling. There is no danger in normal operation.



This symbol is located on the compressor and indicates the danger of flammable materials. Do not remove the sticker.



This or a similar sticker may be located on the rear of the appliance. This sticker indicates that there are vacuum insulation panels (VIP) or perlite panels in the door and/or housing. This advice is only relevant to recycling. Do not remove the sticker.

# Please note the warning messages and other specific advice in the other chapters:

À	DANGER	indicates an immediately hazardous situation which will lead to death or serious injuries if it is not avoided.
<u>^</u>	WARNING	indicates a hazardous situation which may lead to death or serious injuries if it is not avoided.
<u> </u>	CAUTION	indicates a hazardous situation which may lead to minor or moderate injuries if it is not avoided.
	NOTICE	indicates a hazardous situation which may lead to damage to property if it is not avoided.
	Note	indicates useful instructions and tips.

## 3 Putting into operation

## 3.1 Switching on appliance

Ensure that the following conditions are met:

- ☐ Appliance is set up and connected according to installation instructions.
- ☐ All adhesive strips, adhesive and protective films as well as transport safety devices in and on the appliance are removed.
- ☐ All marketing leaflets are removed from the drawers.

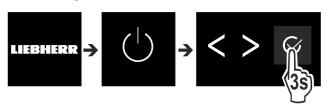


Fig. 2

- ▶ Switch on the appliance using the control panel next to the display.
- > The status display appears.

#### The appliance starts in DemoMode:

If the appliance starts in DemoMode, you can deactivate DemoMode within the next 5 minutes.

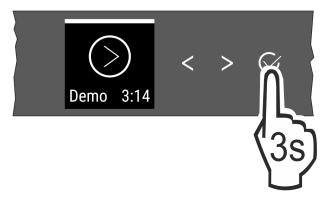


Fig. 3

- ▶ Press Confirm next to the display for 3 seconds.
- DemoMode is deactivated.

#### Note

The manufacturer recommends:

▶ Place the food inside: Wait for around 6 hours until the set temperature is reached.

## 3.2 Inserting the components

#### Note

Accessories can be purchased from the Liebherr-Hausgeräte store at home.liebherr.com/shop/de/deu/ zubehor.html.

▶ Insert the supplied components to make the most of your appliance.

## 4 Foods management

## 4.1 Storing food



### WARNING

Risk of fire

▶ Do not use any electrical appliances in the food area of the appliance unless recommended by the manufacturer.

#### Note

The energy consumption increases and the cooling power goes down if ventilation is not sufficient.

Always keep air slots clear.

When storing food, always observe the following:

- ☐ Air vents on the inside rear wall are unobstructed.
- ☐ Air vents on the fan are unobstructed.
- ☐ Food is in sealed packaging.
- ☐ Foods that easily absorb or give off smell or taste are stored in sealed containers or covered.
- ☐ Raw meat and fish are in clean, sealed containers to prevent them coming into contact with or dripping onto other foods.
- ☐ Liquids are in sealed containers.
- ☐ Foods are not stored too closely together, as the air needs to circulate.

#### Note

Failure to follow these guidelines can lead to food perishing.

## 4.1.1 Fridge section

The natural air circulation creates a range of temperatures.


#### Arrange your food as follows:

- ▶ In the top section and in the door: butter and cheese, preserves and tubes.
- In the coldest zone Fig. 1 (C): Perishable foods such as ready-to-eat meals, meat and sausages
- On the bottom shelf: Raw meat and fish

## 4.1.2 EasyFresh-Safe 🗇 🥖 🔘







fruit and vegetables.

The air moisture in the compartment depends on the moisture content of the items being stored and the number of times the door is opened. You can adjust the air moisture.

#### Arrange your food as follows:

- ► Store your loose fruit and vegetables.
- Excessive air moisture: Regulate the air humidity (see 7.7 Adjusting the moisture levels).

## 4.2 Storage times

Refer to the specified storage times as a guide.

In the case of foods with a minimum shelf life, the date indicated on the packaging still applies.

#### 4.2.1 Fridge section

Always follow the best-before date stated on the packaging.

## 5 Saving energy

- Pay attention to good ventilation. Do not cover ventilation holes or grids.
- Always keep the fan air slits clear.

- Do not install the appliance in direct sunlight, next to an oven, radiator or similar.
- Energy consumption depends on the installation conditions, e.g. the ambient temperature (see 1.3 Appliance range of use). A warmer ambient temperature can increase the energy consumption.
- Open the appliance for as short a time as possible.
- The lower the temperature is set the higher the energy consumption.
- Sort your food: home.liebherr.com/food.
- Keep all food properly packed and covered. This prevents frost from forming.
- Only take food out for as long as necessary so that it doesn't warm up too much.
- Inserting warm food: allow to cool down to room temperature first.
- For longer periods of absence, use HolidayMode (see HolidayMode) .

## 6 Controls

## 6.1 Controls and displays

The display provides a quick overview of the temperature setting and the status of functions and settings. You can control the functions and settings either by deactivating/activating them or by selecting a value.

## 6.1.1 Status display



Fig. 4

(1) Temperature display of the fridge section

The Status display shows the set temperature and is the home display. From there, you can navigate to the options and settings.

#### 6.1.2 Navigation

Navigate in the menu to access the individual functions. An audible signal sounds after confirming a function or setting. If no selection is made after 10 seconds the display switches to the Status display.

The appliance is operated with the buttons next to the display.



Fig. 5

(1) Navigation arrow left/ (2) Confirm

#### Navigation arrow left/right Fig. 5 (1):

- Navigating in the menu. After the last menu page, it goes back to the first one.

#### Confirm Fig. 5 (2):

- Activating/deactivating a function.

- Open a submenu.
- Confirm a selection. After confirmation the display switches back to the menu.

#### Back to Status display: in the fastest manner:

- Close and open the door.
- or wait 10 seconds. The display switches to the Status display.

#### 6.1.3 Operating structure

The controls are explained by a template. The display changes depending on the function or settings.

#### Menus without a submenu

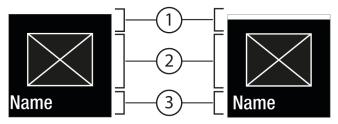


Fig. 6

- (1) Status deactivated / status activated white bar in the top area
- (2) Symbol or activated value
- (3) Menu: Function name or menu: Setting name

#### Menus with a submenu

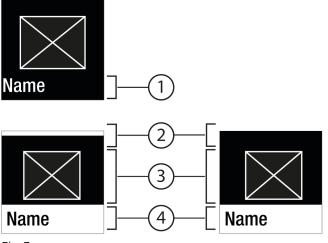


Fig. 7

- (1) Menu: Function name or menu: Setting name
- (2) Status
- (3) Symbol or activated value
- (4) Submenu: function name or submenu: Setting name

#### (2) off / on

You can navigation as follows:

- Press the left/right Fig. 5 (1) arrow to navigate.
- Press Confirm Fig. 5 (2) to open the submenu Fig. 7 (4).
  - Press the left/right Fig. 5 (1) arrow to navigate.
  - Set a new value: Press Confirm Fig. 5 (2) to select an active value Fig. 6 (1).
  - Back to the menu: Press Confirm Fig. 5 (2) to select the active value Fig. 6 (2).

#### 6.1.4 Display symbols

Display symbols provide information on the current appliance status:

## **Controls**

Symbol	Appliance status
$\bigcirc$	<b>Standby</b> The appliance or temperature zone is switched off.
-> 5 \\ -> 5 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\	Flashing number Appliance is working. Temperature flashes until the set value is reached.
	Flashing symbol Appliance is working. Setting is made.
	Bar grows steadily Function is activated.

## 6.2 Control concept

## 6.2.1 Activating/deactivating the function

You can activate/deactivate the following functions:

Symbol	Function
*	SuperCool <sup>x</sup>
	PowerCool <sup>x</sup>
*	PartyMode <sup>x*</sup>
	HolidayMode
$\bigcirc$	E-Saver

- \* When function is on, the appliance works harder. This means appliance noise when operating may be louder for a short while, and more energy will be consumed.
- ▶ Press the navigation arrows *Fig. 5 (1)* repeatedly until the function is displayed.
- ► Press Confirm Fig. 5 (2).
- > You hear the confirmation tone.
- > Status appears in the menu.

#### 6.2.2 Selecting function value

With the following functions you can set a value in the submenu:

Symbol	Function
5 °c	Setting the temperature Switch the appliance on/off

- ▶ Tap the navigation arrows Fig. 5 (1) repeatedly until the function is displayed.
- ▶ Press Confirm Fig. 5 (2).
- ► Select the setting value with the navigation arrows *Fig.* 5 (1).

#### Setting the temperature

- ▶ Press Confirm Fig. 5 (2).
- > You hear the confirmation tone.
- Status: On Fig. 6 (1) appears briefly in the submenu Fig. 7 (4).
- Display switches back to the menu.

#### 6.2.3 Activating/deactivating settings

You can activate/deactivate the following settings:

Symbol	Setting
	WiFi <sup>1</sup>
$\times l^{\mu}$	Entry lock <sup>2</sup>
$\Psi$	SabbathMode <sup>2</sup>
	Cleaning Mode <sup>2</sup>
<b>!</b> }	Reminders <sup>1</sup>
$\bigcirc$	Reset <sup>2</sup>
	Switch off <sup>2</sup>

- ► Tap the navigation arrows Fig. 5 (1) repeatedly until the settings appear.
- Press Confirm Fig. 5 (2).
- ► Tap the navigation arrows Fig. 5 (1) repeatedly until the desired setting is displayed.

#### <sup>1</sup> Activate setting (shortpress)

- Press Confirm Fig. 5 (2).
- You hear the confirmation tone.
- > Status appears in the menu.
- Setting is on / off.

#### <sup>2</sup> Activate setting (longpress)

- ▶ To Confirm Fig. 5 (2), press for 3 seconds.
- > You hear the confirmation tone.
- > Status appears in the menu.
- Display changes.

#### 6.2.4 Selecting the setting value

With the following settings you can set a value in the submenu:

Symbol	Settings
-\o'\-	Brightness
	Door alarm
°C/F	Temp. unit

- ► Tap the navigation arrows *Fig. 5 (1)* repeatedly until settings appears.
- ► Press Confirm Fig. 5 (2).
- ▶ Tap the navigation arrows Fig. 5 (1) repeatedly until the desired setting is displayed.
- ▶ Press Confirm Fig. 5 (2).
- ► Select the setting value with the navigation arrows Fig. 5 (1).
- ▶ Press Confirm Fig. 5 (2).
- > You hear the confirmation tone.
- > Status appears briefly in the submenu.
- Display switches back to the menu.

#### 6.2.5 Go to the Customer menu

You can see the following settings in the Customer menu:

Symbol	Function
D1	D-Value <sup>1</sup>
Setunt/Mor 1:3 1:19 N 0000000 PB 3W 101212 TOD_VAIS Software	Software

- ▶ Press the navigation arrows *Fig. 5 (1)* repeatedly until the settings appear.
- ▶ Press Confirm Fig. 5 (2).
- ► Press the navigation arrows *Fig. 5 (1)* repeatedly until the appliance information appears in the display.
- ▶ Press Confirm Fig. 5 (2).
- ► Enter the numerical code 151.
- ▷ The customer menu appears.
- ▶ Press the navigation arrows Fig. 5 (1) repeatedly in the customer menu until the desired setting appears.

#### 1 Select the value

- ▶ Press Confirm Fig. 5 (2).
- > You hear the confirmation tone.
- > Status appears briefly in the display.
- Display switches back to the menu.

#### <sup>2</sup> Activate the setting

- ► ToConfirm Fig. 5 (2), press for 3 seconds.
- > You hear the confirmation tone.
- > Status appears on the display.
- > The symbol flashes as long as the appliance is working.

#### 6.3 Functions



## Turn off appliance

This setting turns off the whole appliance.

#### Switching off the entire appliance

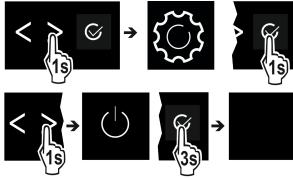


Fig. 8

► Activating/deactivating (see 6.2 Control concept).

> Off: Display goes black.



Use this function to connect your appliance to the WiFi. You can then operate it via the SmartDevice app on a mobile device. You can also use this function to disconnect or reset the WiFi connection. To connect your appliance to the WiFi, you need the SmartDeviceBox. For more information about the SmartDeviceBox and how to use the SmartDevice app:

#### Note

You cannot use the SmartDeviceBox in the following countries: Belarus, Kazakhstan, Russia. The SmartDevice function is not available.

#### **Establishing a WiFi connection**

Make sure that the following requirements are fulfilled:

- ☐ You have purchased and inserted a SmartDeviceBox.
- ☐ You have installed the SmartDevice app (see apps.home.liebherr.com).
- ☐ Registration in the SmartDevice app is completed.


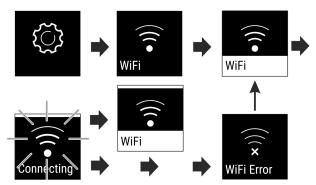


Fig. 9

- ► Activate the setting. (see 6.2 Control concept)
- Connection is established: Status: activated Fig. 6 (1) and WiFi connecting appears. The symbol flashes.
- Connection is established: Status: activated Fig. 6 (1) appears.
- Description Connect of Connect appear. The symbol is permanently visible.

#### Disconnecting from the WiFi

▶ Deactivate the setting. (see 6.2 Control concept)

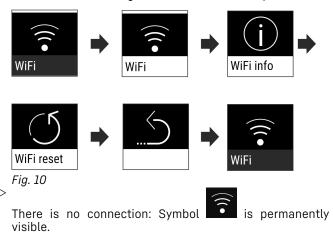

#### Resetting the WiFi connection

► Reset settings. (see 6.2 Control concept)

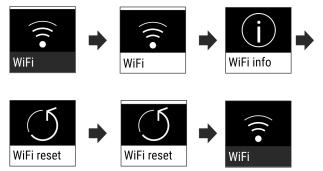


Fig. 11

> The connection and other settings are reset to the factory settings.

## **Controls**



## Temperature

The temperature depends on the following factors:

- The amount of times the door is opened
- How long the door is open for
- The room temperature of the installation site
- The type, temperature and amount of food

## Temperature zone

Recommended setting



5°C

#### Setting temperature

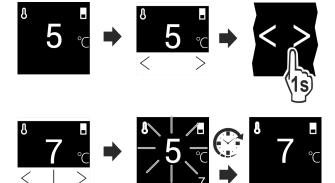


Fig. 12

- ► Complete the steps.
- ▶ Temperature is set.



## Temperature unit

This setting enables you to switch between Celsius and Fahrenheit as the temperature unit.

#### Selecting the setting value

► Set the value (see 6.2 Control concept) .



#### **D-Value**

#### Note

The specified energy consumption was determined without the dry rear panel. The appliance will work properly with a dry rear panel, but will consume slightly more energy. Liebherr recommends:

▶ Operate the appliance with dry rear panel to avoid visible condensation and goods freezing to the rear panel or each other.

The *D-Value* specifies whether you are operating your fridge compartment with or without a dry rear panel. The rear panel is mounted in the appliance in its delivery condition. The default setting for the *D-Value* is *D1*.

You can remove the rear panel for cleaning. To operate the appliance without a rear panel, you need to set the D-Value to D2.

#### Choose the setting

► Set the value in the customer menu. (see 6.2 Control concept)



# SuperCool

This function selects the lowest cooling temperature. This gives you colder storage temperatures.

This function is relevant to the fridge section Fig. 1 (A)

#### Jse:

- Cool large amounts of food quickly.

#### Activating/deactivating the function

- Using the fridge section: activate the function when you add the goods.
- ► Activating/deactivating (see 6.2 Control concept).

The function automatically turns off. The appliance goes back to normal mode. The temperature adjusts itself to the set level.



## **PowerCool**

This function provides the perfect blanket temperature to cool your food.

This function refers to the fridge section Fig. 1 (A).

#### Use:

- At higher room temperatures (from approx. 35 °C)
- When humidity is high e.g. on summer days
- When storing moist goods, to avoid condensation building up inside

#### Activating/deactivating the function

► Activating/deactivating (see 6.2 Control concept).

#### Note

The fan can run even when function is deactivated. This ensures optimal temperature distribution in the appliance.

Function activated: Energy consumption of the appliance is slightly increased.



## PartyMode\*

This option offers an assortment of special functions and settings that are useful if you are having a party.

The following functions are on:

SuperCool

All the functions can be adjusted flexibly and separately. Changes are discarded when the function turns off.

#### Activating/deactivating the function

- ► Activating/deactivating (see 6.2 Control concept) .
- $\triangleright$  On: All functions are activated at the same time.
- Deactivated: Previously set temperatures are restored.

After 24 hours the function turns off automatically.



#### HolidayMode

This function minimises the energy consumption during an extended absence. The temperature of the refrigerator compartment is set to 15 °C and this is displayed on the status screen when the temperature has been reached.

#### Use:

- Save energy if you plan to be away for a while.
- Avoid coming home to bad smells and mould.

#### Activating/deactivating the function

- ► Empty everything from the fridge section.
- Activating/deactivating (see 6.2 Control concept).
- On: Fridge temperature is raised.
- ▶ Off: the previously set temperature is restored.



## SabbathMode

With this function you can activate or deactivate the SabbathMode. If you activate this function, some electronic functions will be switched off. This allows your appliance to meet religious requirements on Jewish holidays such as the Sabbath and comply with STAR-K Kosher certification.

#### Appliance status with active SabbathMode

The status display continuously shows SabbathMode.

All functions in the display except the **Deactivate SabbathMode function** are locked.

Active functions remain active.

The display stays lit when you close the door.

The interior lighting is off.

Reminders are disabled. The set time intervals are paused.

Reminders and warnings are not displayed.

There is no door alarm.

There is no temperature alarm.

The defrost cycle only works for the specified time without taking account of appliance use.

After a power failure, the appliance returns to SabbathMode.

Appliance status

#### Note

This appliance has certification from the "Institute for Science and Halacha". (www.machonhalacha.co.il)

You can find a list of STAR-K-certified appliances at www.star-k.org/appliances.

#### **Activating SabbathMode**



#### WARNING

Danger of food poisoning from spoiled food!

If you have SabbathMode activated and a power failure occurs, no message appears in the status display about the power failure. Once the power is restored, the appliance continues to operate in SabbathMode. The power failure may mean that food spoils and the consumption of this food could lead to food poisoning.

After a power failure:

- ▶ Do not consume food that was frozen and has thawed out
- ► Call up the settings menu. (see 6.2 Control concept)
- ▶ Tap the navigation arrow repeatedly until the corresponding function is displayed.




Fig. 13

Complete the steps (see Fig. 13).

- SabbathMode is activated.
- > Status display continuously shows SabbathMode.

#### **Deactivating SabbathMode**

- ► Call up the settings menu. (see 6.2 Control concept)
- ▶ Tap the navigation arrow repeatedly until the corresponding function is displayed.

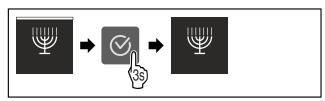


Fig. 14

- ► Complete the steps (see Fig. 14).
- SabbathMode is deactivated.



#### E-Saver

This function activates or deactivates the energy-saving mode. When you activate this function, the energy consumption decreases and the temperature increases by 2 °C in the appliance. The food remains fresh, but the shelf life is shortened.

Temperature zone	Recommended setting (see Temperature)	Temperature when E-Saver activated
5 c Fridge compartment	5 °C	7 °C

**Temperatures** 

#### Activating E-Saver

 Tap navigation arrow repeatedly until corresponding function is displayed.




#### Fig. 15

- ► Complete the steps (see Fig. 15).
- Energy-saving mode is activated.

#### **Deactivating E-Saver**

► Tap navigation arrow repeatedly until corresponding function is displayed.



#### Fig. 16

- ► Complete the steps (see Fig. 16).
- Energy-saving mode is deactivated.



#### CleaningMode

Use this setting to easily clean the appliance. This setting refers to the fridge section Fig. 1 (A).

## Controls

#### Use:

- Clean the fridge section by hand.

What happens on the appliance when this setting is on:

- The fridge section is switched off.
- The internal light is on.
- Reminders and warnings are not shown. There is no acoustic signal.

#### Activating/deactivating settings

- ► Activating/deactivating the setting (see 6.2 Control concept).
- > On: fridge section is off. Light stays on.
- ▶ Off: preset temperature is restored.

After 60 min the setting turns off automatically. The appliance then continues running in normal mode.



## Display brightness

Set the brightness level of the display.

You can set the following brightness levels:

- 40%
- 60%
- 80%
- 100%

#### Choose the setting

► Set the level (see 6.2 Control concept).



#### Door alarm

Set the time before the door alarm (see  $\,$  Close the door) sounds.

The options are as follows:

- 1 min
- 2 min
- 3 min
- Off

#### Choose the setting

➤ Set the time (see 6.4 Fault messages) .



#### **Entry lock**

This setting prevents unintentional use of the appliance, e.g. by children.

#### Use:

- Avoid settings being changed unintentionally.
- Avoid the appliance being switched off unintentionally.
- Avoid the temperature being changed unintentionally.

#### Activating/deactivating settings

► Activating/deactivating. (see 6.2 Control concept)





This setting allows the appliance information to be read out as well as access to the customer menu.

It provides the following information:

- Model name
- Index
- Serial number
- Service number

#### Show appliance data

- ► Tap the navigation arrows *Fig. 5 (1)* repeatedly until the settings appear.
- Press Confirm Fig. 5 (2).
- ► Tap the navigation arrows Fig. 5 (1) repeatedly until the information is displayed.
- ► Read the appliance info.



## Reminder

Reminders are given out acoustically by a beep and visually by a symbol in the display. The signal gets louder until the alert stops.



#### Replace FreshAir active carbon filter

This message appears when the air filter needs replacing.

- ► Change the air filter every six months.
- ► Confirm the message with OK.
- ▷ The service interval resets.
- > The air filter guarantees the air quality in the fridge.

#### Activating the setting

Activating/deactivating (see 6.2 Control concept) .



#### Reset

This function resets all settings to the factory settings. All settings that you have made thus far will be reset to their original values.

#### Activating the setting

► Activate (see 6.2 Control concept).

## 6.4 Fault messages

Fault messages appear in the display. There are two categories of fault message:

Category	Meaning
Message	Reminder of general procedures. You can carry out these procedures to eliminate the message.
Warning	Appears when there are malfunctions. A signal sounds in addition to the display. The signal becomes louder until you acknowledge by tapping the display. You can eliminate simple defects yourself. For more serious defects, you must contact customer service.

#### 6.4.1 Warnings



#### Close the door

This message appears if the door is open for too long.

You can set how long it takes for this message to appear .

Stop alarm: Confirm the message.

#### -or-

► Close the door.



This message appears if there is a fault with the appliance. An appliance component indicates a fault.

- ▶ Open the door.
- Note down the fault code.
- ► Confirm the message.
- > The signal tone stops.
- Close the door.
- ► Contact customer service. (see 9.4 Customer Services)

#### 6.4.2 DemoMode

If "D" appears on the display, demo mode is on. This option is designed for retailers, as it turns off all the cooling functions.

#### Stopping DemoMode

If you see the following running in the display:

- Confirm the display within the countdown.
- DemoMode is off.
  - If the timer is not running:
- ► Unplug the appliance.
- ▶ Plug the appliance in again.
- DemoMode is off.

## 7 Features

#### 7.1 Door rack

#### 7.1.1 Move/remove the door rack

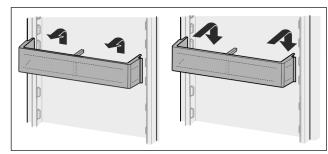


Fig. 17

- Slide the rack upwards.
- ► Pull forwards.
- Re-insert it in reverse order.

#### 7.1.2 Disassembling the door rack

The door rack can be taken apart for cleaning.

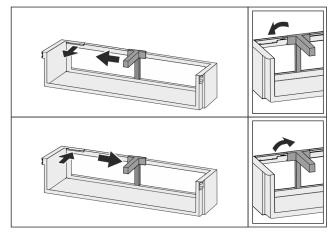


Fig. 18

Disassemble the door rack.

#### 7.2 Shelves

## 7.2.1 Adjusting/removing the shelves

The shelves are prevented from being pulled out accidentally by pull out stops.

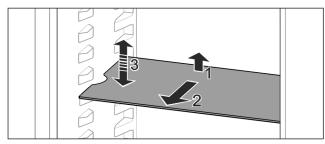


Fig. 19

- ► Lift the shelf and pull forward.
- □ Line up the side runner.
- ► Adjust the height of the shelf: Lift or lower it to the desired height and slide it in.

-or-

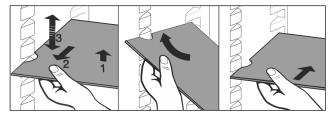


Fig. 20

- ▶ Remove the shelf completely: Pull it out to the front.
- ► Easier removal: Set the shelf at an angle.
- Insert the shelf again: Slide it in all the way.
- > The pull-out stoppers point downwards.
- $\triangleright$  The pull-out stoppers are behind the front support.

You can also remove the shelf above the EasyFresh compartments.

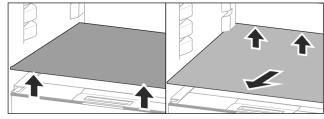


Fig. 21

Removing the shelf:

- Lift the shelf at the front and back.
- ► Pull it out towards you.

Do not store any goods on the compartment cover below! Inserting the shelf:

- ▶ Place the shelf at an angle, sloping down towards the
- > The pull-out stoppers point downwards.
- ► Slide the shelf into place.

#### 7.2.2 Dismantling the shelves

The shelves can be dismantled for cleaning.

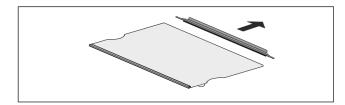


Fig. 22

▶ Dismantling the shelf.

## 7.3 Dividing shelf

## 7.3.1 Using the dividing shelf

The shelves are prevented from being pulled out accidentally by pull out stops.

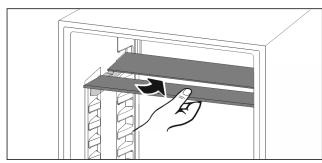


Fig. 23

▶ Push the dividing shelf underneath as shown.

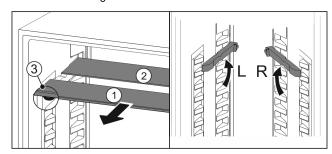


Fig. 24

#### Adjusting the height:

- ▶ Pull the glass panels out Fig. 24 (1) from the front, one at a time.
- ► Release the support rails and click in at the height you want.
- ► Slide in the glass panels one at a time.
- > Flat pull-out stoppers at the front, right behind the support rails.
- ightharpoonup High pull-out stoppers at the back.

#### Using both shelves:

- ► Hold the glass panel with one hand and pull it to the front.
- $\triangleright$  The glass panel Fig. 24 (1) and trim strip are at the front.
- The stops Fig. 24 (3) point down.

#### 7.4 VarioSafe

The VarioSafe provides space for compact foodstuffs and packages, pots and glasses.

#### 7.4.1 Using the VarioSafe

You can remove the drawer and slide it back in at 2 different heights. This is handy for storing taller items in the drawer.






Fig. 25

Remove the drawer.

▶ Slide back at the height you want Fig. 25 (1) or Fig. 25 (2).

## 7.4.2 Repositioning the VarioSafe

You can shift the height of the entire VarioSafe.

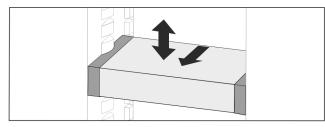


Fig. 26

- ► Pull forwards.
- ▷ Line up the side runner.
- ▶ Lift or lower to the height you want.
- ▶ Slide to the rear.

#### 7.4.3 Removing the entire VarioSafe

You can remove VarioSafe as a whole unit.

- ► Pull forwards.
- ▷ Line up the side runner.

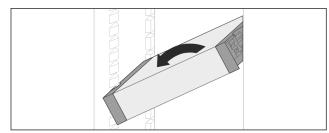


Fig. 27

▶ Tip to the side and pull towards you.

#### 7.4.4 Disassembling the VarioSafe

You can take the VarioSafe apart for cleaning.

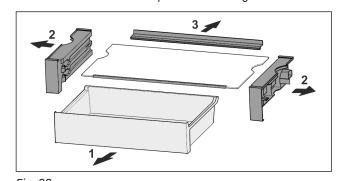


Fig. 28

► Disassembling the VarioSafe

#### 7.5 Drawers

You can remove the drawers for cleaning.

The way to remove/insert the drawers varies depending on the pull-out system. Your appliance can contain various pull-out systems.

#### Note

The energy consumption increases and the cooling power goes down if ventilation is not sufficient.

Always leave the fan air vents clear on the back wall!

#### 7.5.1 Drawer on rails

#### Removing drawer

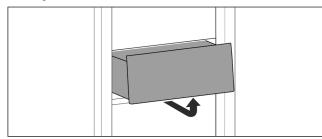


Fig. 29

▶ Remove drawer as shown in the illustration.

#### Inserting drawer

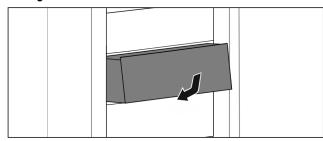


Fig. 30

► Insert drawer as shown in the illustration.

## 7.6 EasyFresh-Safe cover

You can remove the compartment cover for cleaning.

## 7.6.1 Removing the compartment cover

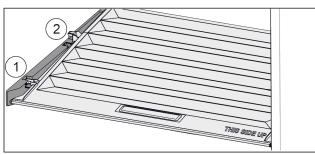


Fig. 31

When the drawers are removed:

- ▶ Pull the lid up at the front to the opening in the retaining parts Fig. 31 (1).
- ▶ Lift from the back and pull it up and out Fig. 31 (2).

#### 7.6.2 Inserting the compartment cover

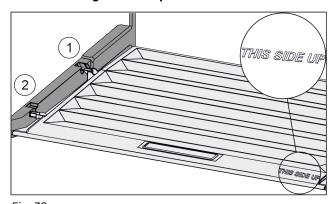


Fig. 32
If the text THIS SIDE UP points upwards:

- ▶ Insert the lip of the cover over the opening of the rear bracket *Fig. 32 (1)* and click into place *Fig. 32 (2)*.
- ▶ Position the cover where you want it (see 7.7 Adjusting the moisture levels).

## 7.7 Adjusting the moisture levels

You can adjust the moisture in the drawer yourself by adjusting the compartment cover.

The compartment lid is attached to the drawer and can be hidden by a shelf or additional drawers.

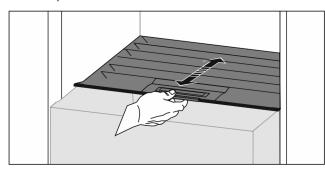


Fig. 33

#### Low air humidity

- ▶ Open the drawer.
- ► Slide the compartment cover forwards.
- > With the drawer closed: Gap between the cover and the compartment.
- > The air moisture in the Safe decreases.

#### High air moisture

- ▶ Open the drawer.
- ► Slide the cover back.
- With the drawer closed: The cover seals the compartment.
- The air moisture in the Safe increases.
  If there is too much moisture in the compartment:
- ► Choose the setting "low air moisture".

#### -or-

► Remove any excess moisture with a cloth.

#### 7.8 Glass shelves

You can remove the glass shelves under the drawers for cleaning.

#### 7.8.1 Removing / inserting the glass shelf

Make sure that the following requirements are fulfilled:

☐ Glass shelf under the drawer: The drawer has been removed. (see 7.5 Drawers)

#### Removing glass shelf

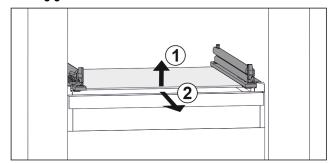


Fig. 34 Example illustration of glass shelf

- Lift glass shelf at the front. Fig. 34 (1)
- ► Take out glass shelf to the front. Fig. 34 (2)

#### Inserting glass shelf

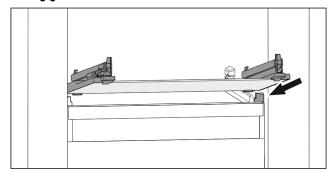


Fig. 35 Example illustration of glass shelf

- Position glass shelf at an angle behind the stoppers. (see Fig. 35)
- Lower glass shelf.
- ► Slide in glass shelf to the back.

## 7.9 Accessories

#### 7.9.1 Bottle holder

#### Using the bottle holder

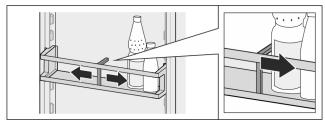


Fig. 36

- ▶ Push the bottle holder onto the bottles.
- > The bottles are prevented from falling over.

#### Removing the bottle holder

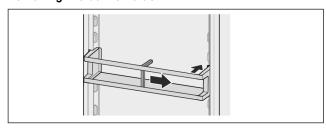


Fig. 37

- ▶ Move the bottle holder all the way to the right.
- ▶ Push the bottle holder to the back to remove.

#### 8 Maintenance

#### 8.1 FreshAir carbon filter

The FreshAir carbon filter is in the compartment above the fan.

It guarantees the best air quality.

- ☐ Replace the carbon filter every 6 months.
- When the reminder is set, a message on the display prompts you to change it.
- The carbon filter can be disposed of with the regular household waste.

#### Note

FreshAir activated charcoal filters can be purchased from the Liebherr-Hausgeräte store at home.liebherr.com/shop/de/deu/zubehor.html.

#### 8.1.1 Removing the FreshAir carbon filter

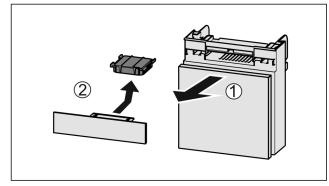


Fig. 38

- ▶ Pull out the compartment Fig. 38 (1).
- ► Remove the carbon filter Fig. 38 (2).

#### 8.1.2 Inserting the FreshAir carbon filter

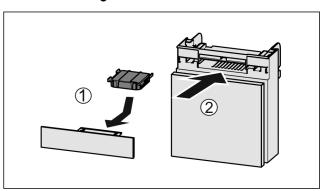


Fig. 39

- ▶ Insert the carbon filter as shown in the diagram Fig. 39 (1).
- ▶ The carbon filter clicks into place. If the carbon filter is pointing downwards:
- ▶ Push the compartment in Fig. 39 (2).
- The carbon filter is now ready for use.

## 8.2 Disassembling / assembling pullout systems

#### 8.2.1 Notes on disassembly

You can disassemble some of the pull-out systems for cleaning. Your appliance can contain a variety of pull-out systems.

The following pull-out systems can be disassembled or cannot be disassembled:

Pull-out system	can be disassembled /
	cannot be disassembled
Drawer on rails	cannot be disassembled

## 8.3 Defrosting the appliance



#### WARNING

Improper defrosting of the appliance! Injuries and damage.

- ▶ Do not use mechanical equipment or other methods to speed up the defrosting process other than those recommended by the manufacturer.
- ▶ Do not use electrical heating or steam-cleaning appliances, naked flames or defroster sprays to defrost.
- Do not use sharp objects to remove ice.

Defrosting is performed automatically. The water from the thawing process drains through the outlet and evaporates.

A layer of frost or ice can from briefly due to the energyoptimised control of the device.

► Clean the drain opening regularly (see 8.4 Cleaning the appliance).

## 8.4 Cleaning the appliance

#### 8.4.1 Ready



Danger of electric shock!

Remove the refrigerator connector or interrupt the power supply.



#### **WARNING**

Risk of fire

- Do not damage the refrigeration circuit.
- ► Empty the appliance.
- ▶ Remove mains connector.

► Activate CleaningMode. (see CleaningMode)

#### 8.4.2 Clean the housing

#### NOTICE

Improper cleaning!

Damage to the appliance.

- Only use soft cleaning cloths and ph-neutral all-purpose
- Do not uses abrasive sponges or steel wool which may cause scratches.
- Do not use any sharp or abrasive cleaning agents, nor any that contain sand, chloride or acid.



#### WARNING

Risk of injury and damage as a result of hot steam! Hot steam can lead to burns and can damage the surfaces.

- ► Do not use any steam cleaners!
- Wipe the housing down with soft, clean cloth. If very dirty, use lukewarm water with a neutral cleaner. Glass surfaces can also be cleaned with glass cleaner.

#### 8.4.3 Cleaning the interior

#### NOTICE

Improper cleaning!

Damage to the appliance.

- ▶ Only use soft cleaning cloths and ph-neutral all-purpose
- ▶ Do not uses abrasive sponges or steel wool which may cause scratches.
- Do not use any sharp or abrasive cleaning agents, nor any that contain sand, chloride or acid.
- Plastic surfaces: clean by hand with a soft clean cloth, lukewarm water and a little detergent.
- Metal surfaces: clean by hand with a soft clean cloth, lukewarm water and a little detergent.
- ▶ Drain hole: remove deposits using a thin item (for example a cotton bud).

### 8.4.4 Clean the components

#### NOTICE

Improper cleaning!

Damage to the appliance.

- Only use soft cleaning cloths and ph-neutral all-purpose cleaners.
- Do not uses abrasive sponges or steel wool which may cause scratches.
- Do not use any sharp or abrasive cleaning agents, nor any that contain sand, chloride or acid.

#### Clean with a soft, clean cloth, lukewarm water and some detergent:

- Door rack
- Shelf
- Dividing shelf
- VarioSafe
- EasyFresh-Safe cover
- Drawer

#### Wash in the dishwasher up to 60 °C:

- Bottle rack
- Holder of the dividing shelf\*
- To disassemble components: see the relevant section.
- Clean the components.

## 8.4.5 After cleaning

- Wipe the appliance and the components dry.
- Connect and switch on the appliance. The temperature is cold enough:
- ► Place the food inside.
- Repeat cleaning regularly.

## 9 Customer help

## 9.1 Technical specifications

Temperature range		
Cooling	2 °C to 9 °C	

## 9.2 Operating noises

The appliance makes different noises when it is on.

- At higher temperatures the appliance uses less energy but works for longer. It is quieter.
- At lower temperatures the food is cooled faster. It is louder.

## **Customer help**

#### Examples:

- Functions on (see 6.3 Functions)
- Fan running
- Food recently added
- · High ambient temperature
- Door open for a while

Noise		Possible cause	Type of noise	
Bubbling splashing	and	Coolant flowing into the cooling circuit.	Normal operating noise	
Hissing		Coolant sprays into the cooling circuit.		
Humming		The appliance is cooling. The volume depends on the cooling output.		
Humming rustling	and	The fan is running.	Normal operating noise	
Clicking		Components are switched on and off.		
Rattling humming	or	Valves or flaps are working.	Normal switching noise	

Noise	Possible cause	Type of noise	Lifting
Vibration	Improper setup	Defective noise	Level the appliance using the adjustable feet.
Rattling	Components, items inside the appliance	Defective noise	Secure components. Leave enough space between the items.

## 9.3 Technical fault

Your appliance is designed and built to ensure it works reliably and has a long service life. In the unlikely event that a fault occurs during operation, please check whether it is due to an operating error. If so, you will be charged for the callout and repair costs even if it falls within the warranty period.

You can fix the following faults yourself.

## 9.3.1 Appliance function

Defect	Cause	Remedy
The appliance is	→ The appliance is not switched on.	► Switch the appliance on.
not working.	→ The power plug is not properly plugged into the socket.	► Check the power plug.
	→ There is something wrong with the power outlet fuse.	► Check the fuse.
	→ Power cut	<ul> <li>▶ Keep the appliance closed.</li> <li>▶ Protecting food: Lay freezer packs on top of the food or use another freezer if the power is off for a prolonged period.</li> <li>▶ Do not re-freeze defrosted food,</li> </ul>
	→ The appliance plug does not fit the appliance properly.	► Check the appliance plug.
Temperature is not cold enough.	→ The appliance door is not closed properly.	Close the appliance door.
	→ Not enough ventilation.	► Keep ventilation grille clear, and clean it.
	→ The ambient temperature is too high.	► Solution: (see 1.3 Appliance range of use) .
	→ The appliance was opened too many times or for too long.	▶ Wait to see if the required temperature corrects itself. If not, contact Customer Service (see 9.4 Customer Services).
	→ The temperature is set incorrectly.	► Turn down the temperature and check after 24 hours.
	→ The appliance is too close to a heat source (oven, radiator, etc).	▶ Move the appliance or the heat source.
The door seal is defective or needs to be replaced for another reason.	→ The door seal can be replaced. It can be replaced without the need for special tools.	► Contact Customer Services (see 9.4 Customer Services) .

Defect	Cause	Remedy
The appliance builds up too much ice or condensation.	→ The door seal may have slipped out of its groove.	► Check that the door seal is well fitted in the groove.
The appliance is hot to touch on the outside*.	→ The heat of the refrigeration circuit is used to avoid condensation.	► This is normal.

#### 9.3.2 Features

Defect	Cause	Remedy	
The internal light	→ The appliance is not switched on.	► Switch the appliance on.	
does not come on.	→ The door was open for longer than 15 minutes.	Interior lighting turns off automatically after approx. 15 min. with the door open.	
	→ The LED interior light is faulty or the lid is damaged.	► Contact customer service (see 9.4 Customer Services) .	

#### 9.4 Customer Services

First check if you can fix the error yourself (see 9 Customer help) . If you can't, contact Customer Services.

Please refer to the enclosed "Liebherr-Service" brochure for the address.



#### WARNING

Unprofessional repair! Injuries.

- Have any repairs and action not expressly specified on the appliance and mains cable carried out by service personnel only. (see 8 Maintenance)
- ➤ A damaged mains cable may only be replaced by the manufacturer, the manufacturer's Customer Service or a similarly qualified person.
- ▶ In the case of appliances with an IEC connector, the change may be made by the customer.

#### 9.4.1 Contact Customer Services

Make sure you have the following appliance data at the ready:

- Appliance name (model and index)
- ☐ Service no. (Service)
- Serial no. (S no.)
- ▶ Look up the appliance information on the display (see Info).

-or-

- Referring to appliance info on the nameplate (see 9.5 Model plate).
- ▶ Note down the appliance information.
- Notify Customer Services of the following: Give us the appliance data.
- This will help us to provide you with a faster, more accurate service.
- Follow any further instructions given by Customer Services.

## 9.5 Model plate

The model plate is behind the drawers on the inside of the appliance.




Fig. 40

- (1) Appliance description (3) Serial no.
- (2) Service no.
- ► Note the data on the model plate.

## 10 Shutting down

- ► Empty the appliance.
- Turn off the appliance .
- ► Remove mains connector.
- Remove appliance connector if required: Remove and move from left to right at the same time.
- ► Clean the appliance (see 8.4 Cleaning the appliance).
- ▶ Leave the door open to avoid bad smells building up.

## 11 Disposal

## 11.1 Preparing appliance for disposal



Liebherr uses batteries in some of its appliances. In the EU, for environmental reasons, legislation obliges the end user to remove these batteries before disposing of old appliances. If your appliance contains batteries, a corresponding notice is attached.

## **Disposal**

Lamps

If you can remove the lamps yourself without destroying them, also remove these before disposal.

- ► Take the appliance out of operation.
- ► Appliances with batteries: remove the batteries. For description, see Maintenance chapter.
- ▶ If possible: remove lamps without destroying them.

# 11.2 Disposing of the appliance in an environmentally friendly manner



The appliance still contains valuable materials and must be disposed of separately from unsorted municipal waste.





Dispose of batteries separately from the old appliance. To do this, you can return the batteries free of charge to retailers as well as recycling centres and collection centres for recyclable materials.

Lamps

Dispose of removed lamps via the respective collection systems.



#### WARNING

Leaking coolant and oil!

Fire. The coolant contained in the appliance is eco-friendly, but also flammable. The oil contained in the appliance is flammable. Escaping coolant and oil can ignite if the concentration is high enough and in contact with an external heat source.

- ▶ Do not damage the pipelines of the coolant circuit and the compressor.
- ► Transport the appliance without damaging it.
- ▶ Dispose of batteries, lamps and the appliance according to the above specifications.



home.liebherr.com/fridge-manuals

EN fridge