






# HYDROTAP G5 CSHA CELSIUS CUBE BRUSHED NICKEL

**CHILLED**

**SPARKLING**

**HOT & AMBIENT**

**FILTERED**

**UNFILTERED**

Order Code H59787Z11AU

Zip HydroTap Design Range CELSIUS Chilled and Sparkling Filtered water, plus Hot and Cold washing up water from a single tap. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.



Manufacturing Code	H59787Z11AU
Capacity	Residential

Tap	Zip HydroTap Design Range CELSIUS CUBE Tap (Brushed Nickel)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold and Hot
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	0.18kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W280mm x D406mm x H333mm
Product Approvals	WaterMark, RCM, ARC

Wels Rating	5 Star, 5.5 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)


Installation Requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com](http://www.zipwater.com)'


Installation Detail

**Ventilation requirements** Contact your local service provider if ventilation is not suitable

**Clearance envelope**  
Position the Tap and the Command Centre as close together as possible.



200  
333  
50  
Command Centre width 50




Air outlet louvre (if required)  
Cut-out in door/wall, towards the top of the cabinet

Air inlet cut-out (required)  
Cut-out in cabinet floor


max. 43  
285  
60  
326

**HydroTap Tap options**

**Celsius Arc Tap**

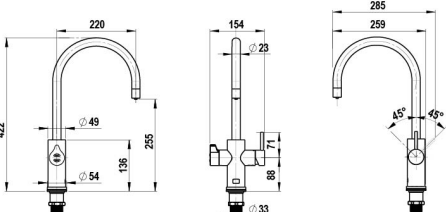


**Celsius Cube Tap**

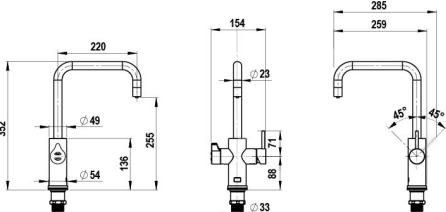

**Tap Positioning**  
Position the Tap to dispense into the sink, allowing clearance for a cup or teapot.


Ø35mm hole for Tap

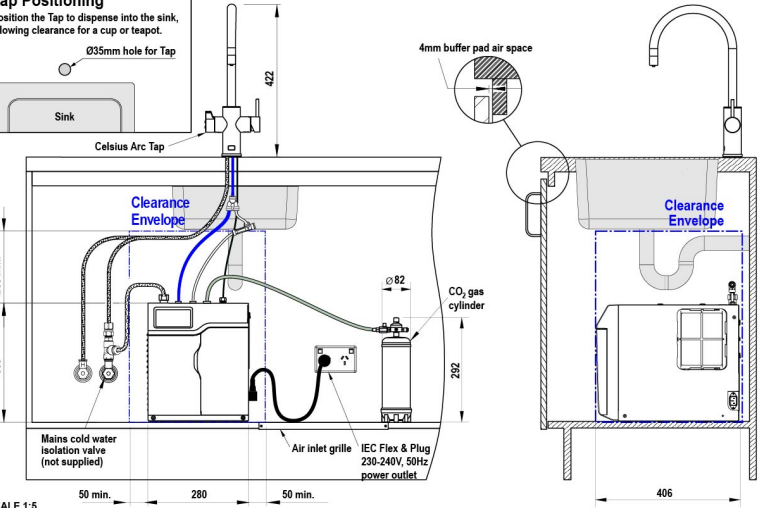

422  
200 min.  
333  
50 min.  
280  
50 min.  
406

Clearance Envelope  
4mm buffer pad air space  
CO<sub>2</sub> gas cylinder  
Air inlet grille  
IEC Flex & Plug 230-240V, 50Hz power outlet  
Mains cold water isolation valve (not supplied)

**Mains hot water supply installation**  
Hot and cold water supply required

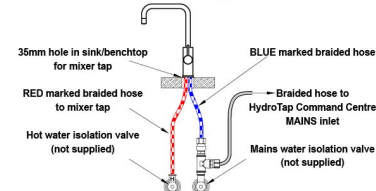

35mm hole in sink/benchtop for mixer tap  
RED marked braided hose to mixer tap  
Hot water isolation valve (not supplied)  
BLUE marked braided hose  
Braided hose to HydroTap Command Centre MAINS inlet  
Mains water isolation valve (not supplied)

**HydroTap G5 CS Home**

shown with Celsius Arc Tap

SCALE 1:5  
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

