Slideout Range Hood





The CS Series is a Built-in hood with 2 speeds. Available in 2 different sizes and anti print mark Stainless Steel panel. Incorporating easy glide telescopic rails which provide greater extraction surface.

Pictured: CS60 - 60cm Slideout Hood



Pictured: CS90 - 90cm Slideout Hood




Pictured: CS60 - 60cm Slideout Hood: under side

Slideout Range Hood CS 60 & 90



Model CS Series Slideout Hood

- Slide out range hood
- Filters: Aluminium
- Control: switch button
- Finger print proof facia
- Lighting: ECO LED
- Energy consumption per year: 44 kwh/a
- Speed levels: 2
- Max. Air flow (m3/h): 340 nett*
- Motor consumption: 100W
- Max. Noise (dB): 57
- Outlet: 120 mm with 125mm conversion
- Size: 60cm & 90cm
- Min. recommended installations height from electric cooktop: 550mm
- Min. recommended installations height from gas cooktop: 650mm
- Available Colour: stainless steel
- Easy installation kit provided
- Suitable for ducting or recirculating**

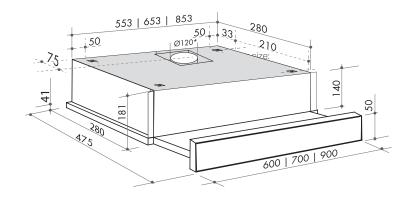

Type: Slideout Range Hood Model: CS60, & CS90 Size: 60cm, 90cm

19102016

Australia National Telephone Number 1300 MYILVE (694 583) New Zealand Telephone Number 0508 458 369 ILVE showrooms are open Tuesday - Friday from 9am-5pm and Saturdays 10am-4pm. CLOSED Monday & Sunday

ilve.com.au

NSW & ACT (Head Office) VIC & SA 48-50 Moore Street Leichhardt F 02 8569 4699

1211 Toorak Road Camberwell F 03 9809 2155

QLD 1/42 Cavendish Road Coorparoo F 07 3397 0850

WA & NT Unit 10/55 Howe Street 3 Pear Avenue Osborne Park F 08 9201 9188

TAS (Crisp Ikin) Derwent Park, 7009 P 03 6272 7386

New Zealand PO Box 11.160 Sockburn Christchurch F 03 344 5906

^{*}Range Hood extraction rate m3/h reading is measured at: 1m duct up, 1 x 90°C bend & 1m vertical duct

^{**}Optional recirculating kit and accessories are available (consult with ILVE)