

PP 63 G
PP 93 G
PP 63 G NL
PP 93 G NL
PP 63 G AT
PP 93 G AT



Istruzioni per l'uso e l'installazione
Instructions for use and installation
Instructions pour l'emploi et l'installation
Gebrauchs- und Installationsanleitungen
Instructies voor het gebruik en het installeren
Vejledning til brug og installering

Congratulations!


You have just purchased an electrical household appliance that has been made using advanced technology and quality materials. As time passes, you will appreciate its practicality and safety, which are constant features of our production.

Contents






THESE INSTRUCTIONS ARE ONLY VALID FOR THE COUNTRIES OF DESTINATION WHOSE SYMBOLS ARE SHOWN IN THE BOOKLET AND ON THE APPLIANCE RATING PLATE.

Recommendations

- 1. This appliance has been designed for private, non-professional use in normal dwellings.**
- 2. Carefully read the recommendations in this instruction booklet, as they give important advice regarding safe installation, use and maintenance. Keep this booklet in a safe place for further reference when required.**
3. After removing the packaging, check that the appliance is intact. If in doubt, do not use the appliance and contact professionally qualified personnel.
4. All installation and adjustment operations should be carried out by qualified engineers in accordance with current regulations. Specific directions are given in the "installation instructions" paragraph.
5. Periodically check the condition of the gas connection pipe and have it replaced by a qualified technician as soon as it shows any signs of wear or anomaly.
6. Under no circumstances should the user replace the power supply cable or the gas connection pipe of this appliance. In the event of damage or the necessity for replacement, only contact an authorised service centre.
7. Before connecting the appliance, make sure that the data on the rating plate (situated on the bottom part of the appliance and on the last page of the booklet) correspond to those of the mains electricity and gas supplies.
8. Check that the capacity of the electrical system and the power outlets are suitable for the maximum power of the appliance, indicated on the rating plate. If in doubt, consult a professionally qualified technician.
9. Do not leave the appliance plugged in if it is not in use. Switch off the main switch and gas supply when you are not using the hob.
10. The gas burners and pan supports remain heated for a long time after use. Take care not to touch them.
11. To avoid accidental spillage do not use cookware with uneven or deformed bottoms on the burner.
12. Never use flammable liquids such as alcohol or gasoline, etc. near the appliance when it is in use.
13. To obtain the best results with the cooktop, several fundamental rules should be followed while cooking or preparing food. Use cookware with a flat bottom to make certain that the pot sets properly on the cooking area.



Hob description

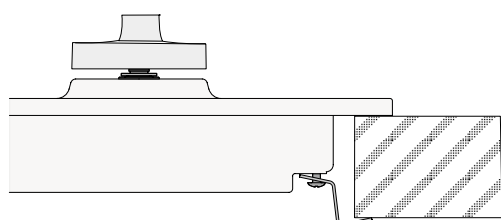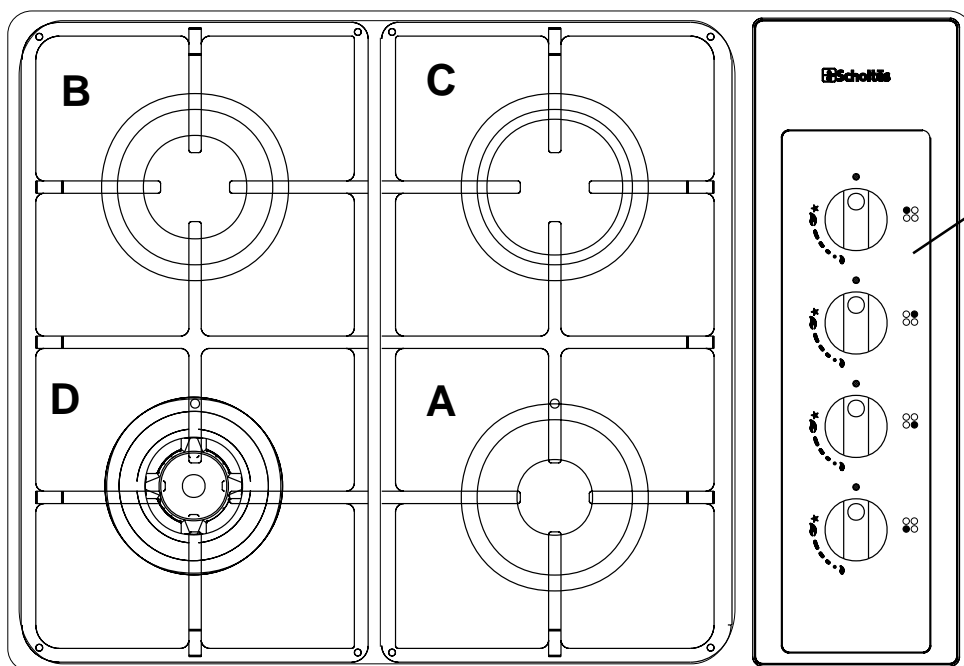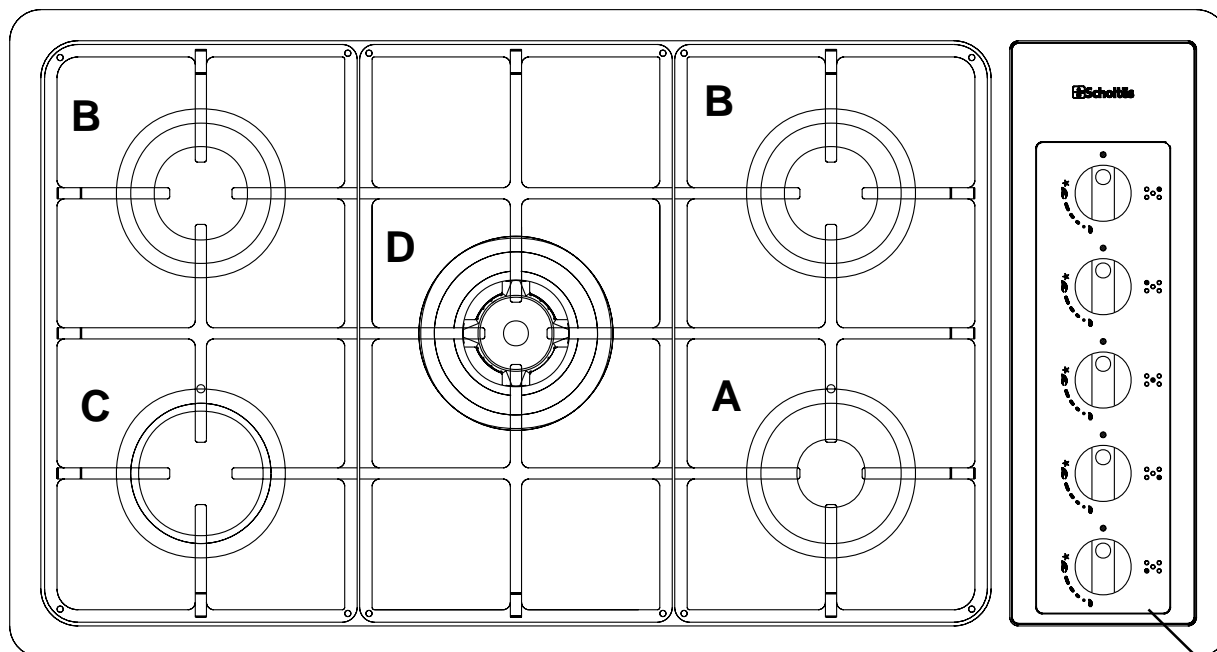



- A Auxiliary gas burner
- B Semi-rapid gas burner
- C Rapid gas-burner
- D Triple ring gas burner
- E Ignitor for gas burners
- F Safety device Activates if the flame accidentally goes out (spills, drafts, etc.), interrupting the delivery of gas to the burner.
- G Pan supports
- M Control knobs for gas burners


Instructions for use

Gas burners

The burners differ in size and power. Choose the most appropriate one for the diameter of the cookware being used.

The burner can be regulated with the corresponding control knob "M" by using one of the following settings:

Off	•
High flame	
Low flame	

The symbols  near the knobs show the position of the relative burner on the hob.

To ignite a burner proceed as follows:

- turn the relative knob counter-clockwise until the pointer is on the high-flame symbol;
- press the knob down fully to activate the automatic gas ignition;
- keep the knob pressed down for about 10 seconds with the flame lit to allow the safety thermocouple to be heated;
- release the knob, checking that the flame is stable. If it is not, repeat the operation.

For minimum power, turn the knob towards the low flame symbol. Intermediate positions are possible by putting the knob anywhere between the high and the low flame symbol. To turn off the burner, turn the knob clockwise to the off position "•".

Important:

- Do not activate the automatic ignition device for more than 15 consecutive seconds.
- Difficulty in ignition is sometimes due to air inside the gas duct.
- If a burner flame accidentally goes out, the gas continues to exit for a few moments before the safety device activates. Turn the control knob to the off position and do not attempt ignition again for at least 1 minute, thereby letting the gas disperse, which could otherwise be a danger.
- When the equipment is not in operation, check that the knobs are in the off position "•". The main gas supply cut-off cock should also be closed.

Using the burners

To obtain maximum efficiency from the burners, it is advisable to use only pans with a diameter that is suitable for the burner being used, so that the flame does not extend beyond the pan base (see following table).

When a liquid starts boiling, it is advisable to turn the flame down just enough to keep the liquid simmering.



Burners	Diameter of the pan in cm
A Auxiliary	from 6 to 14
B Semi-rapid	from 15 to 20
C Rapid	from 21 to 26
D Triple ring	from 24 to 26

Cleaning and maintenance

To ensure long life of the appliance, it is essential to carry out a thorough general clean frequently, taking into account that:

- **The appliance should be disconnected from the mains supply before starting cleaning operations.**
- Avoid cleaning appliance parts when they are still warm.
- The enamelled or chromed or glass parts must be washed with warm water without using abrasive powders or corrosive substances which could ruin them.
- The steel parts, especially in areas with the screen-printed symbols, should not be cleaned with diluents or abrasive detergents; preferably use just a soft cloth moistened with warm water and liquid detergent for washing dishes (wipe the cloth over the steel in the same direction as the satin-finish).
Denatured alcohol may be used to remove stubborn dirt. Stainless steel can be stained if it remains in contact with aggressive detergents (containing phosphorus) or water with a high lime content. After washing the stainless steel parts they should be rinsed and dried with a soft cloth (washleather).

- After cleaning, some special treatments are available to bring back the shine to steel and to prevent it from yellowing; for this purpose, we recommend you use the specific "special cream detergent for steel care" available from our Assistance Centres.
- Avoid leaving acid liquids (vinegar, lemon juice, aggressive detergents, etc.) on enamelled or painted parts.
- The removable parts of the burners should be washed frequently with warm water and soap, making sure to remove caked-on substance. Check that the gas outlet slits are not clogged. Dry the burners carefully before using them again.
- Frequently clean the end part of the automatic glow plugs of the hob.

Greasing the taps

As time passes, a tap may lock or become difficult to turn. In this case it will be necessary to clean inside and replace the grease.

This procedure must be performed by a technician authorized by the manufacturer.

INSTRUCTIONS FOR THE INSTALLER

The following instructions are provided for qualified installers so that they may accomplish installation, adjustment and technical maintenance operations correctly and in compliance with current regulations and standards.

Important: the hob should be disconnected from the mains electricity supply before any adjustment, maintenance, etc. is carried out. Maximum caution should be used whenever it is necessary to keep the appliance connected to the electricity supply.


The hobs have the following **technical characteristics**:

Category II 2H3+ Class 3

Positioning

This appliance may only be installed and operated in permanently ventilated rooms in compliance with provisions laid down by current regulations and standards. The following requirements must be observed:

- The appliance must discharge combustion products into a special hood, which must be connected to a chimney, flue pipe or directly to the outside (fig.2).
- If it is impossible to fit a hood, the use of an electric fan is permitted, either installed on a window or on an external wall, which must be switched on at the same time as the appliance.

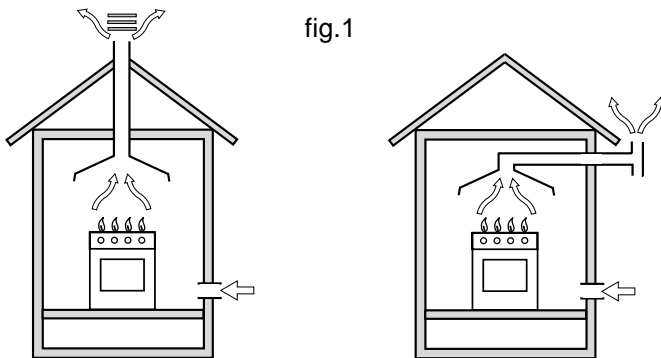

In a chimney stack or branched flue
(exclusively for cooking appliances)

Directly to the outside

Kitchen ventilation

The air flow into the room where the appliance is installed must equal the quantity of air that is required for regular combustion of the gas and for ventilating the same room. Air must be taken in naturally through permanent apertures made in the outside walls of the room or through single or branching collective ventilation ducts in compliance with the standards in force.

The air must be taken directly from the outside, from an area far from sources of pollution.

The ventilation aperture must have the following characteristics (fig.2A):

- total free cross section of passage of at least 6 cm² for every kW of rated heating capacity of the appliance, with a minimum of 100 cm² (the heating capacity is indicated on the **rating plate**);
- it must be made in such a way that the aperture, both on the inside and outside of the wall, cannot be obstructed;
- it must be protected, e.g. with grills, wire mesh, etc. in such a way that the above-mentioned free section is not reduced;
- it must be situated as near to floor level as possible.

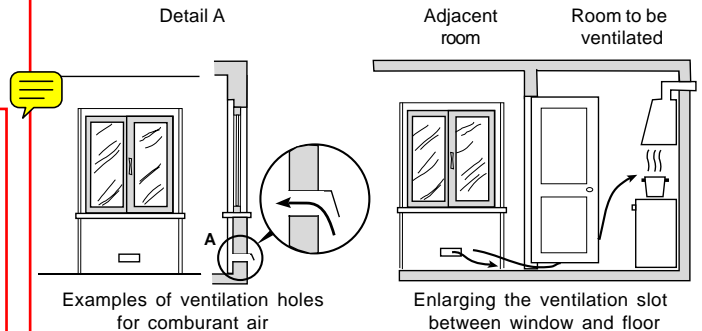


Fig. 2A

Fig. 2B

The air inflow may also be obtained from an adjoining room, provided the latter is not a bedroom or a room where there is a risk of fire, such as garages, mews, fuel stores, etc. and is ventilated in compliance with the standards in force.

Air from the adjoining room to the one to be ventilated may be made to freely pass through permanent apertures with a cross section at least equal to that indicated above. These apertures may also be obtained by increasing the gap between the door and the floor (fig.2B).

If an electric fan is used for extracting the combustion products, the ventilation aperture must be increased in relation to its maximum performance. The electric fan should have a sufficient capacity to guarantee an hourly exchange of air equal to 3-5 times the volume of the kitchen.


Prolonged, intensive use of the appliance may require extra ventilation, e.g. an open window or a more efficient ventilation system by increasing the extraction power of the electric fan if installed.

Liquid petroleum gas descends towards the floor as it is heavier than air. Apertures in the outside walls in rooms containing LPG cylinders should therefore be at floor level, in order to allow any gas from leaks to be expelled. Do not store LPG cylinders (even when empty) in basements/rooms below ground level; it is advisable to keep only the cylinder in use in the room at any one time and connected far from heat sources which could raise its temperature to above 50 °C.

Hobs installation


Suitable precautions must be taken to ensure that the installation is in compliance with current accident-prevention regulations regarding electrical and gas connections. For trouble-free operation of the appliance set into kitchen units, the minimum distances indicated in fig.3 should be complied with and the adjoining surfaces and rear wall should be capable of withstanding a surface temperature of 65 °C.

Installation of PP 63/93 G hobs combined with 60/90 cm oven.

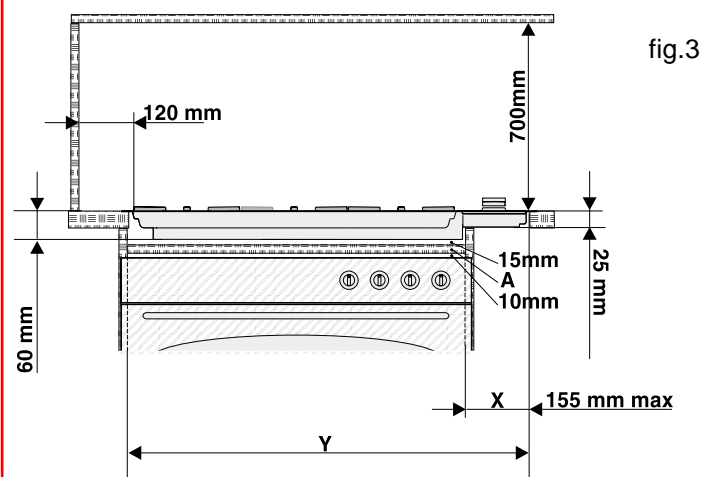

Size of cut-out for hob installation

Model	Dimensions for building-in	"Y" Minimum Dimensions	"X" Maximum Dimensions
PP 63 G	695x490	695	155
PP 93 G	948x490	948	155

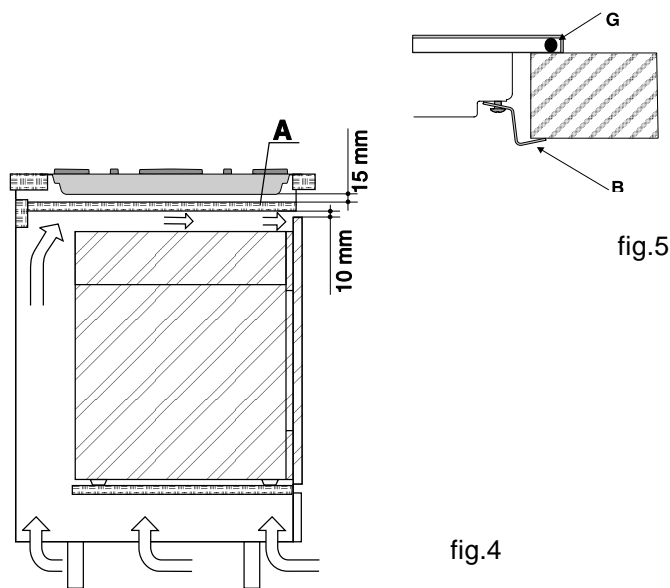

Installation above a built-in oven


Both the electricity supply cable and the gas pipe must not touch hot parts of the oven housing, in order to avoid overheating.

Suitable air vents should be provided for as shown in fig.4 (inlet at least 200 cm² from the bottom, outlet at least 60 cm² from the top part for 60 cm ovens, and at least 90 cm² for 90 cm ovens) to allow adequate ventilation inside the housing unit.

When installing above a built-under oven without forced cooling ventilation, a wooden panel "A" (fig.4) should be installed beneath the hob as insulation, positioning it at a minimum distance of 15 mm from the hob housing.

This wooden panel must be removable in order to allow for any maintenance operations beneath the hob.

If the hob is installed on a base unit with doors, hob operation is not influenced by the opening and closing of these doors.

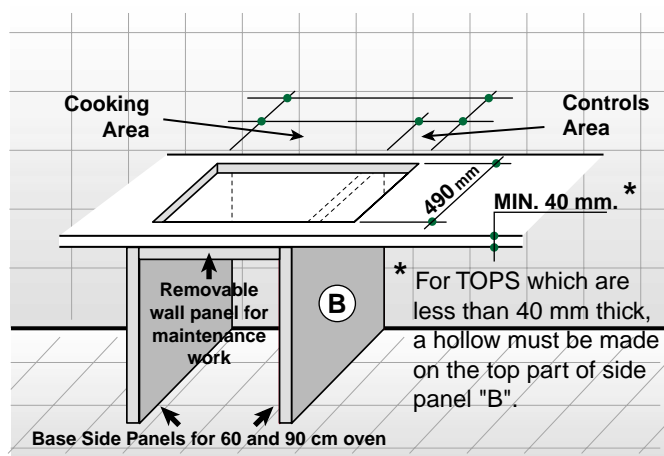

Fixing to the unit

Fix the provided sealing gasket "G" under the outer edge of the hob;

To fix hobs from the PP 63/93 G series to the unit, four brackets have been provided to fit on as indicated in fig.5 ;

Gas supply connection

- Check that the appliance is set for the type of gas available and then connect it to the mains gas piping or the gas cylinder in compliance with current regulations and standards.
- This appliance is designed and set to work with the gas indicated on the label situated on the actual hob. If the gas supply is other than the type for which the appliance has been set, proceed with replacing the corresponding nozzles (provided), following instructions given in the paragraph "Adaptation to different types of gas".
- For trouble-free operation, suitable use of energy and longer life of the appliance, make sure that the supply pressure complies with the values indicated in the table 1 "burners and nozzles specifications, otherwise install a special pressure regulator on the supply pipe in compliance with current standards and regulations.
- Connect in such a way that the appliance is subjected to no strain whatsoever.

Either a rigid metal pipe with fittings in compliance with the standards in force must be used for connecting to the nipple union (threaded ½"G male fitting) situated at the rear of the appliance to the right (fig.7), or flexible steel pipe in compliance with the standards in force, which must not exceed 2000 mm in length. Should it be necessary to turn the fitting, the gasket (supplied with the appliance) must be replaced. Upon completion of installation, check the gas circuit, the internal connections and the taps for leaks using a soapy solution (never a flame). Also check that the connecting pipe cannot come into contact with moving parts which could damage or crush it. Make sure that the natural gas pipe is adequate for a sufficient supply to the appliance when all the burners are lit

Important: A pressure regulator, in compliance with the standards in force, must be inserted when connecting to a liquid gas supply (in a cylinder).

Adaptation to a different type of gas

If the hob is to be converted for use with a type of gas other than that for which it was set in the factory (indicated on the label to be found on the hob), the burner nozzles should be replaced as follows:

- Remove the pan supports and the burners.
- Unscrew the nozzles "A" (fig.8) using a 7 mm socket wrench and replace them with the ones which have a diameter suitable for the type of gas to be used, according to the table 1 "burners and nozzles specifications).
- On completing the operation, replace the old rating label with the one showing the new type of gas; the sticker is available from our Service Centres.




fig.7

Adjusting the low flame

- Put the tap to the low flame position;
 - Remove the tap knob and turn the adjusting screw, situated inside of the tap stem (fig.9), using a screwdriver (loosening the screw increases the height of the flame, tightening decreases it).
- ~~note: the adjusting screw must be fully screwed down for liquid gas.~~
- Having obtained the low flame setting required and with the burner lit, abruptly change the position of the knob several times from minimum to maximum and check that the flame does not go out.




fig.8




fig.9

Electrical connection

THE APPLIANCE MUST BE EARTHED

The hobs are designed to work with alternating current at the supply voltage and frequency indicated on the rating plate (situated under the hob or at the end of the instruction booklet). Make sure that the local supply voltage corresponds to the voltage indicated on the rating plate.

Connecting the supply cable to the mains electricity supply

~~For models supplied without a plug, fit a standard plug, suitable for the load indicated on the rating plate, onto the cable and connect to a suitable socket.~~

To connect directly to the mains supply, a double-pole switch with a contact separation of at least 3 mm suitable for the load and complying with current standards and regulations, must be fitted between the appliance and the mains supply outlet.

The yellow-green earth wire must not be interrupted by the switch.

The supply cable must be in such a position that no part of it can reach a temperature of 50 °C above room temperature.

For installation above a built-under oven, the hob and the oven must be connected separately to the electricity supply both for safety reasons and for easy removal of the oven if necessary.

Do not use adapters or shunts as they could cause heating

or burning.

Before connecting to the power supply, make sure that:

- the limiter valve and the domestic system can withstand the load from the appliance (**see rating plate**);
- the supply system is efficiently earthed according to standards and laws in force;
- the socket or double-pole switch are easily accessible when the appliance is installed.

Important: the wires in the mains lead are coloured in accordance with the following code:

Green & Yellow

- **Earth**


Blue

- **Neutral**

Brown

- **Live**

As the colours of the wires in the mains lead may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:

Connect the Green & Yellow wire to terminal marked “E” or  or coloured Green or Green & Yellow.

Connect the Brown wire to the terminal marked “L” or coloured Red.

Connect the Blue wire to the terminal marked “N” or coloured Black.

FAILURE TO OBSERVE THE ACCIDENT-PREVENTION REGULATIONS RELIEVES THE MANUFACTURER OF ALL LIABILITY.

Replacing the cable

Use a rubber cable of the type H05RR-F with a suitable cross section 3 x 0.75 mm².

The yellow-green earth wire must be 2-3 cm longer than the other wires.

Burners and nozzles specifications

Table 1

Burner	Diameter (mm)	Thermal power kW (H.s.*)		Liquid gas				Natural gas	
				By-pass 1/100	Injector 1/100	Flow *		Injector 1/100	Flow*
		Nomin.	Reduc.	(mm)	(mm)	G30	G31	(mm)	l/h
Rapid C	100	3.00	0.7	40	86	218	214	116	286
Semi-rapid B	75	1.65	0.4	30	64	120	118	96	157
Auxiliary A	55	1.00	0.3	27	50	73	71	71	95
Triple ring D	130	3.25	1.3	57	91	236	232	124	309
Supply pressure						28-30	37		20

* At 15°C and 1013 mbar-dry gas
Propane G31 H.s. = 50,37 MJ/kg
Butane G30 H.s. = 49,47 MJ/kg
Methane G20 H.s. = 37,78 MJ/m³

This appliance conforms with the following European Economic Community directives:

- 73/23/EEC of 19/02/73 (Low Voltage) and subsequent modifications;
- 89/336/EEC of 03/05/89 (Electromagnetic Compatibility) and subsequent modifications;
- 90/396/EEC of 29/06/90 (Gas) and subsequent modifications;
- 93/68/EEC of 22/07/93 and subsequent modifications.



Indesit Company

Viale Aristide Merloni, 47
60044 Fabriano (AN) Italy
Tel. +39 0732 6611
www.scholtes.com

This document is printed by
Xerox Business Service - Docutech - 01/2005
Document number: **195034742.04**

Conformément à nos conditions générales de vente, nous nous réservons la faculté de modifier nos modèles sans préavis: et cette brochure ne peut être considérée comme un document contractuel.

In conformity with our general conditions of sale, we reserve the right to modify our models without notice and this booklet can in no way be considered as a binding document.

Overenkomstig onze verkoopvoorwaarden behouden wij ons het recht voor onze modellen zondervoorafgaande kennisgeving te wijzigen: dit boekje kan niet als een contractueel document worden beschouwd.

Conformemente alle nostre condizioni generali di vendita, ci riserviamo la facoltà di modificare i nostri modelli senza preavviso. Questo opuscolo non può essere considerato come un documento contrattuale.
