

# P70/2 rangehood

ID030608  
code 2584

70cm wide, built-in, concealed canopy



FINISH	satin stainless steel
SIZE	70cm
INSTALLATION	built into overhead cabinetry — corner, wall, island
CAPACITY	380 <sup>3</sup> m/hr net
AIR EXTRACTION	duct direct to atmosphere or recirculate to kitchen, 125mm ducting required
NOISE RATING	43–55 dBA
ILLUMINATION	two x 20 watt recessed halogen
FILTER	stainless steel/aluminium grease filters, removable and washable
ACCESSORY	optional activated charcoal filter pair for recirculation, part number D210CF2
WARRANTY	two years parts and labour

## APPLICATION

The P70/2 extraction/filtering unit is suitable for very varied installations. An island or wall-mounted canopy can be designed incorporating these rangehoods. Consider, as well, one of these units for a difficult situation such as a corner or, when renovating, the overhead cabinet gaps where a normal 90cm wide rangehood is impracticable.

## PERFORMANCE

Highly-efficient air extraction of up to 380 cubic metres an hour true (net) ensures the very swift removal of cooking vapours, odours and heat. The higher speed selections are perfect for the more vigorous styles of cooking such as stir frying, griddle cooking and boiling, the lower speeds at the touch of a button are perfect for simmers.

## QUIETNESS

43 to 55 dBA. The motor/impellor encasements are smooth-walled to minimise air drag and, hence, noise. All metal joints are welded to reduce vibration.

## SAFETY

Thermal overload protection on motor, fire retardant hardened metal and mesh, VO self-extinguishing plastic for motor housing and internal flue.

## MAINTENANCE

No tools required — easy lift-out pair of grease filters for washing. For light replacement, simply rotate the decorative flange for access to halogen globes.

## DUCTING

Direct ducting to atmosphere ensures the maximum removal of grease/oil/particle-laden vapour plus the odours and, very importantly, the heat, resulting in a cleaner, cooler, more comfortable work area.

## RECIRCULATION

When the cooking vapours cannot be ducted to atmosphere, the filtered air can simply be redirected back into the kitchen via a duct pipe through the overhead cabinetry.

## CHARCOAL FILTERS


These are purchasable accessories. One each is clipped to either side of the centrifugal motor and are designed to absorb and diminish cooking odours. Periodic inspection is recommended before replacement. They are optionally used for recirculation only. The activated charcoal filters are not to be washed.

A 123mm diameter collar at the air exit aperture fits 125mm diameter duct, whether it be galvanised sheet metal piping, high temperature rated PVC or flexible tubing.


# P70/2 rangehood

ID030608  
code 2584


70cm wide, built-in, concealed canopy

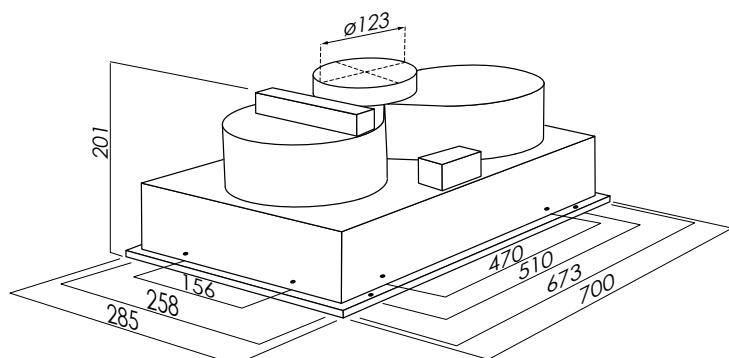

PLEASE NOTE: minimum separation between underside of rangehood and cooktop heating surface, ie gas flame aperture, electric element, ceramic —  
above gas/multifuel hob: 650mm minimum  
above electric hob: 600mm minimum

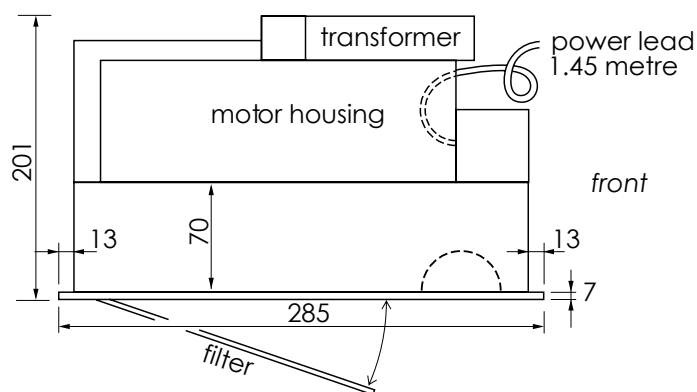


SIDE ELEVATION

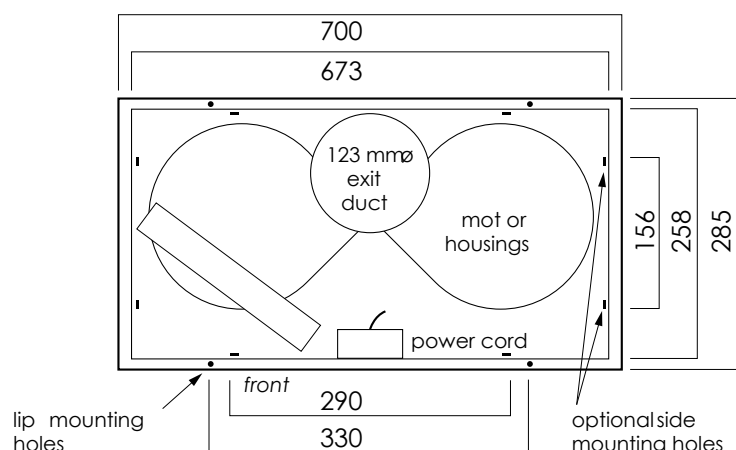

PLAN

<b>dimensions</b>	201mm H x 700mm W x 285mm D
<b>packaged</b>	740 x 250 x 320 = 0.06m <sup>3</sup>
<b>net weight</b>	7.4kg
<b>gross weight</b>	9.4kg
<b>air extraction</b>	380 <sup>3</sup> m/hr max net
<b>noise</b>	speed 1 (low) 43 dBA speed 3 (high) 55 dBA
<b>air exit aperture</b>	123mm diameter
<b>duct size</b>	125mm diameter
<b>electricity supply</b>	240 volt 50 Hz
<b>electrical connection</b>	connected power cord with 3-pin plug suitable for standard 10 amp GPO
<b>power cord length</b>	1.45 metre
<b>motor</b>	2 x single shaded pole with 1.2 impeller, 2 x 100 watt
<b>illumination</b>	2 x 40 watt halogen
<b>maximum current</b>	1.0 amp
<b>supplied</b>	<ul style="list-style-type: none"> <li>instructions for installation, operation and maintenance</li> <li>one-way butterfly valve fitted to exit collar (removable)</li> </ul>
<b>optional</b>	pair of activated charcoal filters for optional use when recirculating, pair code D210CF2

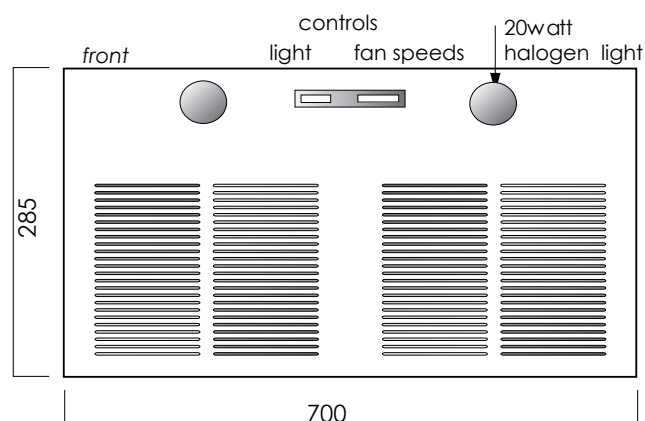

UNDERSIDE DETAIL

**NB: drawings are not to scale — they are to assist only**

WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.