

DBI654IBXXLS

General description

Turbo Drying™ - Fan assisted moist air extraction
 Style
 Installation type: Built under work top
 Size: XXL, 86 cm
 Number of baskets: 3
 15 place settings
 8 Steel™ Construction, SCS+ (Super Cleaning System+)
 Cutlery Flexi Tray with Instant Lift™
 Upper rack type: Premium - two foldable wine shelves, fixed pin rows and one foldable glass support
 Lower rack type: Premium - foldable pin rows
 Cutlery basket

Construction & Performance

8 Steel™ construction
 Hidden heater
 SCS+ (Super Cleaning System+)
 Sensi Clean™ Sensor - detects the dirtiness level
 Number of spray arms: 3
 Number of spray zones: 9
 Jet Spray™ - extra dishwashing power for tall objects
 Wide Spray™ - extra washing power for pots and pans
 Power Zone™ for the cutlery basket

Use & Flexibility

15 place settings
 Basket class: Premium
 Number of basket levels: 3
 Cutlery Flexi Tray with Instant Lift™
 Height adjustable upper basket
 Easy sliding telescope rails with ball bearings for the upper basket
 Dense basket wiring in both upper and lower basket
 Easy-to-use cutlery basket
 Internal LED light

Interaction & Control

Display type: LCD display
 Program names in full text
 Number of programs: 13
 Number of options: 4
 Delayed start: Variable start delay up to 24 hours
 Status LED light
 Digital countdown indicator
 Display and sound feedback settings

Programs, options and modes


13 programs: Auto wash; Eco wash; Hygiene wash; Time program; Plastic wash; Heavy wash; Rinse and hold; Sanitation wash; Upper half wash; Lower half wash; Crystal glass; Quick Pro wash; Self-cleaning
 High temperature
 Extra dry
 Variable start delay up to 24 hours
 Super rinse
 Time set
 Green mode
 Speed mode
 Night mode
 Intensive mode

Design & Integration

Kick plate adjustable depth: 30-94 mm
 From front adjustable rear foot
 Integrated anti-siphon device
 Niche dimensions (HxWxD): 86 x 60 x 56 cm

Safety & Maintenance

Aqua Safe™
 Kid Safe™ - panel
 Rinse-aid indication: Notification in display
 Stand by water protection
 Exterior float
 Anti block drain pump

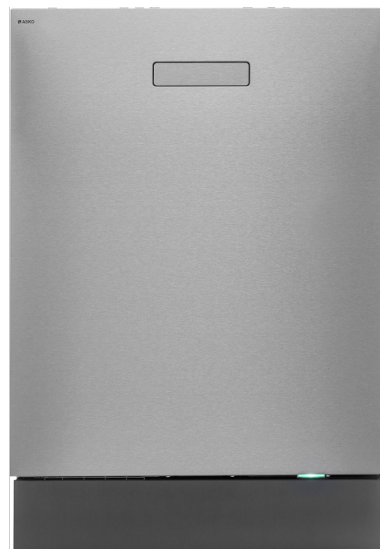

Technical data

Size: 3/4" Can be connected to hot or cold water
 Max. temperature of inflow water: 70 °C
 Noise level: 42 dB(A)
 Reference program: 1
 Total cycle time of reference program (min): 170 min
 Estimated yearly energy consumption: 295 kWh
 Energy consumption reference program: 0,79 kWh
 Energy stars: 3,5
 Water stars: 5
 Water consumption: 12,2 l
 Consumption in off mode: 0,49 W
 Consumption in standby mode: 0,49 W
 Plug type: Australian
 Connection rating: 2000 W
 Voltage: 220-240 V
 Number of phases: 1
 Current: 10 amp
 Frequency: 50 Hz
 Required inlet water pressure: 0,03-1 MPa
 Net weight: 47 kg
 Yes
 Yes

Dimensions

Product dimensions (HxWxD): 85,9 x 59,6 x 55,9 cm
 Depth with door open: 1238 mm
 Length electrical cord: 1,825 m
 Length inlet hose: 163 cm
 Length outlet hose: 200 cm

Logistic information

Dimensions of packed product (HxWxD): 93 x 64 x 68 cm
 Gross weight: 50,6 kg
 Product code: 729068