
78cm Induction Cooktop




ILD786G5



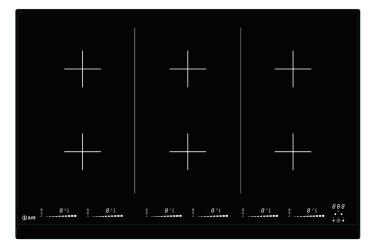

ILVE's induction cooktops are for people who have been thinking about upgrading their cooktop at home but aren't able go gas, ILVE's induction systems are the ultimate alternative.

Unlike normal electric cooktops, induction technology produces heat by creating a magnetic field which generates heat directly to the cooking vessel. This means that the heat is instantaneous, temperature control is immediate and the heat is evenly spread over the bottom of the pan, meaning no more annoying hot or cold spots, the ILVE induction elements also include booster zones to minimize heat up times even further.

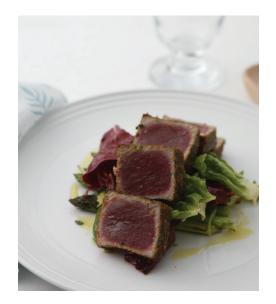





78cm Induction Cooktop




ILD786G5

Model ILD786G5 **Induction Cooktop**

- Designed for simple operation
- · KeraBlack+ glass with Beveled edges: 33mm front & 5mm on the sides
- Slider touch control with direct access to 11 heating levels (0-9 + Booster and double Booster)
- · Auto pan detection
- White display
- Capacitive technology
- Ergonomic central position allows more space for the pots
- · 6 boosters and 6 double boosters, 6 timers, egg-timer
- Bridge function, 3 auto-regulated temperatures (42°C, 70°C, 93°C)
- Standby consumption < 0,5W
- 'Stop & Go' feature
- ECO-modus (to reach the chosen heat level using optimised power)
- · Child lock
- · 6 residual heat indicators
- · Long-life Thermostated Cooling an
- Auto-Power (heating area and delivered power adapt themselves to the pot being used)
- · Auto-Stop (in case of accidental start, long absence, overflow or over-temperature)
- Fast heat-up time

Ø serigraphy	Ø inductor	"9"*	Boosters*
-	220x180 mm	2100 W	2600 / 3700 W
	220x180 mm	2100 W	2600 / 3700 W
	220x180 mm	2100 W	2600 / 3700 W
	220x180 mm	2100 W	2600 / 3700 W
	220x180 mm	2100 W	2600 / 3700 W
	220x180 mm	2100 W	2600 / 3700 W
	0.,	- 220x180 mm 220x180 mm 220x180 mm 220x180 mm 220x180 mm	- 220x180 mm 2100 W 220x180 mm 2100 W 220x180 mm 2100 W 220x180 mm 2100 W 220x180 mm 2100 W





Model ILD786G5 Induction Hob

Cut out (LxD): 750 x 490mm thickness 48 mm + 4mm glass Size (LxD): 780 x 520 mm, R=5 Electrical network 220-240 V, 50/60 Hz Total Electrical Consumption: 11.1kW/h

For installation specifications, please colsult with ILVE. For optimum installation, we recommend using the actual product as the best guide.

18112016

Australia National Telephone Number 1300 MYILVE (694 583) New Zealand Telephone Number 0508 458 369 ILVE showrooms are open Tuesday - Friday from 9am-5pm and Saturdays 10am-4pm. CLOSED Monday & Sunday

ilve.com.au

NSW & ACT (Head Office) VIC & SA 48-50 Moore Street Leichhardt F 02 8569 4699

1211 Toorak Road Camberwell F 03 9809 2155

OI D 1/42 Cavendish Road Coorparoo F 07 3397 0850

WA & NT Unit 10/55 Howe Street Osborne Park F 08 9201 9188

TAS (Crisp Ikin) 3 Pear Avenue Derwent Park, 7009 P 03 6272 7386

New Zealand PO Box 11.160 Sockburn Christchurch F 03 344 5906