


Omega 52cm undermount rangehood with halogen lights, 783m³/hr maximum airflow, high air extraction and stainless steel finish.

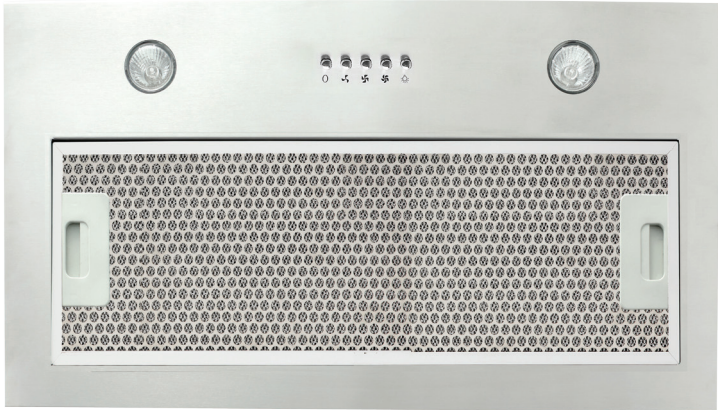


Technical details

Profile type:	Undermount
Size:	52cm
Installation type:	Built into overhead cabinetry
Airflow:	783m ³ /hr
Number of motors:	1
Watts of motor:	265W
Speeds:	3
Carbon filter:	No
Filtration:	1 aluminium, removable and washable filters
Lighting:	2 x 40W halogen
Noise level (DB):	65dBA
Air extraction:	Ducted
Maximum current:	10amps 3 pin plug
Connection:	240V, 50Hz
Warranty:	24 months parts and labour

Aesthetics

Finish:	Stainless steel
Front rail:	No
Extension flue:	No
Control type:	Backlit push buttons

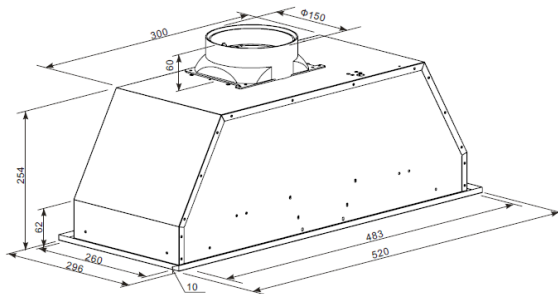

Dimensions/weight

Overall dimensions (mm):	254h x 520w x 296d (+60h for flue connection)
Chimney height (mm):	N/A
Flue diameter:	150mm
Weight:	7.5kg



HIGH AIR FLOW

Key features	Benefits
High air flow	Omega high air extraction rangehoods typically draw more than 780m ³ of air per hour keeping your kitchen smoke free.
Concealed under cupboards	This appliance will be concealed and look streamline under cupboards, perfect for small kitchens.
Washable filters	These removable washable filters are easy to maintain and keep clean.

NB: Drawings are not to scale - they are to assist only. WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cut-outs for appliances should only be by physical product measurements. The above information is indicative only.