


V-ZUG Ltd

Industriestrasse 66, P.O.Box, 6302 Zug/Switzerland

Phone +41 58 767 67 67, Fax +41 58 767 61 67

info@vzug.com, www.vzug.com

Brochure GKD46TIM

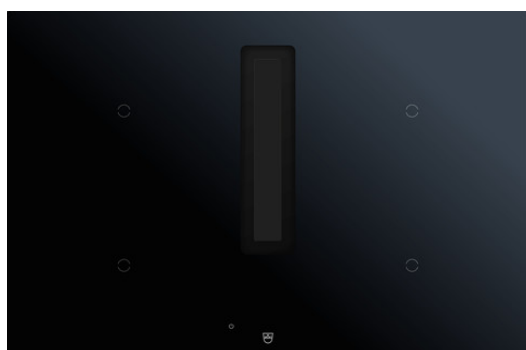

Selected appliance

- Article no.: 3109400415
- EAN code: 7630029428931
- Controls: TouchControl
- Hero-Name: Fusion
- OptiGlass
- OptiLink
- Standard width: 80.0 cm
- Extracted air
- Front design: Black design
- Frame: DualDesign

Details GKD46TIMAS

Design

- Controls: TouchControl
- Hero-Name: Fusion
- OptiGlass
- OptiLink
- Standard width: 80.0 cm
- Extracted air
- Front design: Black design
- Frame: DualDesign

Dimensions

- Cut-out height: 8.5 mm
- Cut-out radius: 5 mm
- Appliance height: 206 mm
- Appliance width: 761 mm
- Appliance depth: 501 mm
- Appliance corner radius: 1.5 mm
- Support size width: 750 mm
- Max. support size width: 750 mm
- Support size depth: 490 mm
- Max. support size depth: 490 mm
- Installation height when flush-fitted: 206 mm
- Installation height when surface-mounted: 202 mm
- Cut-out width when flush-mounted: 767 mm
- Cut-out width when surface-mounted: 750 mm
- Max. cut-out width when surface-mounted: 750 mm
- Cut-out depth when flush-mounted: 507 mm
- Cut-out depth when surface-mounted: 490 mm
- Max. cut-out depth when surface-mounted: 490 mm
- Empty weight: 23.5 kg
- Cooking zone 1 position: front left
- Cooking zone 1 dimensions: 18 cm
- Cooking zone 2 dimensions: 21 cm
- Cooking zone 3 dimensions: 21 cm
- Cooking zone 4 dimensions: 18 cm

Display and operation

- Display: Graphic touch display

- Controls: TouchControl
- Operating time
- Number of languages in display: 9
- Languages in display: de, fr, it, en GB, tr, ru, zh
- Button sound (on/off)

Energy

- Energy efficiency rating: B
- Annual energy consumption: 50.2 kWh
- Fluid dynamic efficiency: 25.9
- Fluid dynamic efficiency rating: B
- Cooking zone 1 max. power: 3000 W
- Cooking zone 2 max. power: 3500 W
- Cooking zone 3 max. power: 3700 W
- Cooking zone 4 max. power: 3000 W
- Type of connection: 400V 2N~
- Type of connection: 220-240V~
- Frequency (1): 50/60Hz
- Frequency (2): 50/60Hz
- Connected loads: 7.4 kW
- Connected loads: 7.4 kW
- Fuse protection: 16 A
- Fuse protection: 32 A
- Plug type: cable

Hob features

- OptiGlass
- Powerplus: 4
- Power-Tronic: 0
- Hob category: Induction with integrated range hood
- Operating time with shut-down function
- Residual heat indicator
- Timer
- Cooking zones: 4
- Power levels: 9 + i
- Heating technology: induction cooking zones

Range hood features

- Extracted air noise level, max. setting: 60 dB(A)
- Power levels: 9 + i

Functions

- Heating function
- Childproof lock
- OptiLink
- Pause button
- Warming function
- Automatic warm-up function
- TemperatureControl
- Cleaning lock
- Melt function
- Simmer function
- Safety package
- Pan detection (10–22 cm)

Additional data

- Recirculation air noise output, intensive setting: 75 dB(A)
- Recirculation air noise output, max. setting: 66 dB(A)
- Grease absorption capacity rating: C
- Extracted air output, intensive setting: 582.8 m³/h
- Extracted air output, max. setting: 371 m³/h
- Extracted air output, min. setting: 66 m³/h
- Extracted air noise output, intensive setting: 68 dB(A)
- Extracted air noise level, max. setting: 60 dB(A)
- Extracted air noise output, min. setting: 28 dB(A)
- Recirculation air output, intensive setting: 521 m³/h
- Recirculation air output, max. setting: 350 m³/h
- Recirculation air output, min. setting: 16 m³/h
- Feature level: 4

Service and interfaces

- Warranty: 2 years