



# B-4000

## Instant Boiling and Ambient Filtered Water System



Dual temp dispenser pictured on optional Font



Underbench boiling and ambient module



Standard dual temp dispenser

### Benefits

- Boiling and ambient water at the touch of a lever
- No cupboard ventilation required
- Concealed Safety Switch
- Unique Splash Free technology
- Lowest energy consumption
- Smallest Unit Footprint
- Works with Billi Font for flexible positioning
- Water within 1 degree of boiling
- Australian owned, designed and manufactured.

**Billi**  
HOME

Billi Pty Ltd

42 Lucknow Crescent

Thomastown Victoria 3074 Australia

Telephone +613 9469 0400

Facsimile +613 9649 0400

Website [www.billi.com.au](http://www.billi.com.au)

As Billi Pty Ltd has a policy of continual improvement,  
all details are subject to change without notice.  
All goods sold are subject to our standard terms and conditions.

# B-4000

## Data Sheet

### Instant Boiling and Ambient Filtered Drinking Water

#### Specification and model selection guide

Product Number	Model Name	Initial Cup Delivery	Boiling Water Delivery (Cups per hour)	height mm	width mm	depth mm
914000	B-4000	10	60	340	180	360

#### Water supply

A single 15mm (1/2") stop-tap with a male thread should be installed in an easily accessible position. The water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa.

#### Power supply

A standard 10 amp power outlet is required in the cupboard area where the unit is to be installed. All B-4000 models are supplied with a 1 metre flex cord and plug.

#### Warranty

All components of the B-4000 are covered by a 24-month\* warranty. Filter cartridges are a consumable and are not covered by warranty, as water conditions and usage vary.

\* 24-month warranty dependant on installation by Billi service technician.

#### Disability Conscious design

Designed for all users, the B-4000's lever operations meet current Australian Standards relating to access for people with a disability.

#### Technical Advice

Contact Billi Pty Ltd on 1300 300 316

1 cup =170ml. Based on the initial number of cups of chilled water immediately available, drawn at one cup every 10 seconds. Consideration may be need for usage patterns and draw off methods.

#### Options and accessories

— Finishes: Standard finish for the B-4000 dispenser is bright chrome. Optional Finishes—Brushed chrome or black chrome.

— Billi Font: Allows the B-4000 to be located away from sink areas and is finished in polished stainless steel.

— Dispenser Riser: 65mm dispenser extension. Supplied standard with the Billi Font.

— Tubing extension kit: Allows the dispenser to be offset from the under-bench unit.

#### Leakguard detection system


With the B-4000, there is no need to worry about water leakages. To ensure peace of mind, a watertight base tray and water detection system have been incorporated into the system's design. If a water leakage should occur, the water supply is instantly shut off.

#### Easy installation

The B-4000 Dispenser features a unique top-mounting system, making it simple to install. There is no need to reach up behind sink bowls to secure clamps or tubes—the 'snap-fit' base is secured into the mounting hole, pipe work is fed through from the top and the dispenser securely clips into place.

#### Certifications

Every Billi drinking water appliance is manufactured under a certified quality control system. The B-4000 has been tested and complies with all required standards, including: Water-mark Licence Number 21525; tested to AS3498 and AS/NZS4020; Victorian Electrical Safety Act 1998 Approval Number CSI00600V; AS/NZS ISO 9002 Certificate Number QEC 11627; C-Tick approved; complies with AS1428 requirements for access for the disabled. Electrical Compliance Number CS100600V.

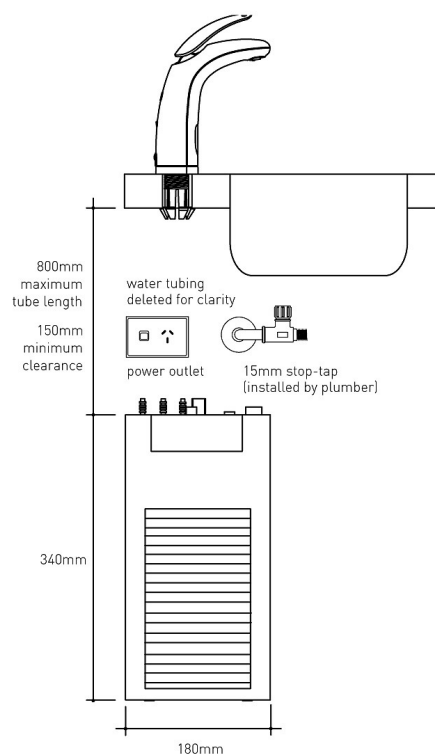

Preferred installation layout