


Description: **ROBINHOOD SLIDEOUT**  
Model Number: **RI6SS, RI6WH, RI9SS, RI9WH, RI61SS/WH**

## Typical design

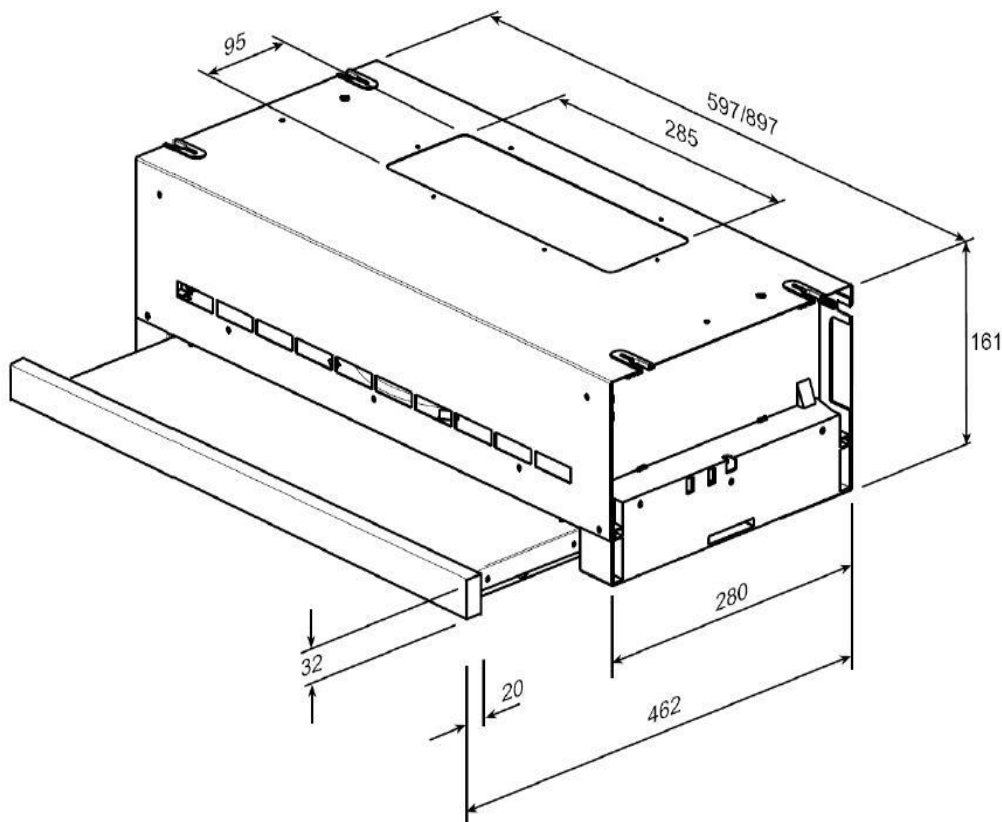

## Features and benefits

- **High performance extraction fan**  
High performance extraction fan rapidly removes steam, smoke and cooking smells from your kitchen. Three-speed switch lets you select the fan strength you need – half strength for steamed vegetables; full strength for stir fries.
- **Halogen lamps**  
50 watt halogen lamps illuminate the entire cooking surface. Lamps are quick and easy to replace.
- **Multi-layered micromesh filters**  
Multi-layered micromesh filters effectively trap grease. They're simple to remove and are easily maintained with a regular clean in the dishwasher.
- **Rectilinear design**  
Simple styling makes cleaning easy. High quality stainless steel or powder coated steel and the fingertip controls are easy to clean with a damp cloth.
- **Thermal overload switch**  
Thermal overload function that senses extreme heat and disconnects power to the motor temporarily. If you have a cooking disaster, and something catches fire, the rangehood automatically switches off to prevent flames and sparks being sucked into the ducting or ceiling.
- **Recirculation option**  
In situations where ducting isn't possible, your rangehood can be fitted with charcoal filters that effectively cleanse the air before returning it to the kitchen.

## Specifications

### Technical data:

- 3 speed centrifugal motor
- 2 x 50 Watt halogen lamps
- Gauge of steel: 0.6 mm
- Type of steel: panel steel
- Finish of steel (RI6SS, RI9SS): powder coated matt black body, stainless steel handle
- Finish of steel (RI6WH, RI9WH): powder coated appliance white
- 230-240 Volt. 50 Hertz. 165 Watt Max.
- Tested to EMC AS/NZS4417
- Electrical approval: AS3310-1992
- Performance tested to IEC61591
- Filter specifications: three layered micro mesh
- Length of power cord: 1200mm
- Ducting outlet: 285 x 95mm top or rear
- Recirculation option through front grille

**Gross weight:** 6.5kg (600 model), 8.7kg (900 model)

**Carton volume:** 0.044m<sup>3</sup> (600 model), 0.064m<sup>3</sup> (900 model)

**Carton dimensions :** 340 x 200 x 640mm (600 model), 340 x 200 x 935mm (900 model)

**Rangehood dimensions:** 280 x 161 x 597mm (600 model), 280 x 161 x 897mm (900 model)

### Performance data:

<b>Gross</b>	426m <sup>3</sup> /hr
<b>Nett Fan speed 1</b>	263m <sup>3</sup> /hr
<b>Nett Fan speed 2</b>	327m <sup>3</sup> /hr
<b>Nett Fan speed 3</b>	402m <sup>3</sup> /hr
<b>Noise speed 1</b>	52dB
<b>Noise speed 2</b>	57dB
<b>Noise speed 3</b>	61dB

#### New Zealand

Monaco Corporation Ltd  
Telephone: (09) 415 6000  
Facsimile: (09) 415 7400  
Email: [enquiries@robinhood.co.nz](mailto:enquiries@robinhood.co.nz)  
[www.robinhood.co.nz](http://www.robinhood.co.nz)

#### Australia

Shriro Australia Pty Ltd  
ABN 28 002 386 129  
Telephone: 1800 648 556  
Facsimile: 1800 628 577  
Email: [enquiries@robinhood.com.au](mailto:enquiries@robinhood.com.au)  
[www.robinhood.com.au](http://www.robinhood.com.au)

