



BEVERAGE COOLER

EBC600SX1

EURO APPLIANCES BY EUROSTYLE GROUP

Warning

The information in this document is subject to modification without any prior notice.

This beverage cooler is recommended for indoor use. It's only used for storage of beers and beverages.

Euro Appliances offers no guarantee for our beverage cooler if it is being used for any purpose other than that for which it was specially designed. Euro Appliances cannot be held responsible for any error in this manual. Euro Appliances is not responsible or liable for any spoilage or damage to beverages or any other contents incidental or consequential to possible defects of the beverage cooler. Warranty applies to the beverage cooler only and not to the contents of the beverage cooler.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure they do not play with the appliance.

Allow 24 hours before switching on the beverage cooler. During this time we recommend that you leave the door open to clear any residual odours.

Before loading & plugging in the beverage cooler, we recommend the location you should have selected for your wine cooler should:

- Be unencumbered and well ventilated;
- Be well away from any heat source and direct sunlight;
- Not be too damp (laundry, pantry, bathroom, garage and basement etc.);
- Have a flat floor and place on a dry level surface;

- Have a standard and reliable electricity supply(standard socket to country standards, linked to the ground),it is not recommended to use a multi-socket or extension lead;
- Have a surge protector fitted to the electrical outlet
- Away from microwave. Certain microwave ovens do not have wave interference shield. When place within 1 meter vicinity of the beverage cooler, they may affect the operation of the beverage cooler.

The beverage cooler should be placed where the ambient temperature is between 5 °C to 38 °C. If the ambient temperature is above or below this range, the performance of the unit may be affected. Placing your unit in extreme cold or hot conditions may cause interior temperatures to fluctuate; the idea range of temperature may not be reached.

***Grounding Instructions**

The beverage cooler must be grounded in case of an electrical short circuit. Grounding reduces the risk of electrical shock. The beverage cooler is equipped with a power cord having a grounding wire and plug. The beverage cooler plug must be plugged into properly installed and grounded electrical outlet. In locations where there is frequent lightening, it is advisable to use surge protectors.

Improper use of the grounding plug can result in the risk of electric shock. Consult a qualified electrician or service person if the grounding instructions are not completely understood. If the supplied power cord is damaged, it must be replaced by a qualified person in order to avoid electrical hazard.

***Installing your wine cooler**

Unpack and remove all of the protection and adhesive strips from the packaging around and inside the beverage cooler. ***Important: Before connecting the unit to a power source, please let it stand upright for approximately 24 hours. This will reduce the possibility of a malfunction in the cooling system from handling during transportation.***

The beverage cooler must be positioned that the plug is accessible. Release the power cord and move your beverage cooler to its finally location. The beverage cooler should be installed in a suitable place where the compressor will not be subject to physical contact.

Note: For freestanding installation, it requires 30mm gap between both sides for the beverage cooler as well as the rear, which allows the proper air circulation to cool the compressor and condenser. Even for built-in installation, it requires 10mm space on each side and at the top. The air vent at the front must never be covered or blocked in any way.

***Levelling your beverage cooler**

Beverage cooler must be levelled before loading your beverages. Your beverage cooler is equipped with 4 adjustable feet to facilitate easy levelling. Euro Appliances recommends that you tighten the back feet to the maximum and adjust the front feet to create a level.

***Products & Specifications**

EBC600SX1

Type	Single Temperature Zone
Item Number	EBC600SX1
Bottle Capacity	Approx. x133 standard 375ml cans
Dimension (W*D*H)	595*600*875mm
Weight	51KG
Refrigerant	R600a/30g
Cooling System	Compressor Cooling
Ambient Temp	60-90 °C
Temperature Range	0-22 °C
Rated Voltage	220 - 240V
Rated Frequency	50HZ
Input Power	70W

***Operating your beverage cooler**

- 1) Turning on your beverage cooler. Plug in and switch on the beverage cooler by pressing on the power button for a few seconds. When you use the beverage cooler for the first time (or restart the beverage cooler after having it power off for a long time), there will be a few degrees variance between the temperature you have selected and the one indicated on the LED readout. This is normal and it is due to the length of the activation time. Once the beverage cooler is running for a few hours everything will stabilize.

Important: If the unit is unplugged, power is lost or turned off, wait 3 or 5 minutes before restarting the unit. The beverage cooler might not start if you attempt to restart before this time delay.

2) Operating noises. To reach the desired temperature settings, Euro beverage cooler, like all beverage coolers operating with compressors and fans, may produce the following types of noises. These noises are normal and occur as follows:

- Gurgling sound, caused by the refrigerant flowing through the appliance's coils;
- Cracking/popping sounds, resulting from the contraction and expansion of the refrigerant gas to produce cold;
- Fan operating sound, to circulate the air within the beverage cooler.

3) Loading your beverage cooler. You might load your cans or bottles standing or lying in single or double rows while taking note of the followings: If you do not have enough cans or bottles to fill your beverage cooler, it is better to distribute the load throughout the beverage cooler so as to avoid "all on top" or "all below" type loads.

- Do remove or relocate metal racks to accommodate large type of cans or bottles when necessary.
- Keep small gaps between the wall and the cans or bottles to allow air circulation.
- Do not over load your beverage cooler to facilitate air circulation.
- Avoid obstructing the internal fan (located inside on the back panel of the beverage cooler)
- Do not try to slide the racks outwards beyond the fixed position to prevent the cans or bottles from falling.

- Do not pull out more than one loaded rack at a time as this may cause the beverage cooler to tilt forward.
- Do not cover the metal racks with alloy foil or other materials, as it will obstruct air circulation
- Do not move your beverage cooler while it is loaded with beverages. The might distort the main cabinet.

***Temperature Setting**

Notes: depending on the loading and settings chosen, it takes 24hours for the beverage cooler to see the temperature stabilizing. During this time LED seems to move erratically. It is normal process. This process occurs whenever the setting is modified and/or whenever a large amount of cans or bottles are added to the beverage cooler. Factory default temperature setting is pre-set of 5 °C. In the event of a power interruption, all previous temperature settings are automatically erased and it will revert to the pre-set temperature setting.

Important: The LCD displays by default the actual internal air temperature. It's important to understand that there is a difference between the air temperature inside the beverage cooler and the actual temperature of the beverages" You will need to wait approximately 12 hours before noticing the effects of temperature adjustment due to the critical mass within a full beverage cooler. Once the thermostat is set it is strongly advised not to toy with it or adjust frequently. The thermostat will maintain the temperature inside the beverage cooler within a +/- 2.5 °C range, the actual temperature of the beverages will only fluctuate 0.5 °C to 1 °C.

1) Control panel of beverage cooler:



The LED displays the internal air temperature. The desired temperature can be adjusted by pressing Up or Down buttons. The temperature setting can be adjusted from 0 °C to 22 °C. Press and hold the Up and Down buttons together, the set temperature will temporarily flashed in the LED display for 5 seconds.

 **Cooling Indicator light:** When the light is on, the cooling mode is currently in operation.

 **Interior Light:** You can turn on/off the interior light by pressing the “Globe” button. The light will be turned off automatically if it remains ON for 10 minutes. You have to press the “Globe” button again and the light will turn back on. For the best storage condition of wine, please keep the light off except while viewing.

*Defrosting/Hygrometry/Condensation/Ventilation

Your beverage cooler is designed with auto defrost system. The defrost water from the beverage cooler storage compartment drains automatically and part of it goes into a drainage container, which is located at the back of the wine cooler next to the compressor. The heat is transferred from the compressor and evaporates any condensation that has collected in the pan. Part of the

remaining water is collected within the wine cooler for humidity purposes. All Euro beverage coolers are equipped with a double glazed glass door to minimize condensation on the glass door. The unit is not totally sealed, fresh air admission is permitted through the drainpipe. Air is circulated through the beverage cooler by means of a fan /fans and the hollow shelves.

Notes: The water collected by condensation, is therefore recycled. Under extremely dry environmental conditions, you may have to add some water into the water container provided with your wine cooler. During the refrigerating cycle, heat is given off and disperses through the external surfaces of the beverage cooler. Avoid touching the surfaces during those cycles.

***Reversing the Door Swing of Beverage Chiller**


This appliance has the capability of the door opening from either the left or right side. The unit is delivered to you with the door opening from the left side. Should you desire to reverse the opening direction, please follow the instructions below:

Note: All parts removed must be saved to allow the door swing to be reversed.

1. Disconnect the power and take out all the beverages. Carefully lay or lean the beverage cooler on its back. Use cushioning to protect the floor and the wine cooler.
2. Open the glass door and remove the two lock screws (2) holding the door shaft assembly (3) to the glass door. Before careful to hold the glass door firmly after removing the screws. (Fig.1).
3. Lift up the removed glass door and place it on a padded surface to prevent

scratching it.

4. Remove the two screws from the door bottom at right side and install them to the door bottom at left side. (Fig.3)
5. Use the new bottom hinge provided in the plastic bag inside the wine cooler and installs it at the designated position on the left side, and installs the door shaft (3) assembly accordingly. (Fig. 2)
6. Remove the upper hinge cover (4) and remove the four screws (5) that are used to fix the upper hinge (6) to the cabinet top. Then remove the upper hinge and install it at the designated position on the left side (Fig. 4)
7. Set the glass door into the designated position and install the lock screws (2) to connect the door shaft assembly with the glass door and tighten them before the door is leveled. (Fig.5)
8. Remove the handle from the left side of the door and install it on the right side.

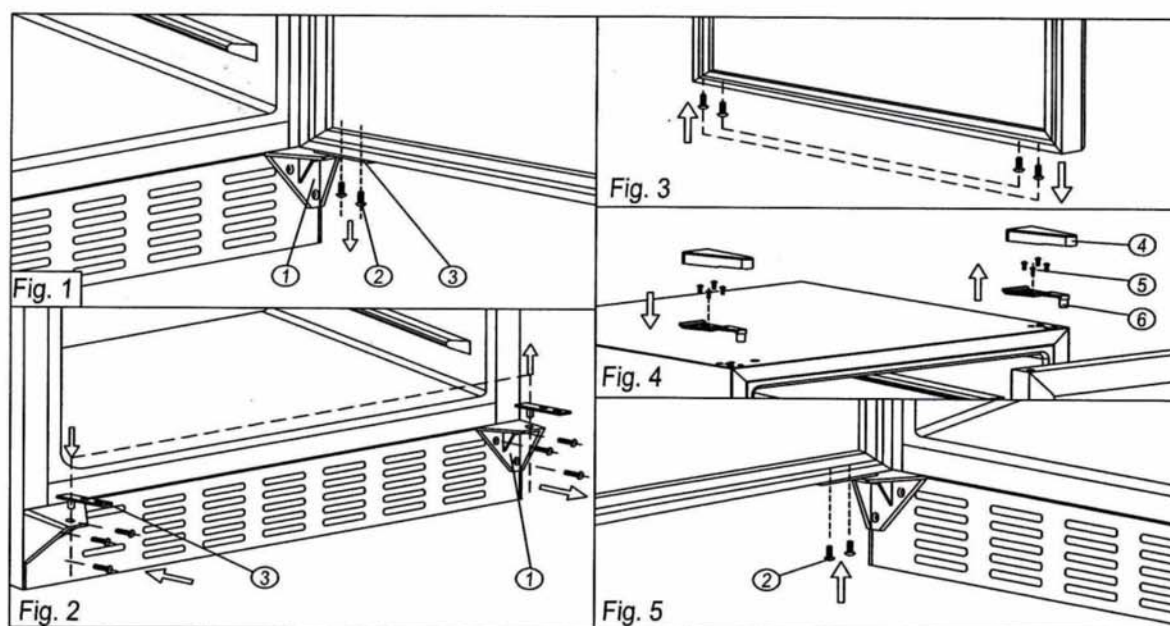

① Lower Door Hinge
④ Hinge Cover


② Lock Screws
⑤ Screws

③ Door Shaft Assembly
⑥ Upper Door Hinge

*** Installing Stainless Steel Handle**

This beverage cooler includes a stainless steel handle that is required to operate this unit. To install the handle please follow the below instruction:

1. Pull away the door gasket in the area where the handle is to be installed – you can see two designated holes for handle installation. The gasket is easily displaced by hand, no tools are necessary.
2. Install the handle tightly as shown below with the two screws. Lock washers and flat washers provided. (DO NOT over tighten as this will cause damage to the handle assembly and stainless steel surface of glass door).
3. Replace the door gasket to its original position.

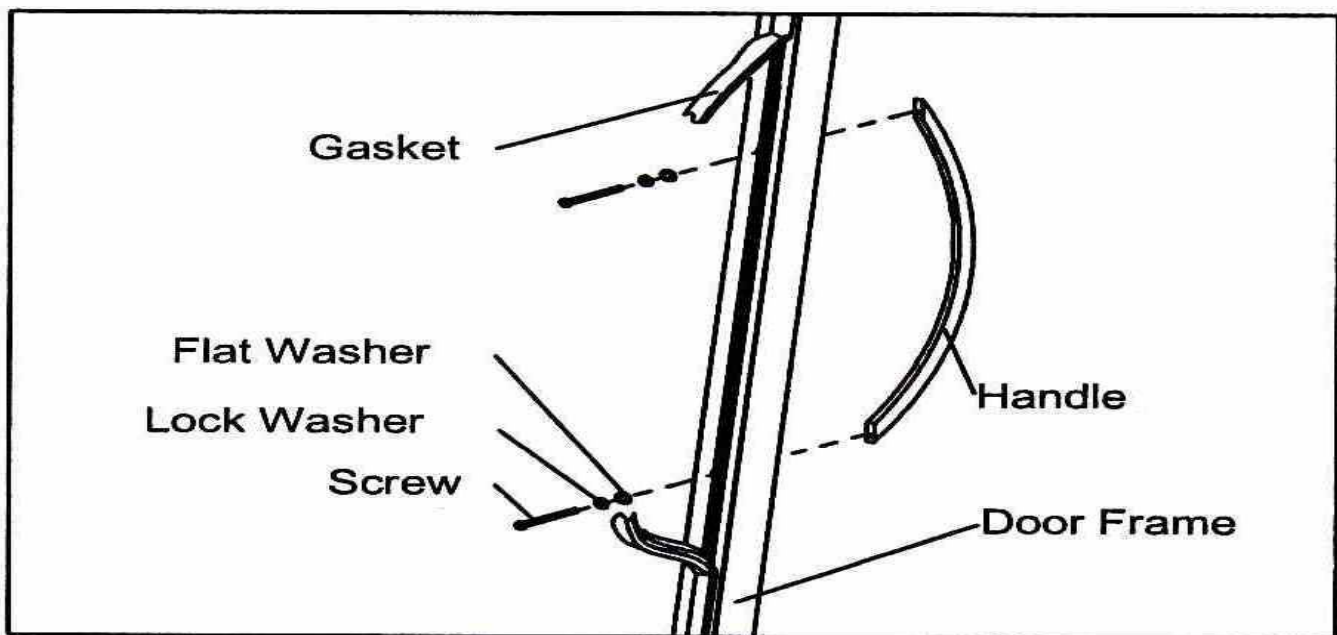

***Power Failures and Operation Anomalies**

In the event of a power interruption, all previous temperature settings are automatically erased and it will revert to a preset temperature setting. Most power failures are corrected within a short period of time. An hour or two's loss of power will not affect your beverage cooler's temperatures. To avoid sudden change of temperature while the power is off, you should avoid opening the door. For longer period of power failure, do take steps to protect your beverages.

Note: Irrespective of the cause, if you notice either abnormal temperature or humidity levels inside your beverage cooler, be reassured that only long and frequent exposure to these abnormal conditions can cause a detrimental effect on your wines.

Ensure that there is power to the electrical supply plug by connecting another electrical appliance to it. Check Fuse, if any. Make sure that the door is closed properly.

If your wine cooler appears to be malfunctioning, unplug it and contact EURO after sales service on 1800 440 335. Any intervention on the cold circuit should be performed by a refrigeration technician who should carry out an inspection of the circuit sealing system. Similarly, any intervention on the electrical circuit should be performed by a qualified electrician.

Noted: Any Intervention performed by a non-technician will lead to the warranty being considered as null and void.

*Troubleshooting Guide

PROBLEM	POSSIBLE CAUSE
Beverage cooler does not operate.	Not plugged in. The appliance is turned off. The circuit breaker has tripped or a fuse has blown
Beverage cooler is not cold enough.	Check the temperature control setting. External environment may require a higher setting. The door is opened too often. The door is not closed completely. The door gasket does not seal properly.
Turns on and off frequently.	The room temperature is hotter than normal. A large amount of contents has been added to the Wine Cooler. The door is opened too often. The door is not closed completely. The temperature control is not set correctly. The door gasket does not seal properly.
The light does not work.	Not plugged in. The circuit breaker tripped or a blown fuse. The bulb has burned out. The light button is "OFF".
Vibrations.	Check to assure that the Wine Cooler is level.
Beverage cooler seems to make too much noise.	Some noise may come from the flow of the refrigerant, which is normal. As each cycle ends, you may hear gurgling sounds caused by the flow of refrigerant in your Wine Cooler. Contraction and expansion of the inside walls may cause popping and crackling noises.

	The Wine cooler is not level.
The door will not close properly.	The Wine Cooler is not level. The door was reversed and not properly installed. The gasket is dirty. The shelves are out of position.

Eurostyle Group trading as Euro Appliances

No. 65 Glynburn Road, Glynde SA 5073

Service Line: 1800 440 335

Fax: (08) 8462 9127

Email: admin@eurostylegroup.com.au