






Product Features

Motor Type	On Board Motor
Dimensions	60cm: 561(W) x 340(H) x 350(D)mm Suits 50cm-75cm Cooking Surfaces 90cm: 861(W) x 340(H) x 350(D)mm Suits 75cm-100cm Cooking Surfaces 120cm: 1161(W) x 340(H) x 350(D)mm Suits 90cm-130cm Cooking Surfaces
Filtration Type	Technopolymer No Drop
Controls	Electronic Push Button Panel
Lighting	2 x LED Dynamic Lighting 2700K / 5600K
Speed Settings	4 Speed
Timer Function	15 Min Auto Shut-Off
Ducting	150mm Circular Outlet
Optional Accessories	N/A
Remote Control	No
Grease Filter Alarm	Yes
Dishwasher Safe Filters	Yes
Charcoal Filter	Optional

Dimensioned Drawings

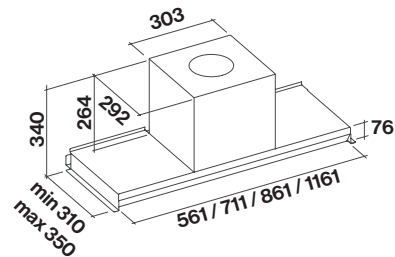

Model Code	Size	Motor Output	Finish
FP3VND60S1	60cm	800 m³/hr	Stainless Steel
FP3VND90S1	90cm	800 m³/hr	Stainless Steel
FP3VND12S1	120cm	800 m³/hr	Stainless Steel
FP3VND60B1 •	60cm	800 m³/hr	Black
FP3VND90B1 •	90cm	800 m³/hr	Black
FP3VND12B1 •	120cm	800 m³/hr	Black

VIRGOLA BLACK NO-DROP

Version

Built-in - 120 cm - 800 m³/h

Collection

Design


EAN code

8034122361390

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) _{re1pW-I.E.C.60704-2-13}	49	55	61	67
Capacity (m ³ /h) I.E.C.61591	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

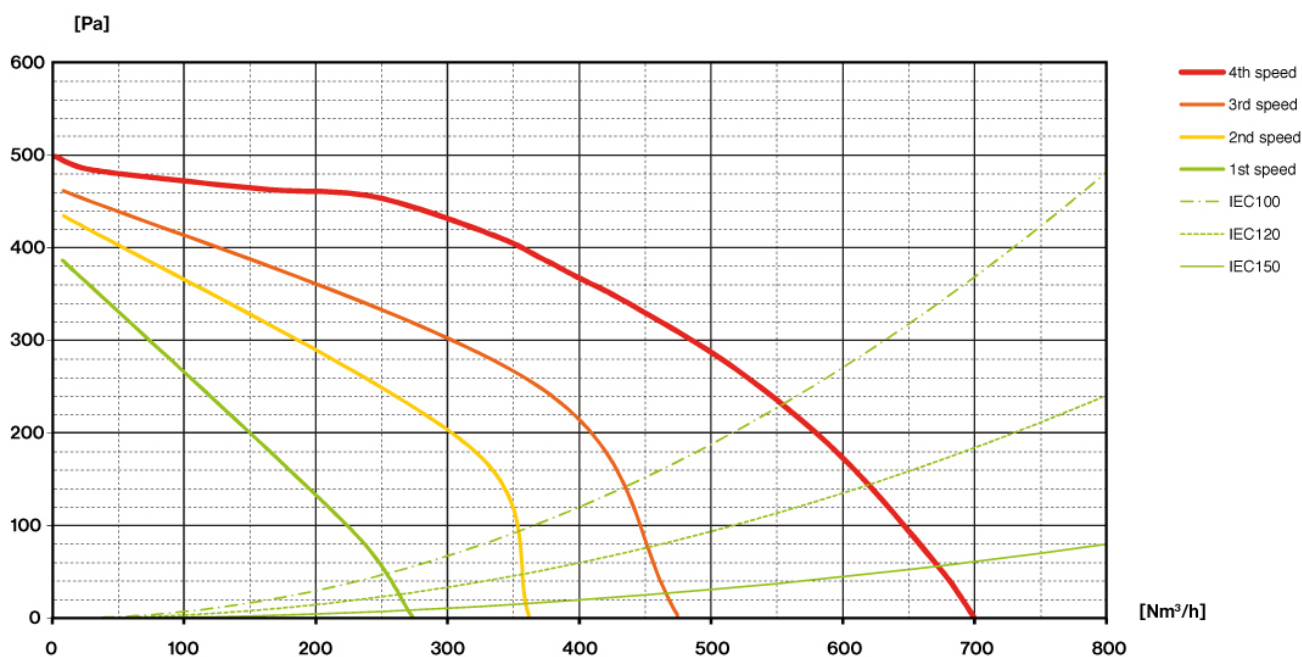


VIRGOLA BLACK NO-DROP

Version
Built-in - 120 cm - 800 m3/h

Collection
Design

EAN code
8034122361390

ENERGY LABEL

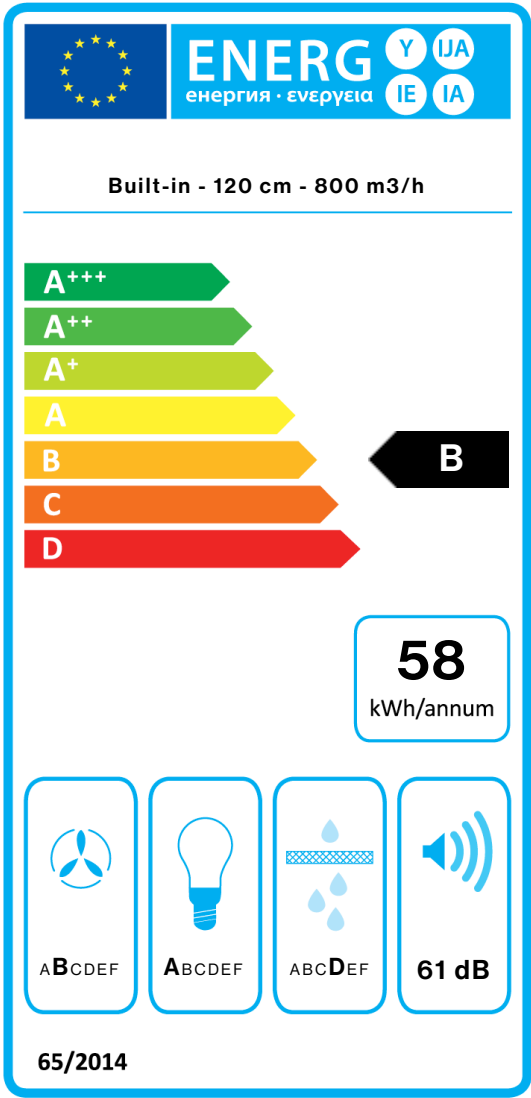

PF		
S	Falmec Spa	
M	Built-in - 120 cm - 800 m3/h	
AEC	58,1	kWh/a
EEC	B	
FDE	26,4	
FDEC	B	
LE	31,4	
LEC	A	
GFE	70,0	
GFEC	D	
Qmin	250,0	m³/h
Qmax	480,0	m³/h
Qboost	620,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	59,2	
Qbep	364,0	m³/h
Pbep	371	Pa
Qboost	620,0	m³/h
Wbep	142,0	W
WL	8,60	W
Emiddle	270	lex
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.