

HydroTap G5 CSHA Celsius Arc Brushed Nickel

Chilled Sparkling

Finish: Brushed Nickel

Product code: H58787Z11AU

Capacity: Residential

Zip HydroTap Design Range CELSIUS Chilled and Sparkling Filtered water, plus Hot and Cold washing up water from a single tap. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.

Specifications

Product name	HydroTap G5 CSHA Celsius Arc Brushed Nickel
Product code	H58787Z11AU
Filtered water type	CSHA
Product approvals	WaterMark, RCM, ARC
Wels rating	5 Star, 5.5 litres
Warranty	3-years comprehensive parts and labour or 5-years with a Zip Certified Installation
Chilling Technology	Air cooled technology making it 100% water efficient

Plumbing

Water supply requirements	Cold and Hot
Water connection	1/2" BSP (G1/2)
Water valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Water pressure	Min 250kPa - Max 700kPa

Electrical

Power rating	0.18kW 220-240V 50Hz
Power supply	1 × 10 Amp socket outlet

Tap design

Tap	Zip HydroTap Design Range CELSIUS ARC Tap (Brushed Nickel)
HydroTap style	Celsius Arc
Finish	Brushed Nickel
Disability options	no

Command centre

Dimensions	W280mm x D429mm x H333mm

Installation

Installation requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.

2. You will require suitable mains electrical and drinking water connections, plus waste water drainage. The HydroTap must be installed to within the limits of the hose and cable lengths supplied.


3. Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.

4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.

5. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Files

Installation Layout 3D (DWG)

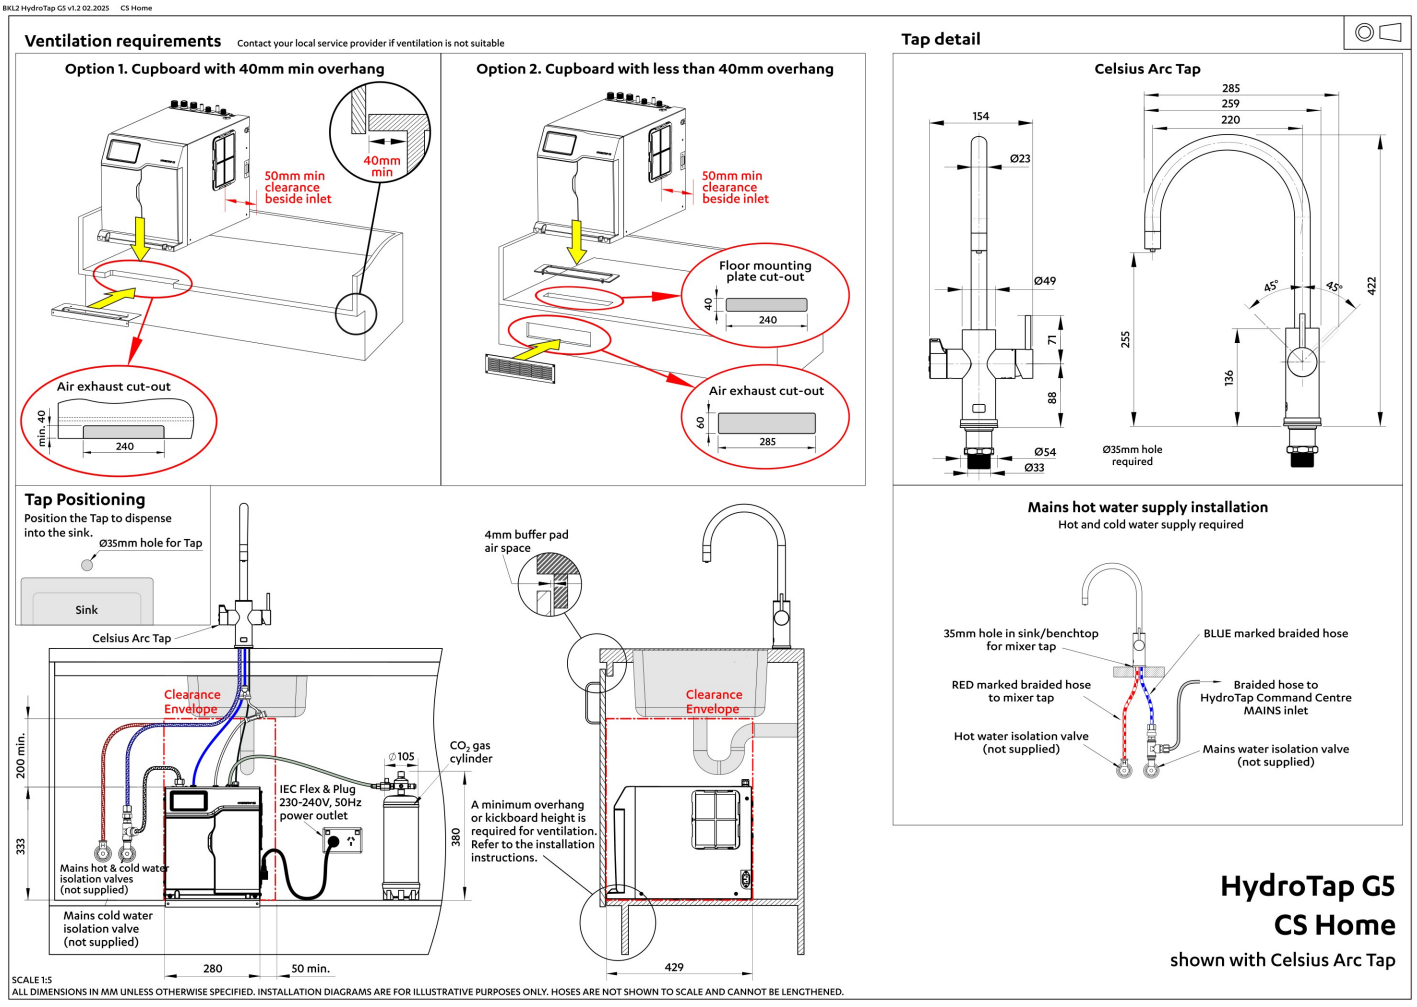

Installation Layout (PDF)

BIM files

ArchiCAD Zip Water Library (IFC)

BIM downloads

Revit Project File (RFA)

Revit Virtual Showroom (RVT)

Download all

Certifications























Health & Safety (PDF)

Environment ISO (PDF)

Quality ISO (PDF)

Environmental Product Declaration Brochure (PDF)

ARC (PDF)

Filter performance (PDF)

Manuals & brochures



Brochure (PDF)



CO_2 MSDS (PDF)



Instruction manual (PDF)



Quick guide (PDF)



Tap operation label (PDF)



User manual (PDF)

Download all