


DIMENSION AND INSTALLATION GUIDE

french-door refrigeration

WHE5100SA-D

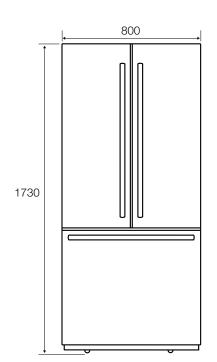

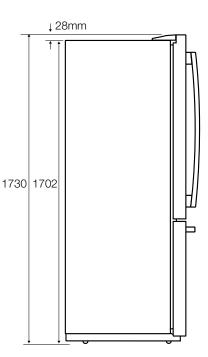



Minimum Recommended Airspaces

These are the recommended minimum clearances.




If you do not have a cupboard with a rear gap, the recommended clearance area on top increases from 50mm to 90mm (x) and from 32mm to 72mm (y).



Please note:

If 5 mm side clearance, the fridge cabinet must sit at least 5 mm proud of kitchen cabinetry for doors to open. A 5 mm side clearance requires 50 mm rear clearance and 50–90mm clearance above.



When positioned in a corner area, spacing of at least 300mm on the hinge side will allow the doors to open enough to enable the removal of bins and shelves.

IMPORTANI

This is a guide of product dimensions only. For complete installation instructions, refer to the manual provided with product.

Westinghouse made for modern families