ORF6X

60cm freestanding or built-in rangehood, stainless steel



actual size 595mmW x 140mmH x 500mmD

finish stainless steel

installation built into cupboard line for freemount onto wall

motor 120 watt

speeds 3, separate buttons plus OFF button

illumination 2 x 40 watt incandescent SES tubular, separate ON/OFF button

noise level 39-62 dBA

capacity 210 cubic metres/hour net


270 cubic metres/hour gross

filtration 2 x 4-ply aluminium grease filters — removable, washable

air extraction recirculation or top direct duct to atmosphere or rear direct duct to atmosphere

ducting required 120mm diameter spigot supplied for ducting

warranty two years parts and labour

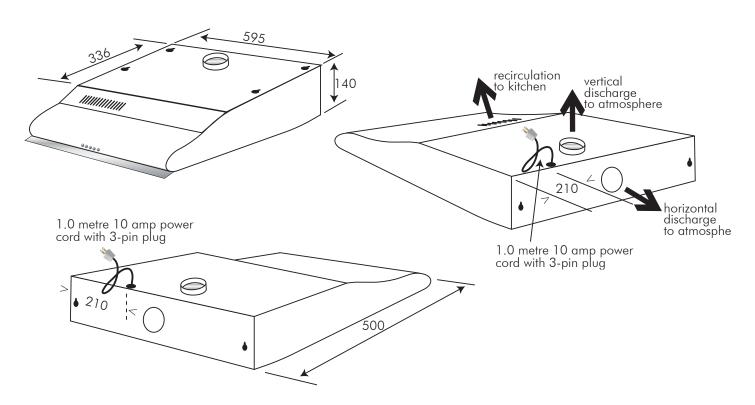

NB: these drawings are not to scale — they are to assist only



