


V-ZUG Australia Pty. Ltd
2/796 High Street East Kew Vic 3102, VICTORIA/Australia
Phone +61 (03) 9832 7500
enquire.au@vzug.com, www.vzug.com

Brochure GK46TIMXS

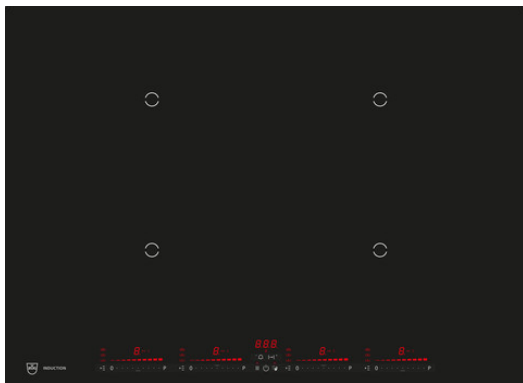

Selected appliance

- Article no.: 3108765405
- Short designation: GK46TIMXSZ
- Standard width: 70.0 cm
- Frame: DualDesign

Details GK46TIMXSZ

Design

- Standard width: 70.0 cm
- Frame: DualDesign

Dimensions

- Cut-out radius: 5.0 mm
- Appliance height: 51.7 mm
- Appliance width: 691.0 mm
- Appliance depth: 501.0 mm
- Appliance corner radius: 1.5 mm
- Support size width: 680.0 mm
- Max. support size width: 680.0 mm
- Support size depth: 490.0 mm
- Max. support size depth: 490.0 mm
- Installation height when flush-fitted: 51.7 mm
- Cut-out width when flush-mounted: 697.0 mm
- Cut-out width when surface-mounted: 680.0 mm
- Max. cut-out width when surface-mounted: 680.0 mm
- Cut-out depth when flush-mounted: 507.0 mm
- Cut-out depth when surface-mounted: 490.0 mm
- Max. cut-out depth when surface-mounted: 490.0 mm
- Empty weight: 10.5 kg
- Cooking zone 1 position: front left
- Cooking zone 1 dimensions: 18x20 cm
- Cooking zone 3 position: rear right
- Cooking zone 3 dimensions: 18x20 cm
- Cooking zone 4 position: front right
- Cooking zone 4 dimensions: 18x20 cm

Display and operation

- Display: digital display
- Controls: MultiSlider/direct selection
- Operating time
- Languages in display: -
- Button sound (on/off)

Energy

- Cooking zone 1 max. power: 3700.0 W

- Cooking zone 2 max. power: 3700.0 W
- Cooking zone 3 max. power: 3700.0 W
- Cooking zone 4 max. power: 3700.0 W
- Cooking zone 5 max. power: 3700.0 W
- Type of connection: 380-415V 2N~
- Type of connection: 220-240V~
- Frequency (1): 50/60 Hz
- Frequency (2): 50/60 Hz
- Connected loads: 7.4 kW
- Fuse protection: 16.0 A
- Fuse protection: 32.0 A
- Plug type: cable

Hob features

- Powerplus: 4.0
- Residual heat indicator
- Timer
- Restore function
- Cooking zones: 4
- Power levels: 9
- EcoStandby
- Heating technology: induction cooking zones

Functions

- Pause button
- Warming function
- Cleaning lock
- Zone connection
- Melt function
- Simmer function
- Childproof lock
- Safety package
- Pan detection (10–22 cm)

Additional data

- Feature level: 5

Service and interfaces

- Warranty: 2 years