

OR914CXA

ID200209
code OR914CXA

90cm chimney rangehood, wallmount,
stainless steel with glass canopy



size	900mmW x 480mmD x 823mmH maximum
finish	stainless steel and glass
capacity	710m ³ /hr net, 923m ³ /hr gross
installation	wallmount NB: can be ducted direct to atmosphere or recirculated to kitchen
ducting	150mm diameter ducting material required
motor	198 watt centrifugal, twin impellers
illumination	2 x 20-watt halogen globes, separate flush buttons
speeds	three, separate flush buttons
delay stop	5-minute delay stop, flush button
filtration	single 4-ply aluminium grease filter — removable, washable
noise rating	34–56 dBA maximum
power cable	1.65 metre
current	1.0 amp
warranty	two years parts and labour

PERFORMANCE

With a true net air extraction of 710m³/hr net an hour, the more vigorous styles of cooking, such as pasta boiling, griddle and stir frying, are catered for. At the touch of the speed control, the power can be switched down for the gentlest of simmers.

LOW MAINTENANCE

Easy cleaning is a premium with wipe-over 18/10 grade stainless steel surface. Two lift-out stainless steel and aluminium four-ply grease filters can be hand washed. The lighting and speed controls are underslung and forward away from most of the vapour trail and there is easy access to the twin light globes.

QUIETNESS

34 to 56 dBA. The motor/impellor encasement and internal flue are smooth-walled to eliminate air drag and noise, hand-finished welded metal joins for no vibration.

SAFETY

Thermal overload protector on motor; fire-retardant hardened metal and mesh. VO self-extinguishing polycarbonate for motor housing and internal flue.

DUCTING THE AIR DIRECT TO ATMOSPHERE

Ideally, the filtered air is removed from the kitchen and household to the outside of the building. This method of rangehood installation ensures maximum removal of the heat, vapours, odours and particle-laden air.

RECIRCULATING THE AIR TO THE KITCHEN

When it is structurally impossible to duct the filtered air to the outside of the building, the filtered air is vented back into the kitchen via the recirculation vents in the side of the chimney. A more frequent inspection and washing of the metal grease filters is recommended for this mode of installation.


The easily-removable grease filters will isolate most of the grease, oil and food particles. These filters are washable using warm, soapy water or medium dishwasher program.

omega


OR914CXA

ID200209
code OR914CXA


90cm chimney rangehood, wallmount,
stainless steel with glass canopy

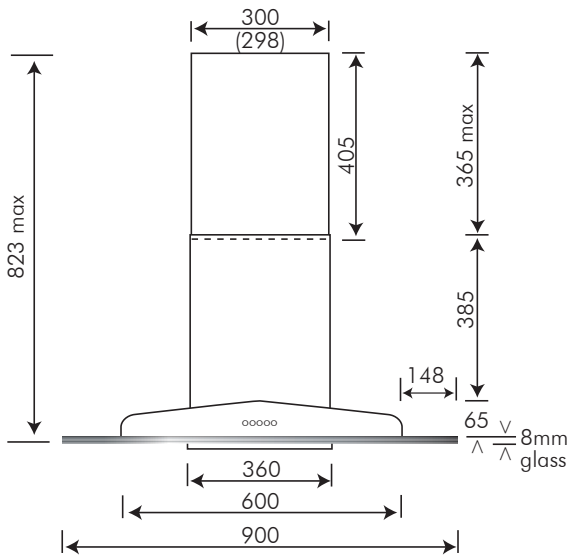

FRONT ELEVATION

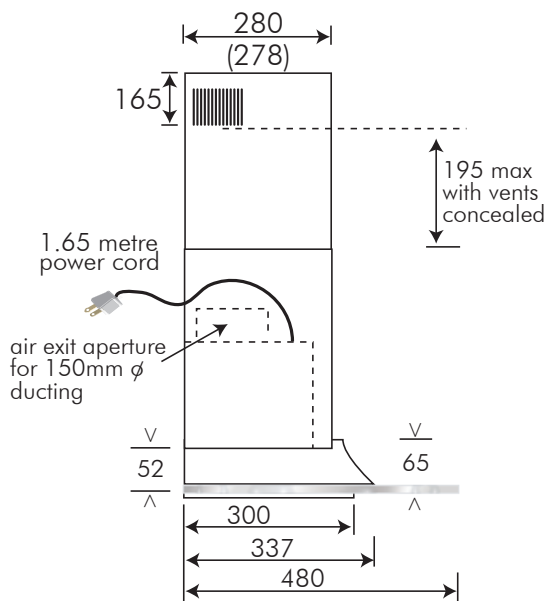


SIDE ELEVATION

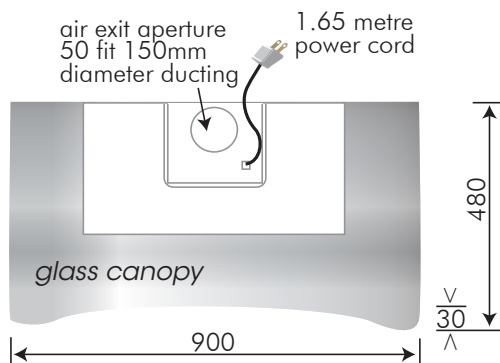


PLAN

motor	centrifugal with twin impellers
electrical supply	240 volt, 50 Hz
electrical connection	1.65 metre connected power cord with 10 amp 3-pin plug for direct plugging to standard 10 amp GPO
motor wattage	198 watts
illumination	2 x 20-watt halogen
total wattage	238 watts
current	1.0 amp
packaged dimensions	1180(390)mm x 445mm x 570mm
supplied	<ul style="list-style-type: none"> instructions for installation, operation and maintenance wood screws, raw plugs, dyna bolts

PLEASE NOTE: drawings are not to scale.
They are to assist only.

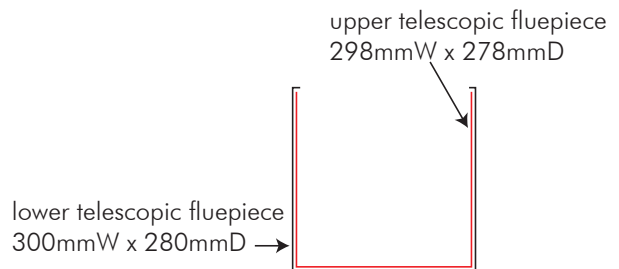

CHIMNEY PLAN

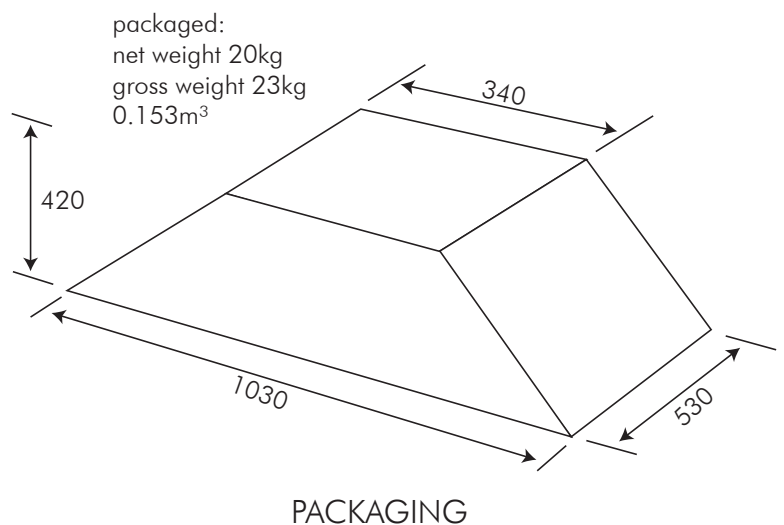

PACKAGING

WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.

omega