ISLAND RANGE HOOD



X301ISL



























ILVE's Island range hoods are designed to stealthily keep your kitchen fresher and cleaner. We all adore the scrumptious smells that billow from your favourite dishes in the kitchen, but not when those smells become stagnant within the home. ILVE's rangehoods are designed to stealthily keep your kitchen fresher and cleaner. Their powerful high speed fan removes cooking odours, smoke and vapour from the kitchen, while extremely fine filters trap all grime.

It features intelligent features like the new ECO-booster, auto fire shut-down sensors and a filter cleaning reminder light. The smart timer function can be set for an automatic turn off leaving you to your culinary masterpiece at hand. In-built LED Lights produce a natural brightness, illuminating your cooking area while the streamlined electronic control panel ensures whisper quiet air extraction is at your fingertips. Either as a visual focal point or discreetly integrated, it is easy to see that ILVE Rangehood's are built to extract!

Standard Option - Rangehood Colour



ISLAND RANGE HOOD

(i) ILVE

X301ISL

X301ISL ISLAND HOOD

FFATURES

- · AS304 Stainless Steel construction
- · Designed and purpose built for ILVE appliances
- Recommended for Tepanyaki models or when very high air extraction is required
- · Ultra sleek design with stainless steel moulded front facia
- · Built to exacting professional cooker hood standards
- · Suitable for all ILVE cooktops 60, 80, 90 & 100cm
- Programmable 5, 10, 15, 20 minute auto fan shut-down
- · Electronic touch control variable speed
- LED lighting
- Noise (dB): low 35 high 62

SAFETY

Motor cut out fire protection

CLEANING

Filter cleaning reminder light

FII TERS

· Honeycomb stainless steel filters

MOTOR

- Max. Air flow (m3/h): 920 net or 1200 gross*
- Twin turbine high velocity fan, optional in-line motor is available to assist air flow
- ECO-booster Feature: Our new and improved range hoods incorporate a 4th speed that is used as a "ECO-booster". When active, the range hood will operate at a higher speed (4) for 10 minutes, and then the speed will automatically turn down to speed 3.


DETAILED INFORMATION

- Size: 100cm
- · Power standard: 10 Amp plug
- · Ducting size 150mm**
- Suitable for ducting or recirculating***

*Range Hood extraction rate m3/h reading is measured at: 1m duct up, 1 x 90° C bend & 1m vertical duct

**Using the conversion back to 125mm may effect performance

***Optional recirculating kit and accessories are available (consult with ILVE)

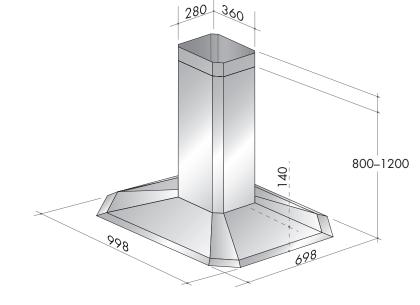

NB: drawings are not to scale — they are to be used as a guide only

CONTACT US:

Email:

customercare.au@ilve.com www.ilve.com/en-au/

Live, Cook, Love.

DISCLAIMER

ILVE AUS & NZ is continually seeking ways to improve the design specifications, aesthetics and production techniques of its products. As a result alterations to our products and designs take place continually. Whilst every effort is made to produce information and literature that is up to date, this brochure should not be regarded as an infallible guide to the current specifications, nor does it constitute an offer for the sale of any particular product. Product dimensions indicated in our literature is indicative only. Actual product only should be used to define dimension cutouts. Distributors, and retailers are not agents of ILVE AUS & NZ and are not authorized to bind ILVE AUS & NZ by any express or implied undertaking or representation.