



HYDROTAP G5 BHA CELSIUS CUBE BRUSHED ROSE GOLD



BOILING




HOT & AMBIENT

FILTERED

UNFILTERED

Order Code H59786Z05AU

Zip HydroTap Design Range CELSIUS Boiling Filtered water, plus Hot and Cold washing up water from a single tap. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, SteriTough® antimicrobial protection impregnated into key water paths for enhanced hygiene, and 0.2 micron water filtration.

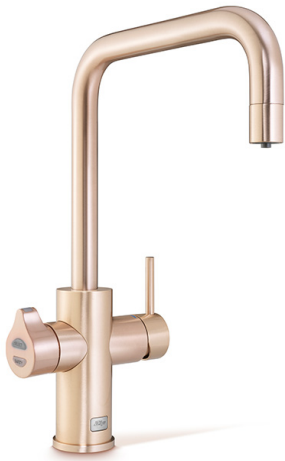

Manufacturing Code	H59786Z05AU
Capacity	Residential

Tap	Zip HydroTap Design Range CELSIUS CUBE Tap (Brushed Rose Gold)
Water Pressure	Min 170kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold and Hot
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.35kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W280mm x D313mm x H333mm
Product Approvals	WaterMark, RCM

Wels Rating	5 Star, 5.5 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)


Installation Requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com'


Installation Detail

Ventilation requirements Contact your local service provider if ventilation is not suitable

Clearance envelope
Position the Tap and the Command Centre as close together as possible.



200
333
50
Command Centre width 50

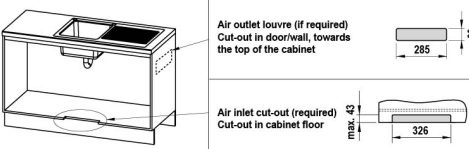


Air outlet louvre (if required)
Cut-out in door/wall, towards the top of the cabinet
285 60

Air inlet cut-out (required)
Cut-out in cabinet floor
max 43 326


HydroTap Tap options

Celsius Arc Tap

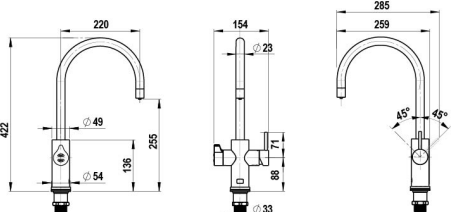

220 422 154 285 259 49 54 33 135 88 71 45° 45°


Celsius Cube Tap

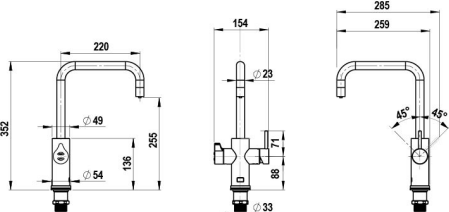

220 332 154 285 259 49 54 33 135 88 71 45° 45°


Tap Positioning
Position the Tap to dispense into the sink, allowing clearance for a cup or teapot.

Ø35mm hole for Tap

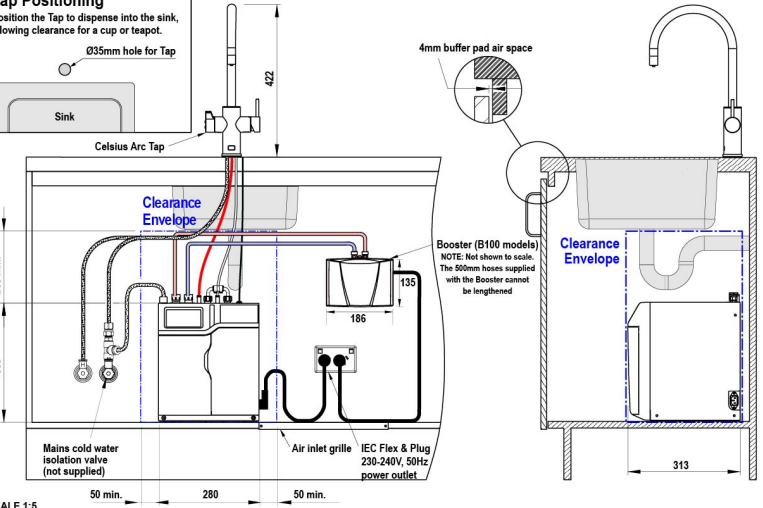

Sink
Celsius Arc Tap
422
313
200 min.
333
Clearance Envelope
4mm buffer pad air space
Clearance Envelope
186 135
50 min. 280 50 min.
Mains cold water isolation valve (not supplied)
Air inlet grille
IEC Flex & Plug 230-240V, 50Hz power outlet
Booster (B100 models)
NOTE: Not shown to scale. The 500mm hoses supplied with the Booster cannot be lengthened.

Mains hot water supply installation
Hot and cold water supply required

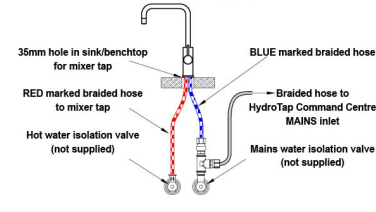

35mm hole in sink/benchtop for mixer tap
RED marked braided hose to mixer tap
Hot water isolation valve (not supplied)
BLUE marked braided hose for mixer tap
Braided hose to HydroTap Command Centre MAINS inlet
Mains water isolation valve (not supplied)

HydroTap G5
B Home, B60, B100
shown with Celsius Arc Tap

SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

