

Serie | 2

DLN54AA70A
53 cm Integrated Rangehood



Optional accessories

- DWZ0IN0A0 : Active carbon filter
 DWZ0IN0T0 : Recirculating kit

The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.

- **Extraction rate:** at 420 m3/h, it quickly ensures optimal kitchen air quality.
- **Especially quiet:** high performance at just 67 dB.
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.

Technical Data

Typology :	Traditional
Approval certificates :	Australia Standards
Length electrical supply cord (cm) :	150
Required niche size for installation (HxWxD) :	208mm x 493mm x 257mm
Net weight (kg) :	4.720
Type of control :	mechanical
Number of speed settings :	3
Maximum output air extraction (m3/h) :	420
Maximum output recirculating air (m3/h) :	410
Number of lights :	2
Noise level (dB) :	67
Diameter of air outlet (mm) :	120
Grease filter material :	Washable aluminium
Odour filter :	No
Operating Mode :	Convertible
Optional accessories :	DWZ0IN0A0, DWZ0IN0T0
Grease filter type :	Kassette
Connection Rating (W) :	121
Current (A) :	KSA
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	AU plug
Installation typology :	Built-in
Material body :	Lacquered
Approval certificates :	Australia Standards
Plug type :	AU plug
Dimensions of the product, with chimney (if exists) (in) :	/ x x
Dimensions of the packed product (in) :	10.62 x 12.79 x 32.16
Net weight (lbs) :	10
Gross weight (lbs) :	17
Motor location :	Integrated motor in hood body
No-return airflow flap :	Yes
Length electrical supply cord (cm) :	150
Dimensions of the product, with chimney (if exists) (mm) :	x 534 x 300
Dimensions of the packed product (HxWxD) (mm) :	270 x 325 x 817
Net weight (kg) :	4.720
Gross weight (kg) :	8.0



Serie | 2 Ventilation

DLN54AA70A

53 cm Integrated Rangehood

The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.

Design & Innovation

- Sliding switch control controls for power and light

Power and Mode of Operation

- 3 power settings
- Maximum extraction 420 m³/h
- Extraction rate in recirculation mode:
Max. normal use: 410 m³/h
- Ducted and recirculated-air operation
- For recirculated extraction optional recirculation kit
(accessory) needed
- Noise min./max. Normal Level: 55/67 dB
Noise max. Intensive setting: NO_FEATURE dB
- Noise level in recirculation mode:
Max. normal use: 68 dB(A) re 1 pW (55 dB(A) re 20 µPa sound
pressure)

Comfort & Convenience

- Dishwasher safe metal grease filters
- 2 x 3W LED lights
- with one-way flap: prevents outside air from entering your
kitchen

2 year warranty


Technical Information

- Appliance width: 534 mm
- Appliance dimensions (HxWxD): 208 x 534 x 300 mm
- Built-in dimensions (HxWxD): 208 x 493 x 257 mm
- Diameter pipe Ø 120 mm (Ø 120 mm enclosed)
- Electrical cable length 1.5 m
- Power rating: 121 W


Serie | 2 Ventilation

DLN54AA70A


53 cm Integrated Rangehood

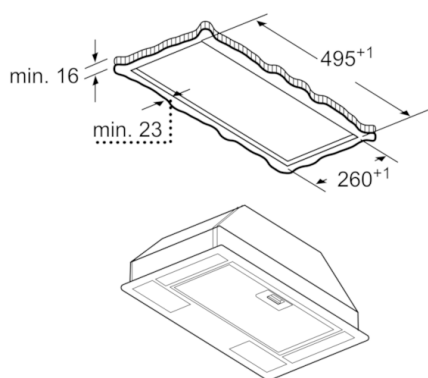


measurements in mm

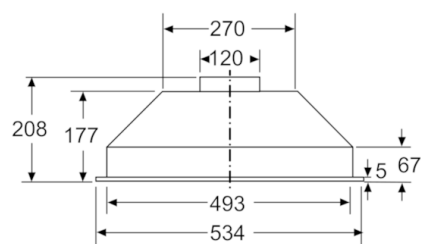

measurements in mm

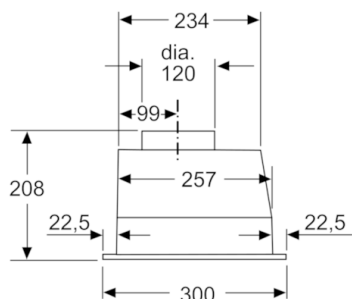

measurements in mm

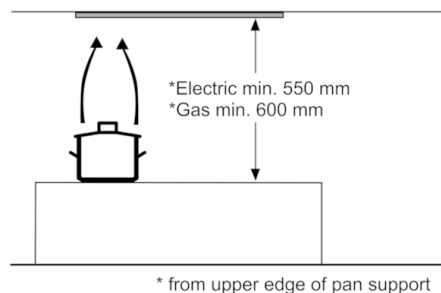

* from upper edge of pan support

Use with gas hob:
Total maximum output: 9.75 kW
Maximum output of wok 4 kW.
Total maximum output of rear hobs: 5.25 kW

measurements in mm