

N 70, INTEGRATED RANGEHOOD, 86 CM D58ML66N1A



Z5135X1	Standard odor filter (replacement)
Z5135X3	Standard recirculation kit
Z51ITD1X1	Long Life recirculation kit external
Z51ITP0X0	Long Life odor filter (replacement)
Z51IXB1X6	Clean Air Plus odor filter (replacement)
Z51IXC1X6	Clean Air Plus recirc. kit external

- ✓ Efficient Drive Motor – Quiet and energy-efficient motor for a calmer kitchen.
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense

Typology: Built-in/Built-under
 Length electrical supply cord: 150.0 cm
 Min. required niche size for installation (HxWxD): 418mm x 836.0mm x 264mm mm
 Minimum distance above an electric cooktop: 600 mm
 Minimum distance above a gas cooktop: 650 mm
 Net weight: 12.3 kg
 Type of control: Electronic
 Number of power settings: 3-stages + intensive setting
 Maximum output air extraction: 610 m³/h
 Boost position output recirculating: 727 m³/h
 Maximum output recirculating air: 563 m³/h
 Boost position air extraction: 800 m³/h
 Number of lights: 2
 Noise level: 64 dB(A) re 1 pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable aluminium
 EAN code: 4242004273547
 Connection Rating: 172 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50 Hz
 Plug type: AU plug
 Installation typology: Built-in



N 70, INTEGRATED RANGEHOOD, 86 CM D58ML66N1A

Design & Innovation

- For installation in a kitchen cabinet
- Appliance colour: brushed steel
- Rim ventilation
- metal grease filters with stainless steel cover

Size & Power

- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use: 610 m³/h
- Intensive: 800 m³/h
- Noise level according to EN 60704-3 exhaust air:
- Max. normal use: 64 dB(A) re 1 pW
- Intensive: 70 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as accessory) your appliances reaches:
- Extraction rate in recirculation mode: Max. normal use: 563 m³/h
- Intensive: 727 m³/h
- Noise level in recirculation mode: Max. normal use: 71 dB(A) re 1 pW
- Intensive: 77 dB(A) re 1 pW

Features

- Electronic controls
- Push button controls (3 power levels plus intensive setting) with Electronic display
- Suitable for ducted extraction and recirculation
- Accessories required for recirculated extraction: Recirculating kit
- Automatic intensive revert setting - 6 min
- EfficientDrive BLDC technology


Convenience

- 2 x 1 Watt LED lights
- Light Intensity: 266 lux
- Colour Temperature: 4000 K
- Dishwasher safe metal grease filters
- Saturation indicator for grease filters


Technical Information

- Appliance dimensions (HxWxD): 418 x 860 x 300 mm
- Built-in dimensions: width: 84 cm, depth: 26 cm
- 120 or 150 mm tube connection diameter
- Electrical cable length 1.5 m
- Power rating: 172 W
- with one-way flap


N 70, INTEGRATED RANGEHOOD, 86 CM
D58ML66N1A

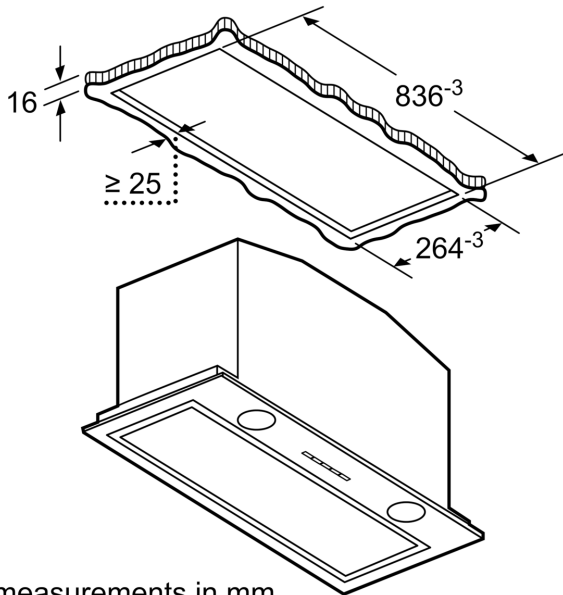

measurements in mm

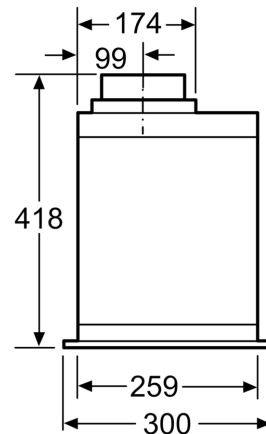

measurements in mm

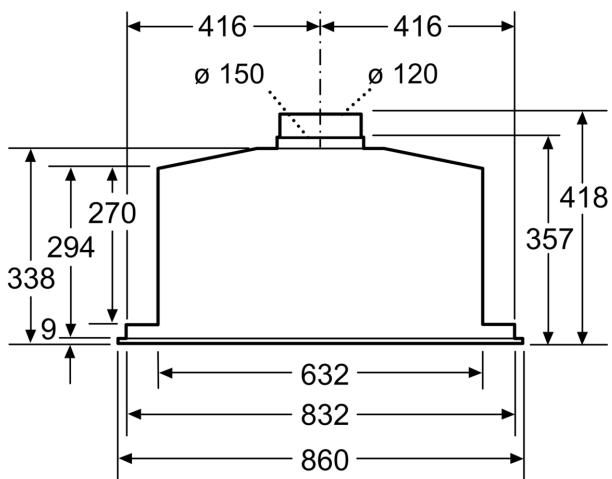

measurements in mm