

PMI127S3

Panoramagic 120 cm range cooker,
induction



Colour range

Body



Stainless
steel – SS




Matt
black – MK

Finishes



Satin

Induction




Induction zone
Bridge
210x380 mm
1,5+1,5 kW

Induction zone
Ø 145 mm
1,85 kW / 1,4
kW

Induction zone
Ø 200 mm
3,0 kW / 2,3 kW

Induction zone
Ø 250 mm
3,0 kW / 2,3 kW

Induction zone
210x190 mm
3,0 kW / 2,1 kW

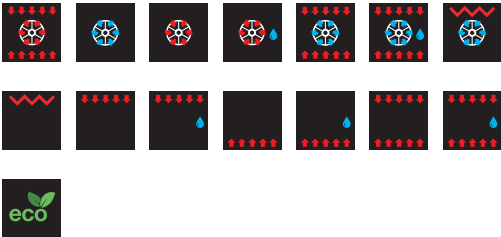Ovens	Primary oven: OV 80 E3 TFT S		Secondary oven: OV 30 E3 TFT	
General features	• Energy class A+ • Operating temperature 30-320°C • Programmer TFT touch control • Electronic temperature control • Cooking probe • Lighting Double internal light • Automatic light switch-on when door opens • Full glass oven door • Soft-closing door • Door glass Triple glass cold door (EN60335-2-6-11.101) • High density insulation • Ventilation cooling tangential • Child safety		• Energy class A+ • Operating temperature 30-250°C • Programmer electronic touch TFT • Electronic temperature control • Lighting Internal light • Automatic light switch-on when door opens • Full glass oven door • Soft-closing door • Door glass Triple glass cold door (EN60335-2-6-11.101) • High density insulation • Ventilation cooling tangential • Child safety	
Cavity features	• Muffle with easy clean enamel • Internal dimensions 64,5x36,5x41 cm • Capacity 97 L • Steam discharge controlled with dry or moist cooking option • Folding grill heating element • Rotisserie spit diagonal • Thermostat with electronic probe		• Muffle with easy clean enamel • Internal dimensions 27,5x35,5x44 cm • Capacity 43 L • Steam discharge • Rotisserie spit • Thermostat with electronic probe	
Consumptions	• Maximum input 3,7 kW • Top electrical heating element 1300 W • Bottom electrical heating element 1470 W • Electric grill 2340 W • Circular heating element 2290 W		• Maximum input 2,8 kW • Top electrical heating element 925 W • Bottom electrical heating element 1035 W • Electric grill 1740 W	
Functions				

Technical drawing & dimensions

