

H 7440 BM

Speed oven

with a seamless design, automatic programmes and combination modes.



- Large clear text display with sensor controls – DirectSensor
- Easy cleaning – compartment with PerfectClean and linen structure
- Faster and more consistent results – Quick & Gentle
- Network-enabled WiFi appliance – Miele@home
- Get what you want in 1 easy step – Quick MW and Popcorn button

EAN: 4002516944706 / Material number: 12821530

Construction type and design	
Appliance colour	Pearl Beige
Built-in speed oven	•
VitroLine	•
User convenience	
3-in-1	Oven, Microwave, Oven with microwave function
Convenience features	
Quick & Gentle	•
Rapid Heat-up	•
Pre-heating	•
Keeping warm	•
Operating modes	
Fan Plus	•
Microwave	•
Microwave + Fan Plus	•
Microwave + Grill	•
Microwave + Fan Grill	•
Microwave with Auto Roast	•
Auto Roast	•
Fan Grill	•
Grill	•
Eco Fan Heat	•
Defrosting	•
Automatic programmes	•
Country-specific Automatic programmes	•
Special applications	•
User convenience	
Networking with Miele@home	•
Display	DirectSensor
SoftOpen	•
SoftClose	•
MultiLingua	•
Popcorn function	•
Time of day display	•
Timer functions	•
Clock synchronisation	•
Date display	•
Minute minder	•
Programmable start of cooking duration	•
Programmable end of cooking duration	•
Programmable cooking duration	•
Actual temperature display	•
Target temperature display	•
Buzzer when desired temperature is reached	•
Recommended temperature	•
Suggestion microwave power	•
Quick microwave	•
User programmes	•
Individual settings	•

H 7440 BM

Speed oven

with a seamless design, automatic programmes and combination modes.



EAN: 4002516944706 / Material number: 12821530

Efficiency and sustainability	
Automatic residual heat utilisation	•
Cleaning convenience	
Stainless steel oven interior with linen structure and PerfectClean	•
Hinged grill element	•
CleanGlass door	•
Safety	
Appliance cooling system and touch-cool front	•
Safety switch-off	•
System lock	•
Sensor lock	•
Technical data	
Oven interior volume in l	43
No. of shelf levels	3
Number of shelf levels oven compartment 1	3
Number of shelf levels oven compartment 2	3
Oven light	1 LED spot
Temperatures in °C	30–250
Electronically controlled microwave power	•
Microwave power levels in W	80 / 150 / 300 / 450 / 600 / 850 / 1000
Niche width min. in mm	560
Niche width max. in mm	568
Niche height min. in mm	450
Niche height max. in mm	452
Niche depth min. in mm	550
Appliance width in mm	595
Appliance height in mm	456
Appliance depth in mm	568
Weight in kg	36.0
Total rated load in kW	2.70
Voltage in V	220-240
Frequency in Hz	50
Fuse rating in A	16
Number of phases	1
Mains cable without plug	•
Length of supply lead in m	2.00
Replacing lamps	Customer Service
Accessories supplied	
Baking and roasting rack with PerfectClean	1
Glass tray	1




H 7440 BM
Speed oven
with a seamless design, automatic programmes and combination modes.




EAN: 4002516944706 / Material number: 12821530	
Available display languages	
Available display languages via MultiLingua	bahasa malaysia, dansk, deutsch, english, español, français, hrvatski, italiano, magyar, nederlands, norsk, polski, português, русский, română, slovenčina, slovenščina, srpski, suomi, svenska, türkçe, українська, čeština, ελληνικ, 中文, 日本語, 繁體中文, 한국어

H 7440 BM Installation diagrams

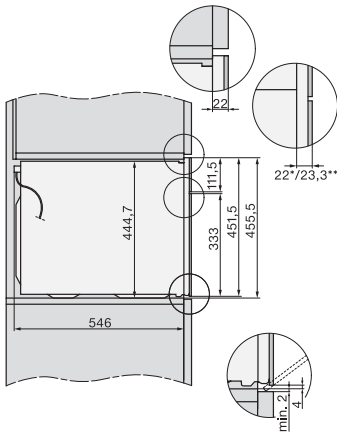


Side view H 7000 BM, installation drawings

22 mm – glass

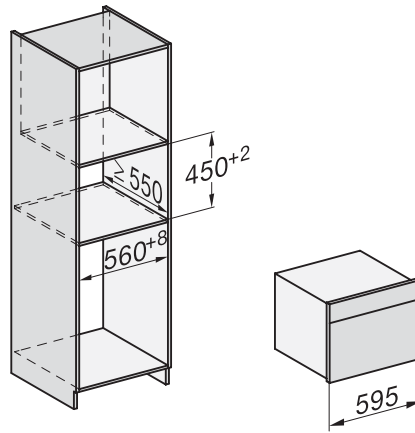


Built-in H 7000 BM, installation drawing

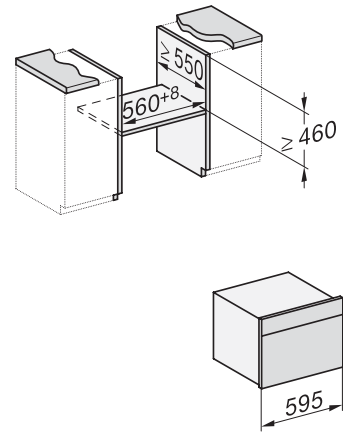


Built-in H 7000 BM build-under, installation drawings

If the oven is to be installed under a hob, follow the instructions for installing the hob and the height of the hob.

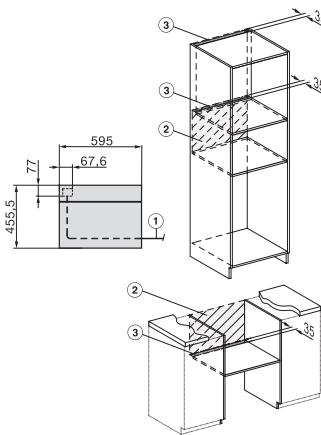


Installation H 7000 BM, installation drawing

1) Mains connection cable, L=2000 mm,
2) No connection in this area, 3) Ventilation cut-out min. 150 cm².

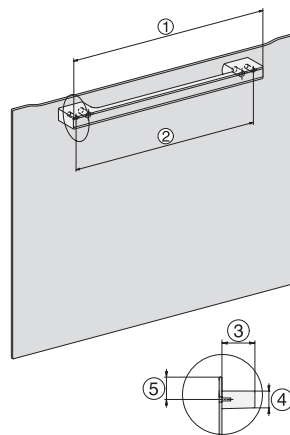


H 7000 handle, glass, installation drawings

1) 400 mm, 2) 360 mm, 3) 47 mm, 4) 27 mm,
5) 32.5 mm

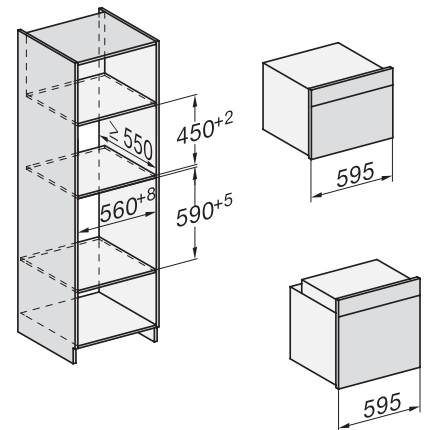


Installation, with a H 7000 BP, installation drawings

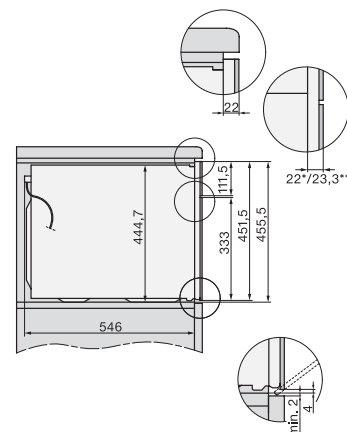


Side view, under bench, installation drawings

22 mm – glass

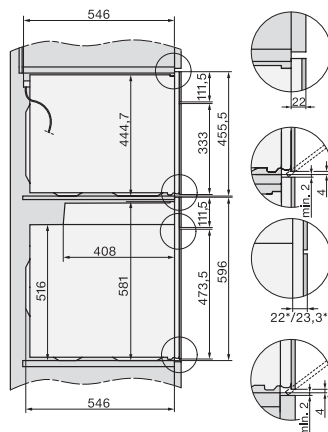

Side view with a H 7000 BP, installation drawings

22 mm – glass

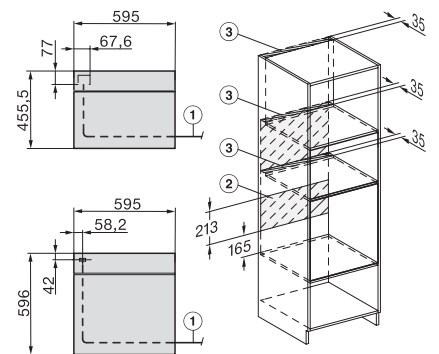

Installation with a H7000 BP, installation drawings

1) Mains connection cable, H 7000 BM L=2000 mm, H 7000 BP L=1500 mm,
2) No connection in this area, 3) Ventilation cut-out min. 150 cm².