

OC63TX cooktop

code OC63TX

ID101106

60cm 3–4 zone ceramic cooktop, touch controls



optional griddle plates

round
9376



rectangular
9379

FINISH	black ceramic glass, 5mm wide, vertical stainless steel trim
ACTUAL SIZE	585mmW x 515mmD
CUTOUT	560mmW x 490mmD x 64mmH
INSTALLATION	suits 60cm cabinet, one-piece hob, built-in design
CAPACITY	5300 watts over three zones — 220mm/290mm diameter, 1400/2400 watt expansion zone 195mm diameter, 1700 watt zone 160mm diameter, 1200 watt zone
THERMOSTAT	three independent control knobs, each of nine heat settings
SAFETY	thermostat ON indicator three residual heat indicators thermal overload protection time limiters audible signals with all touch commands
ELECTRICAL CONNECTION	5300 watt, 22.1 amps, must be hardwired
MINUTE MINDER	1–99 minute variable
OPTIONS	cast-iron griddle plates • rectangular 36cm x 21.5cm, code 9379 • round 24.5cm diameter, code 9376
WARRANTY	two years parts and labour

SUPER ZONE

Cooking utensils up to and over 30cm in diameter fit perfectly over the two-stage expansion zone. The inner zone of 22cm diameter, at a command on the touch controls, expands in cooking area to 29.5cm diameter. Consider this zone for the longer boilers, frypans and paella pans.

TOUCH CONTROLS

Each cooking zone has nine heat levels that can be digitally increased or decreased sequentially or brought to full heat or OFF in a one-touch movement.

CHILD SAFETY LOCK-OUT

When the cooktop is not being used, an extra precautionary child lock-out status can be programmed via the touch controls. This deliberate sequence is most unlikely ever to be accessed by an exploratory toddler.

AUDIBLE PROGRESSION

Every touch selection is accompanied by an audible beep as a reassurance that a touch command has been registered.

RESIDUAL HEAT SAFETY

Each cooking zone's control area will flash 'H' for residual heat if the zone is no longer in use but still retains a residual heat of 60° Celsius or above.

PROUD MOUNT

Conventionally, a cooktop installed into a kitchen bench sits slightly above the bench space and is encased by a trim. The OC63TX trim is only 6mm high and 5mm thick. This design aspect is deliberately without any curve to enhance a modern linear look.

ALTERNATIVE FLUSH MOUNT

The narrow trim, perfectly right-angled at only 5mm thick and 6mm high, lends itself for flush mounting into stone and quartz resin benches. In the hands of a good stonemason and installer, it is possible to rebate the bench by 6mm–7mm and have the 5mm wide stainless steel trim flush with the encasing bench.

INSTALLATION


With only a 64–70mm displacement into the benchtop, the cooktop allows for easy installation underbench of either oven, dishwasher, cupboard or drawers.

omega

OC63TX cooktop

code OC63TX
ID101106


60cm 3–4 zone ceramic cooktop, touch controls

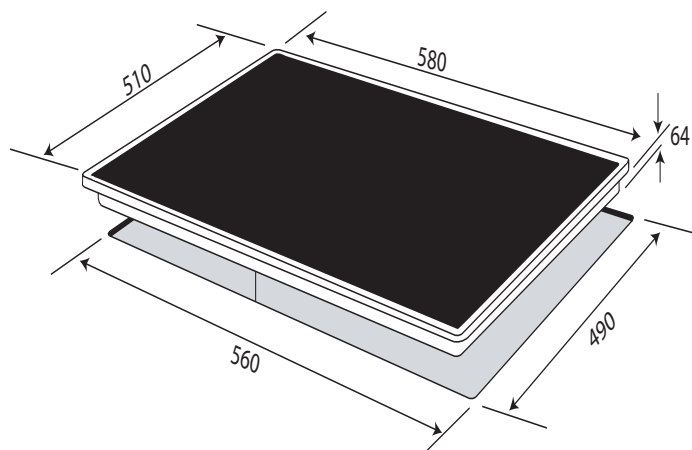

HEIGHT	70mm 6mm above bench 64mm below bench
WIDTH	585mm
DEPTH	515mm
CUTOUT	560mmW x 490mmD x 64mmH
PACKAGED DIMENSIONS	685mm x 600mm x 130mm
GROSS WEIGHT	9.1kg
NET WEIGHT	8.3kg
ELECTRICAL SUPPLY	240 volt, 50 Hz
CAPACITY	4 elements, 3 zones • 1 x 220mm–295mm diameter zone, 1400–2400 watt • 1 x 195mm diameter zone, 1700 watt • 1 x 160mm diameter zone, 1200 watt • each zone thermostatically controlled • each zone of nine heat settings

NB: drawings are not to scale – they are to assist only

PLAN

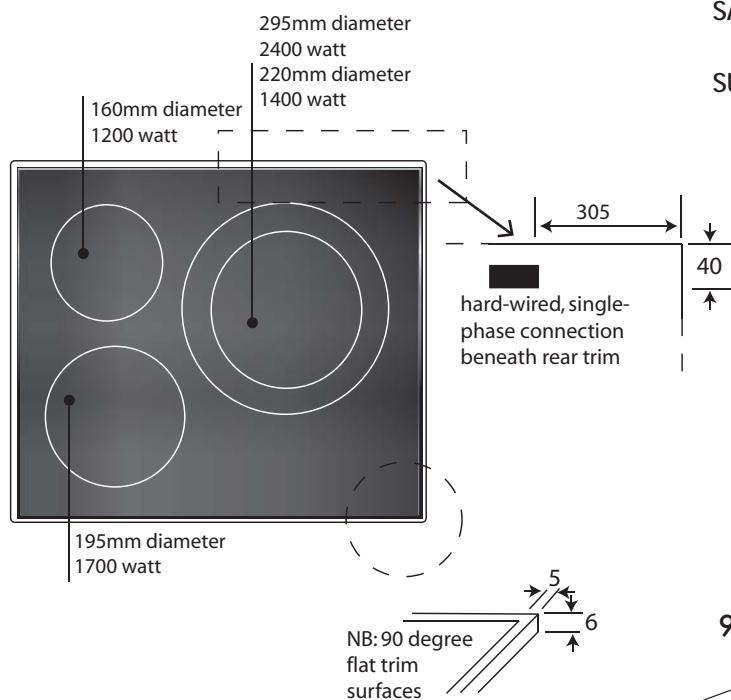


NB: cooktop can be flushmounted into stone and quartz resin benches

CURRENT	22.1 amps
PLEASE NOTE	cooktop must be hardwired
SAFETY	3 x residual heat LEDs, flash H at or above 60°C thermal overload protection
SUPPLIED	clips, seal, instructions for installation, operation, maintenance

OPTIONS

cast-iron griddle plates

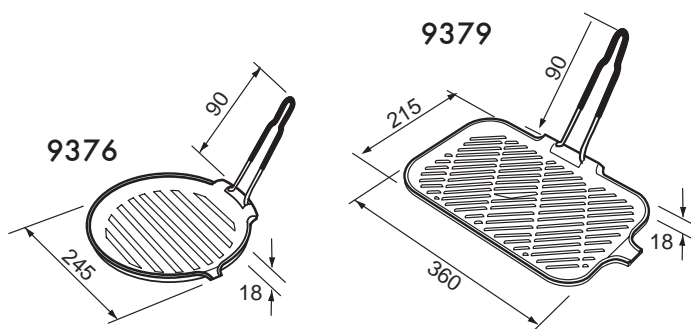

WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.

omega