

SHU771X

Product family	Hood
Hood Type	Integrated hood
Design	Ceiling
Extraction	Recirculation
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709336509



Aesthetics

Aesthetic Colour	Universale Stainless steel	Finishing	Satin
------------------	----------------------------	-----------	-------



Controls

Control setting	Buttons
-----------------	---------

Programs / Functions

No. of speeds	3
Intensive speed	

Technical Features

			
No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Stainless steel
Light Power	1.1 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	780 m³/h	Minimum distance from ELECTRIC hob	600 mm
Motor power	250 W		




	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	300	46
Speed 2	450	55
Speed 3	630	62
Intensive speed	750	66

Accessories Included

Tube reduction Yes

Electrical Connection

Plug	(I) Australia	Voltage	220-240 V
Electrical connection rating	252 W	Frequency (Hz)	50-60 Hz
Current	10 A	Power supply cable length	1500 mm

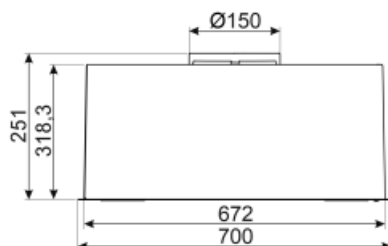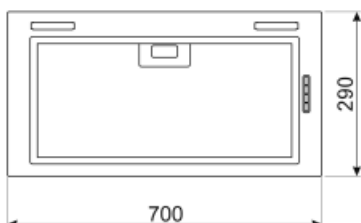

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.