



Underbench Wine Cabinets


VWS830FCB, VWS830FAS

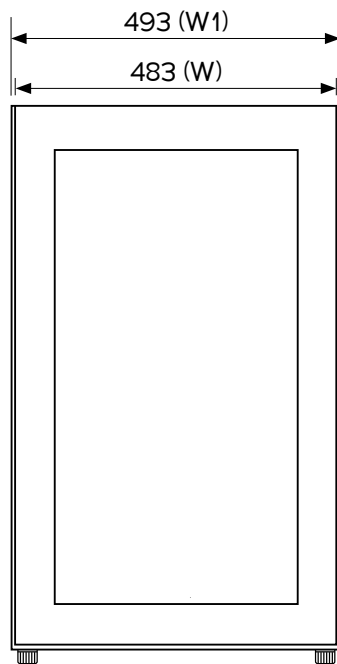

FRONT VIEW

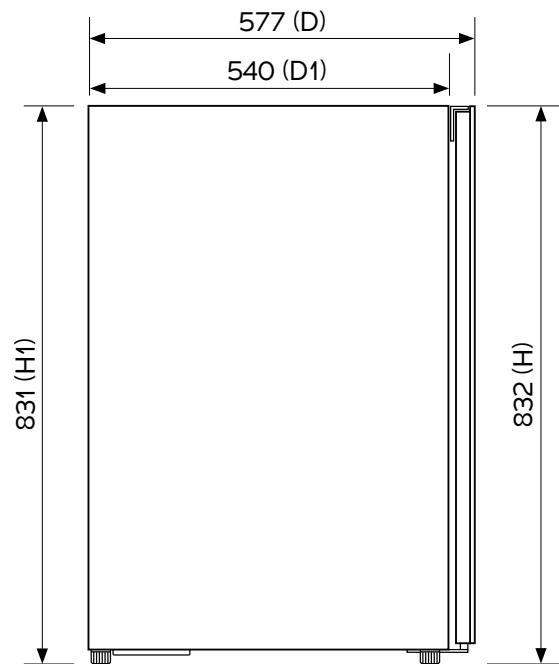


PROFILE VIEW

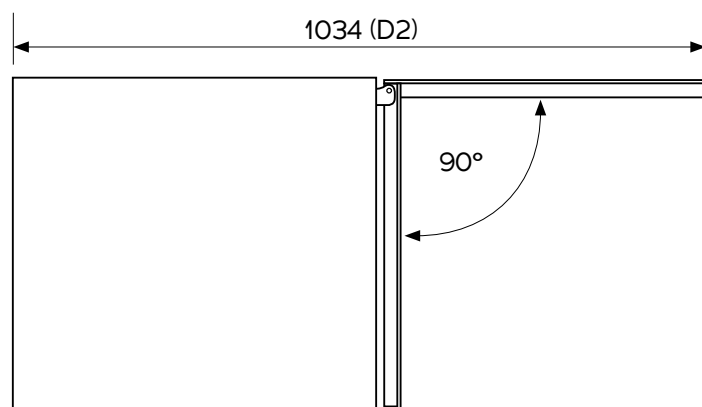

PLAN VIEW

Illustrations are not to scale.
All dimensions are in millimetres.

Door width (W)	Total depth (D)	Max height (H)	Cabinet width (W1)	Cabinet height (H1)	Cabinet depth (D1)	Depth door open (D2)
483	577	832	493	831	540	1034

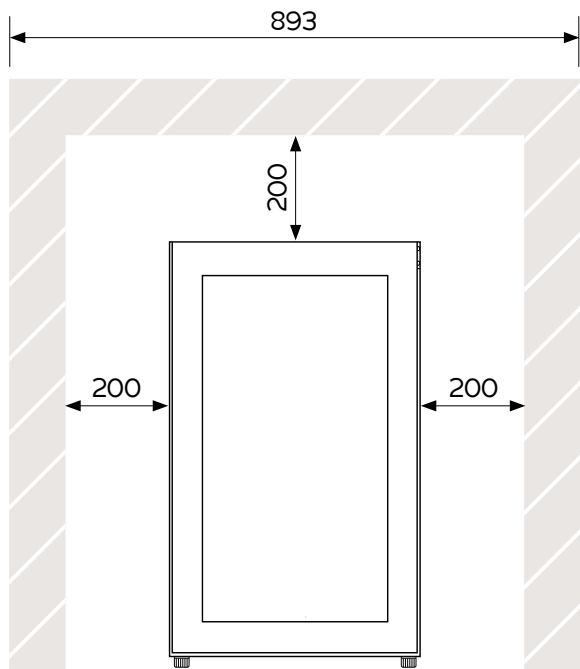

FRONT VIEW

VWS830 models are freestanding wine cabinets. For underbench installation, please follow the instructions outlined here.

Side clearance must be 200mm either side of the wine cabinet, with cabinet door sitting proud of the kitchen cabinet. Top clearance must be 200mm.

Minimum cabinetry opening (WxDxH)


- Door sitting proud installation : 893mm x 570mm x 1031mm
- Flush installation : 893mm x 607mm x 1031mm

When positioned in a corner area, a side space of 195mm + 10mm on the hinge side is required to allow the door to open enough to remove and/or reposition the shelves.

For complete installation instructions, please refer to the user manual.

Installation options for optimal aesthetics (view from the top)

DOOR SITTING PROUD

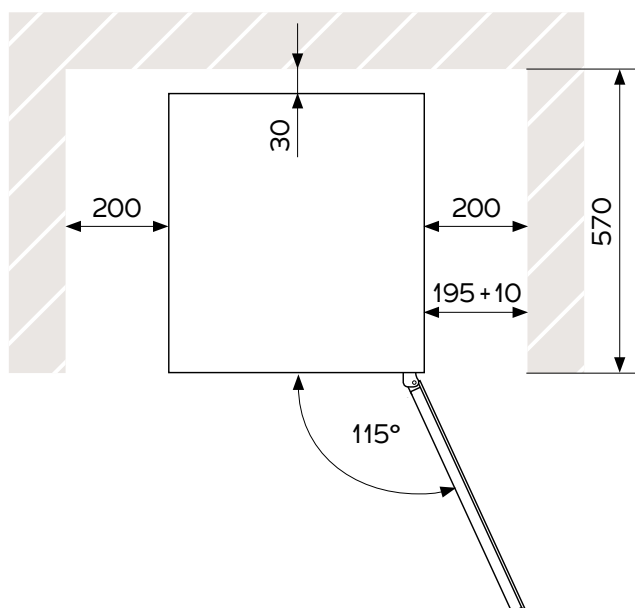

DOOR FLUSH

