

iQ700 Warming drawer BI630CNS1A



The warming drawer is perfect for preheating crockery, for keeping foods warm and for gentle cooking.

- ✓ The heated sheet admits a regulation in four temperature levels from 40°-80°C glass surface temperature
- ✓ The handleless warming drawer is easy to open thanks to the push/pull function.
- ✓ The warming drawer can be installed separately or in combination with a traditional oven or 45 cm compact appliance.

Features

Technical Data

Built-in / Free-standing : Built-in
 Color / Material Front : Black, Stainless steel
 Maximum number of plates : 12
 Maximum number of espresso cups : 64
 Dimensions of the product (mm) : 140 x 595 x 548
 Required niche size for installation (HxWxD) : 140 x 560 x 550
 EAN code : 4242003676578
 Electrical connection rating (W) : 810
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : AU plug



iQ700
Warming drawer
BI630CNS1A

Features

Design

- Cavity volume: 20 net usable litres
- Telescopic pull-out drawer
- Heating plate made of toughened glass

Heating Functions

- Temperature control with 4 levels: 40 °C - 80 °C (glass surface temperature)
- Suitable for:
 - Pre-warming of crockery
 - Keeping drinks and food warm
 - Dough proving
 - Defrosting
 - Slow cooking

Convenience


- push&pull
- Max. loading espresso cups: 64 PC or Max. loading plates: 12 PC
- 140 mm height

Technical Info

- Appliance dimensions (HxWxD): 140 mm x 595 mm x 548 mm
- Installation dimensions (HxWxD): 140 mm x 560 mm - 568 mm x 550 mm
- Max weight up to 25 kg
- Connected load: 0.81 kW
- Length of mains cable: 150 cm


iQ700
Warming drawer
BI630CNS1A

Dimensioned drawings

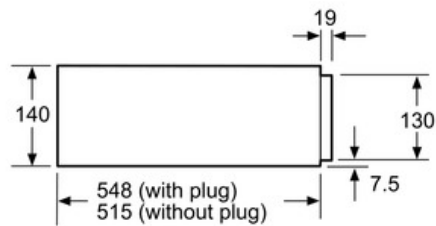

Compact ovens with an appliance height of 455 mm can be installed above a warming drawer. An intermediate floor is not required.

measurements in mm

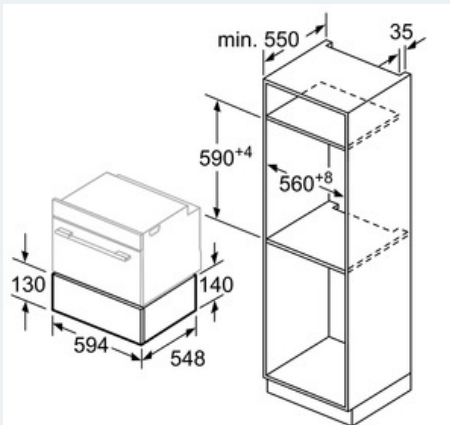

measurements in mm