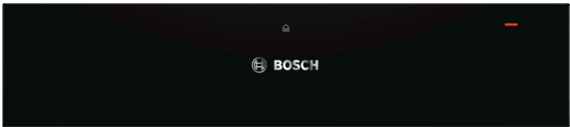# Serie | 8, Built-in warming drawer, 14 cm, Black
BIC630NB1A

The multifunctional warming drawer for the 14 cm niche: for pre-heating crockery, keeping food warm, defrosting and slow cooking.

- **Push-pull mechanism:** easy opening and closing thanks to a practical spring mechanism.
- **Cleaning convenience:** easy-to-clean hotplate made of tempered glass.

Technical Data

Built-in / Free-standing :	Built-in
Color / Material Front :	Black
Maximum number of plates :	12
Maximum number of espresso cups :	64
Dimensions :	140 x 594 x 548
Dimensions of the packed product (HxWxD) (mm) :	
	210 x 660 x 660
Required niche size for installation (HxWxD) :	140 x 560 x 550
EAN code :	4242005243488
Electrical connection rating (W) :	810
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	AU plug

---

4 242005 243488

Serie | 8, Built-in warming drawer, 14 cm, Black
BIC630NB1A

The multifunctional warming drawer for the 14 cm niche: for pre-heating crockery, keeping food warm, defrosting and slow cooking.

- Temperature control with 4 levels: 40 °C - 80 °C (glass surface temperature)
- Suitable for: Pre-warming of cockery, Keeping drinks and food warm, Dough proving, Defrosting, Slow cooking

Design
- Heating plate made of toughened glass
- Handleless push&pull opening mechanism
- User-friendly electronics: extremely easy and comfortable operation
- Cavity volume: 20 l usable litres
- Max. loading espresso cups: 64 PC or Max. loading plates: 12 PC
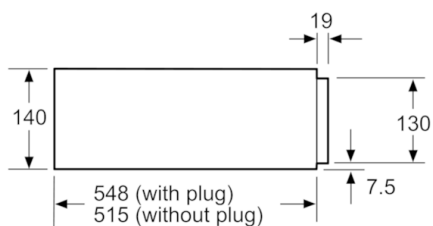
Convenience
- Max weight up to 25 kg

Dimensions
- Appliance dimensions (HxWxD): 140 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 140 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing
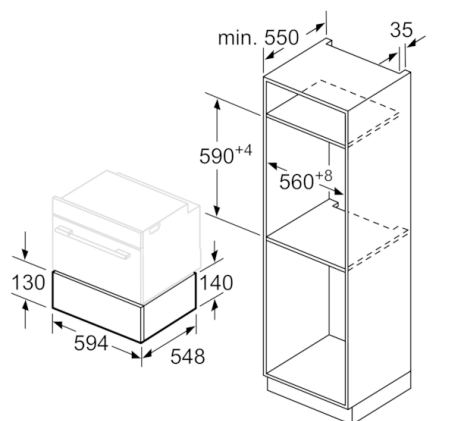
Technical Info
- Length of mains cable: 150 cm
- Total connected load electric: 0.81 KW
- Nominal voltage: 220 - 240 V

Serie | 8, Built-in warming drawer, 14 cm, Black
BIC630NB1A

140   19   130

548 (with plug)
515 (without plug)   7.5

Compact ovens with an appliance
height of 455 mm can be installed
above a warming drawer.
An intermediate floor is not required.

measurements in mm

min. 550   35

590^{+4} 560^{+8}

130   140

594   548

measurements in mm