

D55MH56N0B
52 CM FULLY INTEGRATED RANGEHOOD



COOKING PASSION SINCE 1877



The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.

- ✓ Extraction rate: at 650 m³/h, it quickly ensures optimal kitchen air quality.
- ✓ LED lighting: for perfect, energy-efficient illumination of the cooktop.
- ✓ Intensive speed setting with reset: automatically resets the hood to regular speed setting after 6 min.

Features

Technical Data

Typology : Traditional
Approval certificates : Australia Standards, CE, VDE
Length electrical supply cord (cm) : 150
Required niche size for installation (HxWxD) : 418mm x 496mm x 264mm
Minimum distance above an electric hob : 500
Minimum distance above a gas hob : 650
Net weight (kg) : 9.0
Type of control : Electronic
Maximum output air extraction (m³/h) : 570
Boost position output recirculating (m³/h) : 290
Maximum output recirculating air (m³/h) : 280
Boost position air extraction (m³/h) : 650
Number of lights : 2
Noise level (dB) : 67
Diameter of air outlet (mm) : 150 / 120
Grease filter material : Washable aluminium
EAN code : 4242004187745
Connection Rating (W) : 277
Current (A) : 3
Voltage (V) : 220-240
Frequency (Hz) : 50
Plug type : GB plug
Installation typology : Built-in



4 242004 187745

Optional accessories

Z5135X3 Recirculating kit

D55MH56N0B

52 CM FULLY INTEGRATED RANGEHOOD

Features

Design & Innovation

- For installation in a kitchen cabinet
- Appliance colour: Stainless steel
- Rim ventilation
- metal grease filters with stainless steel cover

Power and Mode of Operation

- Electronic controls
- Push button controls (3 power levels plus intensive setting) with Electronic display
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 570 m³/h
Intensive 650 m³/h
- Noise min./max. Normal Level: 53/67 dB
Noise max. Intensive setting: 70 dB
- Suitable for ducted extraction and recirculation
- Accessories required for recirculated extraction: Recirculating kit

Comfort & Convenience


- Automatic intensive revert setting - 6 min
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
Max. normal use: 67 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
Intensive: 70 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Twin channel high performance fan motor
- 2 x 1 Watt LED lights
- Dishwasher safe metal grease filters

Technical Information


- Built-in dimensions: width: 50 cm, depth: 26 cm
- Dimensions exhaust air (HxWxD): 418-418 x 520 x 300 mm
- 120 or 150 mm tube connection diameter
- Power rating: 277 W
- Average Energy Consumption: 107.7 kWh/year
- Electrical cable length 1.5 m

D55MH56N0B
52 CM FULLY INTEGRATED RANGEHOOD


Dimensioned drawings



measurements in mm

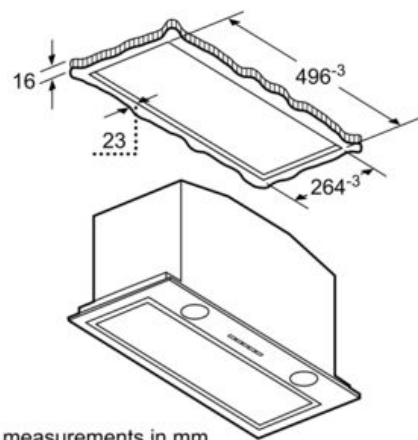

measurements in mm

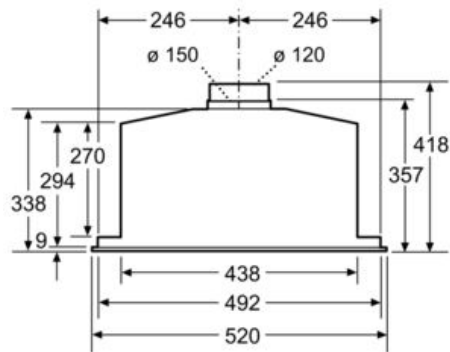

measurements in mm