

SFA9310XR

Smeg 90cm Classic Thermoseal Oven

## COMMERCIAL ONLY PRODUCT





#### **THERMOSEAL**

The seal of Smeg's quality, technical excellence and taste: succulent roasts, crisp pastry and impressive baking is achieved in Smeg's unique, perfectly controlled cooking environment. Thermoseal maintains the perfect atmospheric balance in the cavity for optimum cooking conditions.



#### EAN 8017709210816

Finish Fingerprint proof stainless steel Eclipse high visibility black glass

Total functions 10 functions
Display Digital touch
Capacity 90L
Cooking levels 4

Thermostat 50 - 280°C

Installation Flush, underbench or wallmount

Programmability Fully programmable

Cleaning Smeg Ever Clean enamel, Vapour Clean

Lighting $2 \times 40$  Watt halogenSupplied accessories $1 \times$  Chrome grill insert<br/> $1 \times$  Chrome shelves

1 x 40mm enamelled baking tray

Optional accessories PRTX - Pizza Stone

PALPZ - Single-handle pizza paddle

SSDPLUS - Baking Dish

Safety Cool Door technology, thermal protection system

Power 220-240V, 50/60Hz

3000VV 15A current

Warranty Two years parts and labour



### VAPOUR CLEAN

Smeg's Ever Clean enamel's tough surface has a glassy finish, so a simple spray of water and detergent around the cavity in conjunction with the Vapour Clean option will generate heat and steam to soften any grease for a wipe-clean result.



#### **EVER CLEAN ENAMEL**

The superior quality of Smeg's patented Ever Clean enamel, which is highly durable and easy to clean, is the result of nearly 70 years of enameling expertise; ensuring long-life performance of every Smeg oven.





### COOL DOOR TECHNOLOGY

Smeg's Cool Door system is a combination of technologies which is driven by a 22 blade tangential fan and includes a heat exchange baffle system. It draws cool air up through the panes of heat-reflective glass in the door, making it safe to the touch even when the oven is at pyrolytic temperatures of around 500°C.




SFA9310XR

Smeg 90cm Classic Thermoseal Oven

# COMMERCIAL ONLY PRODUCT

#### **FUNCTIONS:**



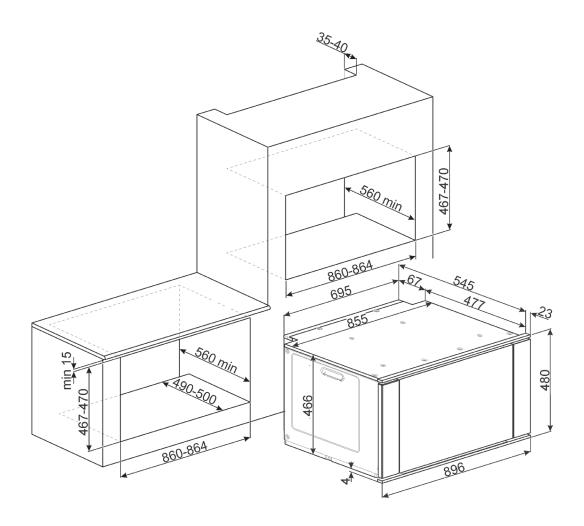

PLEASE NOTE: Drawings are not to scale. They are to assist only.

**CABINETRY:** Cut-outs are indicated for proud mounting. For flush mounting please refer to a specialist installer. **VENTILATION:** Ovens and compact ovens require a 35-40mm ventilation gap at the rear of the cabinet.