

CSA150X freestanding cooker

ID090708
code CSA150X

150cm freestanding cooker, two thermosealed electric ovens
seven zone, eight burner gas hob with electric plate



kickplate



Canali knobs

SUPPLIED



GO120 griddle




TPKX teppanyaki

OPTION



GC120 griddle

FOR RIGHT-HAND OVEN

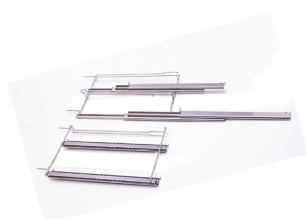

GT13X telescopic shelf racks



GT123DX telescopic shelf racks

finish
installation
dimensions

satin stainless steel
freestanding
1500mmW x 600mmD x 900mmH
NB: height adjustable 895–915mm — height excludes supplied and optionally fitted 55mmH rear splashguard

LEFT-HAND OVEN

capacity 92 litre gross, 78.7 litre net
thermostat 50–250° Celsius
multifunction 8 cooking functions plus defrost
fully programmable digital analogue clock, time of day full auto cooking, semi auto cooking minute minder, manual override

furniture

grill | roasting | baking tray
grill grid, 2 x chromed-wire shelves
non-stick tray
rotisserie/kebab assemblies

RIGHT-HAND OVEN

capacity 66.47 litre gross, 53.76 litre net
thermostat 50–250° Celsius
multifunction 8 cooking functions plus defrost*
fully programmable digital analogue clock, time of day full auto cooking, semi auto cooking minute minder, manual override

furniture

grill | roasting | baking tray
grill grid, chromed-wire shelf
pizza stone, pizza shovel
round enamel floor insert to replace pizza stone

optional

2-level, 75% telescopic shelf racks GT13X
3-level, 110% telescopic shelf racks GT123DX, code 23911

BOTH OVENS

- fitted self-cleaning catalytic wall liners, set of three per oven, removable, replaceable
large oven: CC/70/90, code 9970/90
auxiliary oven: CC/60, code 9970
- removable roof liners
- AA anti-acid easy-clean enamelling
- safety-grip handles for grill tray
- full-width storage drawer below ovens
- optional kickplate, stainless steel, KIT2A5, code 9393/1

COOKTOP

eight gas burners, 68.7 mj/hr maximum over seven zones
one 1600 watt electric rectangular zone with hinged element

gas

- ultra rapid (wok) dual control 18.6 mj/hr max — 15 mj/hr outer, 3.6 mj/hr inner
- ultra rapid (wok) 15 mj/hr max
- fish burner 7.8 mj/hr max
- large rapid burner 12.0 mj/hr max
- semi-rapid burner 7.5mj/hr max
- 2 x auxiliary burners 3.9 mj/hr max each

gas input

— set for natural gas, regulator supplied
— adaptable for ULPG, no regulator required

ignition

— automatic, electronic

accessories, supplied

- three heavy-duty cast-iron trivets
- flat non-stock griddle, warming plate
- wok stand
- open pattern cast-iron griddle, GO120
- teppanyaki TPKX

accessories, optional

- closed pattern cast-iron griddle, GC120

safety

super flame failure device (SFFD) fitted to each of the eight burners

appliancesonline
.com.au


Australia's largest online appliance retailer



CSA150X freestanding cooker

ID090708
code CSA150X

150cm freestanding cooker, two thermosealed electric ovens
seven zone, eight burner gas hob with electric plate

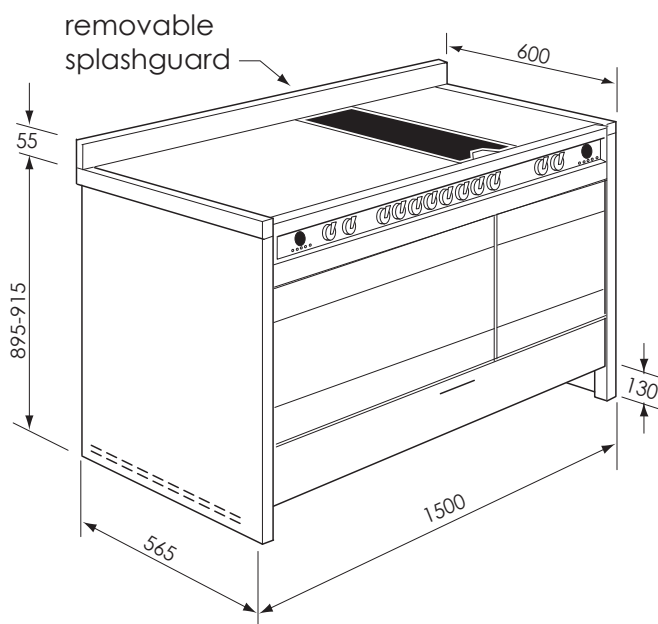

height

nominal 900mm, adjustable 893mm-915mm;
height does not include optionally fitted and
supplied 55mmH rear splashguard

width

1500mm

depth

600mm

packaged dimensions

1270mm x 1050mm x 740mm = 0.99m³

net weight

169kg

gross weight

184kg

CAPACITIES

left-hand oven

internal oven dimensions 340mmH x 615mmW x 440mmD = 92 litres

net cooking dimensions 310mmH x 605mmW x 420mmD = 78.7 litres

right-hand oven

internal oven dimensions 340mmH x 460mmW x 425mmD = 66.47 litres

net cooking dimensions 315mmH x 450mmW x 380mmD = 53.86 litres


both ovens

electricity supply 240 volt, 50 Hz


electrical connection hard-wired single phase

maximum wattage 7586 watts


current 31.61 amps

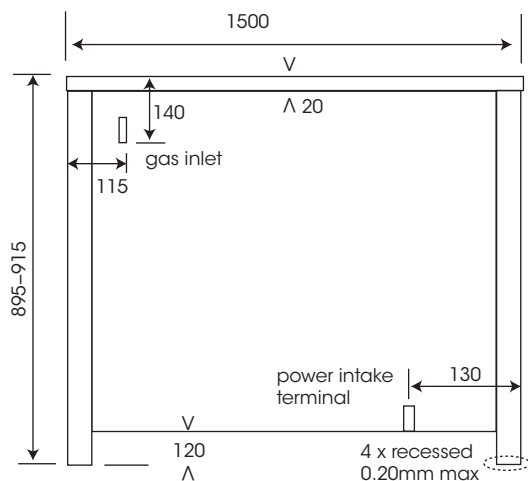

REAR ELEVATION

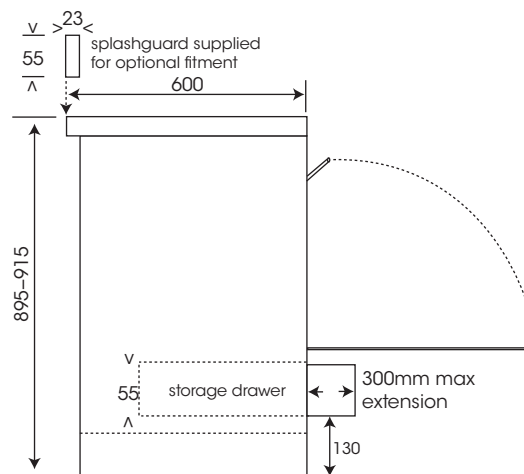

SIDE ELEVATION

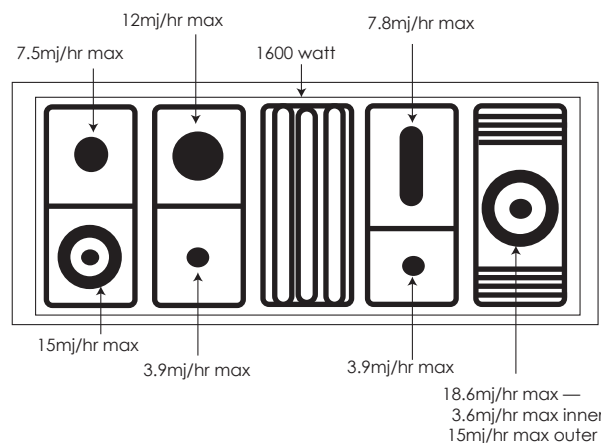

NB: drawings are not to scale — they are to assist only



appliancesonline
com.au
smeg

WARNING: technical specifications and product sizes can be varied by the manufacturer, without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.

CSA150X freestanding cooker

ID090708
code CSA150X

150cm freestanding cooker, two thermosealed electric ovens
seven zone, eight burner gas hob with electric plate

HOB	68.7 mj/hr max
eight burners	ultra-rapid dual control 18.6 mj/hr max — inner 3.6 mj/hr — outer 15 mj/hr ultra-rapid triple crown 15 mj/hr large rapid 12 mj/hr fish 7.8 mj/hr semi rapid 7.5 mj/hr 2 x auxiliary 3.9 mj/hr each
electric plate	1600 watt

gas connection	• ½" BSP gas inlet connection • ½" BSP 1.0 kPa natural gas regulator supplied • adaptable for ULPG, no regulator required • SFFD (super flame failure device) fitted to each of the eight burners
supplied with hob	• three heavy-duty cast-iron trivets • removable rectangular non-stock hotplate • removable stainless steel drip tray • hinged 1600 watt element • wok stand • rectangular open pattern cast-iron griddle, GO120 • rectangular stainless steel teppanyaki

LEFT-SIDE OVEN

element		roof		floor		rear wall	rear wall fan	cooling fan	lights (1)	roisserie	max wattage	current amps
		inner	outer	inner	outer							
wattage		2000	1050	1140	760	2000	25	28	20	20		
fan forced						•	•	•	•		2073	8.7
super fan forced				•		•	•	•	•		3213	13.4
bakers function				•			•	•	•		1213	5.1
fan assisted			•	•	•		•	•	•		3023	12.6
fan grill		•	•				•	•	•		3123	13.1
static grill		•	•					•	•		3098	12.9
classic convection			•	•	•			•	•		2998	12.5
roisserie		•	•					•	•	•	3118	13.0
defrost							•	•	•		73	0.3

RIGHT-SIDE OVEN

element		roof		floor	rear wall	rear wall fan	cooling fan	lights (1)	max wattage	current amps
		inner	outer							
wattage		1700	1000	760	2000	25	28	20		
fan forced					•	•	•	•	2073	8.7
super fan forced				•	•	•	•	•	2833	11.8
bakers function				•		•	•	•	833	3.5
fan assisted			•	•		•	•	•	1833	7.7
fan grill		•	•			•	•	•	2773	11.6
static grill		•	•				•	•	2748	11.5
classic convection			•	•			•	•	1808	7.6
pizza				•			•	•	808	3.4
defrost*						•	•	•	73	0.3

*defrost with any fan function and thermostat set at zero

WARNING: technical specifications and product sizes can be varied by the manufacturer, without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.