

Serie | 2 Ventilation

DWB96BC50A
90 cm Wall-Mounted Stainless Steel Canopy Rangehood



Canopy hood: perfect performance matching your kitchen.

- **Push buttons:** simply modify the desired power level settings with mechanic control.
- **Extraction rate:** at 590 m3/h, it quickly ensures optimal kitchen air quality.
- **Silent:** maximum extractor performance with little noise

Technical Data

Color chimney :	Stainless steel
Typology :	Chimney
Approval certificates :	Australia Standards, VDE
Length electrical supply cord (cm) :	130
Height of the chimney (mm) :	583-912/583-1022
Height of product, without chimney (mm) :	53
Net weight (kg) :	16.0
Type of control :	mechanical
Number of speed settings :	3
Maximum output air extraction (m3/h) :	590
Maximum output recirculating air (m3/h) :	350
Number of lights :	2
Noise level (dB) :	70
Diameter of air outlet (mm) :	150 / 120
Grease filter material :	Washable aluminium
Odour filter :	No
Operating Mode :	Convertible
Optional accessories :	DHZ1225, DHZ1235, DHZ9550, DHZ9551, DSZ5201, DSZ6200, DWZ0DX0A0, DWZ0DX0U0, DWZ0XX0I0, DWZ0XX0J0, DZZ0XX0P0
Type of lamps used :	LED
Grease filter type :	Kassette
Connection Rating (W) :	220
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	AU plug
Installation typology :	Wall-mounted
Material body :	Stainless steel
Approval certificates :	Australia Standards, VDE
Plug type :	AU plug
Dimensions of the product, with chimney (if exists) (in) :	/ x x
Dimensions of the packed product (in) :	15.94 x 23.42 x 38.77
Net weight (lbs) :	35
Gross weight (lbs) :	40
Motor location :	Integrated motor in hood chimney
No-return airflow flap :	Yes
Length electrical supply cord (cm) :	130
Dimensions of the product, with chimney (if exists) (mm) :	635-1075 MM x 900 x 500
Dimensions of the packed product (HxWxD) (mm) :	405 x 595 x 985
Net weight (kg) :	16.0
Gross weight (kg) :	18.0



Optional accessories

DHZ1225 Chimney extension 1000 mm, DHZ1235 Chimney extension 1500 mm, DHZ9550 Brushed steel back panel, DHZ9551 Brushed steel back panel, DSZ5201 CleanAir active carbon filter spare part, DSZ6200 CleanAir Recirculation Kit, DWZ0DX0A0 Active carbon filter, DWZ0DX0U0 Recirculating kit, DWZ0XX0I0 Integrated CleanAir Recirculation Kit, DWZ0XX0J0 Integrated CleanAir Recirculation Kit, DZZ0XX0P0 CleanAir act.carbon filter regenerative

Serie | 2 Ventilation

DWB96BC50A

90 cm Wall-Mounted Stainless Steel Canopy Rangehood

Canopy hood: perfect performance matching your kitchen.

Design & Innovation

- Box design
- Appliance colour: Stainless steel

Power and Mode of Operation

- 3 power settings via Push button
- Extraction rate exhaust air according to EN 61591: max. 590 m³/h
- Extraction rate in recirculation mode:
Max. normal use: 350 m³/h
- Ducted and recirculated-air operation
- Accessories required for recirculation mode: CleanAir Module
- Push button controls for power and light
- Twin channel high performance fan motor
- Noise min./max. Normal Level: 49/70 dB
Noise max. Intensive setting: NO_FEATURE dB
- Noise level in recirculation mode:
Max. normal use: 75 dB(A) re 1 pW (63 dB(A) re 20 µPa sound pressure)
- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)
- Average Energy Consumption: 43.4 kWh/year
- Power rating: 220 W

Comfort & Convenience

- with one-way flap: prevents outside air from entering your kitchen
- Dishwasher safe metal grease filters
- 2 x 1.5W LED



Dimensions (HxWxD)

- Appliance width: 900 mm
- Dimensions exhaust air (HxWxD): 635-965 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 635-1075 x 900 x 500 mm
- Dimensions - Recirculated with cleanAir module (HxWxD):
703 x 900 x 500 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.3 m

Serie | 2 Ventilation

DWB96BC50A

90 cm Wall-Mounted Stainless Steel Canopy Rangehood

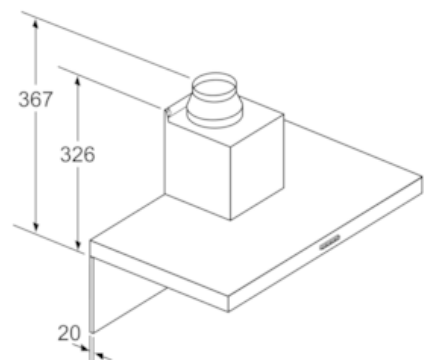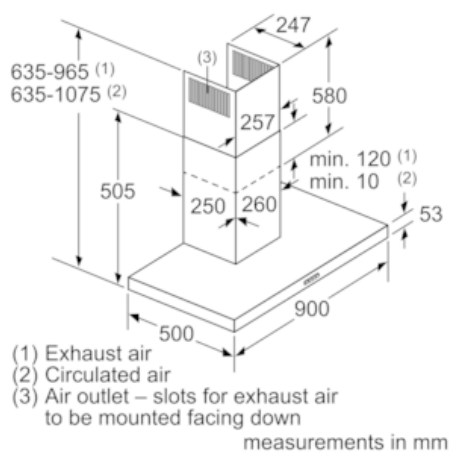

If a back panel is used, the design of the appliance must be considered.

measurements in mm

