

Serie | 4 Hoods**DFR097A50A**
90 cm Slideout Rangehood

The slideout rangehood practically disappears into your upper cabinet, giving you a sleek kitchen finish.

- **Extraction rate:** at 740 m³/h, it quickly ensures optimal kitchen air quality.
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- **Intensive speed setting with reset:** automatically resets the hood to regular speed setting after 6 min.
- **Especially quiet:** just 50 dB (340 m³/h / level 2) - 150 mm ducted.

Technical Data

Typology :	Pull-out
Approval certificates :	CE, VDE
Length electrical supply cord (cm) :	175
Required niche size for installation (HxWxD) :	385mm x 524mm x 290mm
Minimum distance above an electric hob :	430
Minimum distance above a gas hob :	650
Net weight (kg) :	13.0
Type of control :	Electronic
Maximum output air extraction (m ³ /h) :	420
Boost position output recirculating (m ³ /h) :	510
Maximum output recirculating air (m ³ /h) :	300
Boost position air extraction (m ³ /h) :	740
Number of lights :	2
Noise level (dB) :	55
Diameter of air outlet (mm) :	150 / 120
Grease filter material :	Washable aluminium
EAN code :	4242002878188
Connection Rating (W) :	146
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	AU plug
Installation typology :	Built-in



4 242002 878188

Serie | 4 Hoods

DFR097A50A

90 cm Slideout Rangehood

The slideout rangehood practically disappears into your upper cabinet, giving you a sleek kitchen finish.

Power and Mode of Operation

- Maximum extraction 740 m³/h
- 3 power settings plus intensive setting
- Ducted and recirculated-air operation

Design & Innovation

- Appliance colour: Steel body, metallic finish
- Electronic controls with low-lift push buttons
- 2 x 3 Watt LED Lights

Convenience

- Intensive operation automatic revert - 6min
- Automatic run on - 10 min
- Noise min./max. Normal Level: 43/55 dB
Noise max. Intensive setting: 68 dB
- Easy installation system

Cleaning

- Dishwasher safe metal grease filters

Safety and Quality

- EcoSilence BLDC brushless motor
- 2 year warranty

Dimensions (HxWxD)

- Appliance dimensions (HxWxD): 426 x 898 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm


Technical Information

- Power rating: 146 W
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Accessories required for recirculation mode: CleanAir Module
- Install into a 60cm or 90cm cupboard
- Drawer without handle, furniture lighting pelmet or profile panel (optional accessory) required

Serie | 4 Hoods


DFR097A50A

90 cm Slideout Rangehood

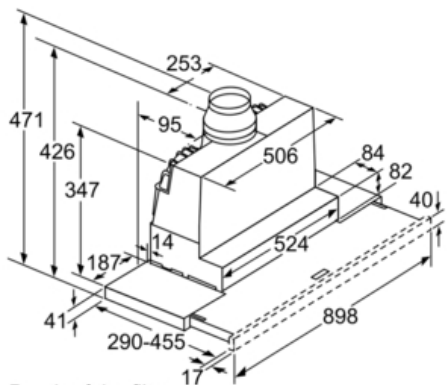


Depth of the filter drawer can be adjusted by up to 29 mm

measurements in mm

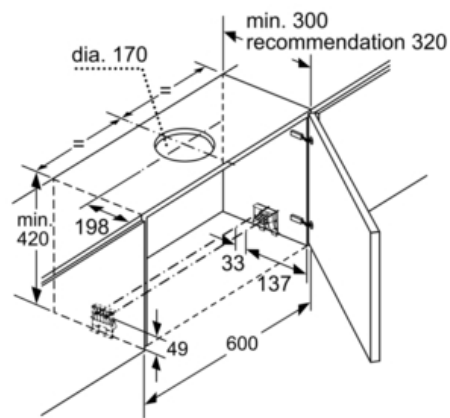


measurements in mm

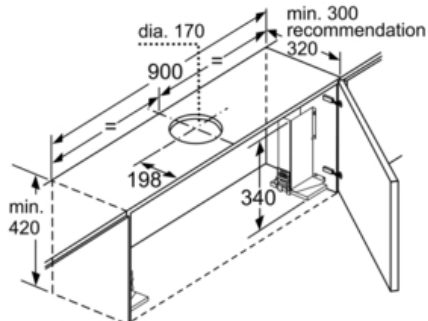


When installing the 90 cm telescopic hood in a 90 cm wide wall-hanging cupboard, a mounting kit is required. The two mounting brackets are screwed onto the left and right of the kitchen unit. Installation in accordance with template.


measurements in mm

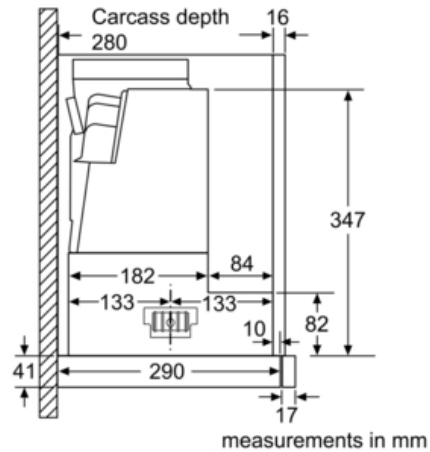

measurements in mm

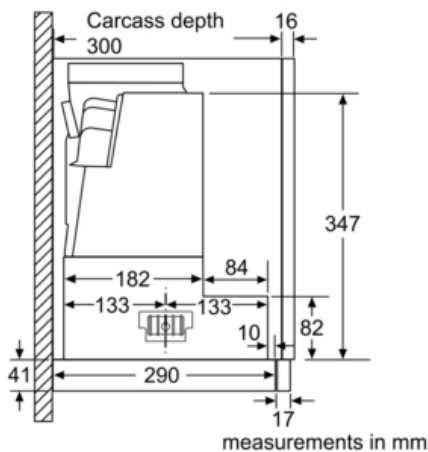

measurements in mm

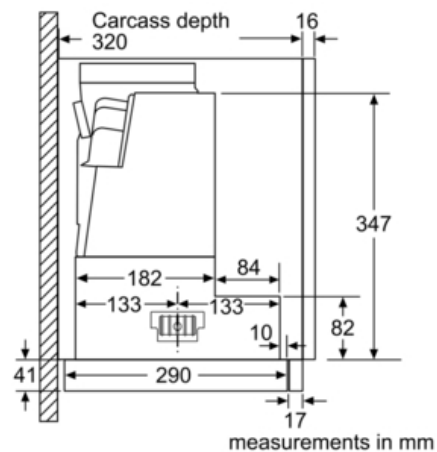

measurements in mm

Serie | 4 Hoods

DFR097A50A

90 cm Slideout Rangehood

